

worldpay

**eComm PayFac™ API Reference
Guide**

April 2024

API Release: 14.1

Document Version: 4.0

eComm PayFac API Reference Guide Document Version: 4.0

All information whether text or graphics, contained in this manual is confidential and proprietary information of FIS and is provided to you solely for the purpose of assisting you in using a FIS product. All such information is protected by copyright laws and international treaties. No part of this manual may be reproduced or transmitted in any form or by any means, electronic, mechanical or otherwise for any purpose without the express written permission of FIS. The possession, viewing, or use of the information contained in this manual does not transfer any intellectual property rights or grant a license to use this information or any software application referred to herein for any purpose other than that for which it was provided. Information in this manual is presented "as is" and neither FIS or any other party assumes responsibility for typographical errors, technical errors, or other inaccuracies contained in this document. This manual is subject to change without notice and does not represent a commitment on the part FIS or any other party. FIS does not warrant that the information contained herein is accurate or complete.

Worldpay, the logo and any associated brand names are trademarks or registered trademarks of FIS and/or its affiliates in the US, UK or other countries. All other trademarks are the property of their respective owners and all parties herein have consented to their trademarks appearing in this manual. Any use by you of the trademarks included herein must have express written permission of the respective owner.

Copyright © 2024, FIS and/or its affiliates - ALL RIGHTS RESERVED.

CONTENTS

About This Guide

Intended Audience	ix
Revision History	ix
Document Structure	xiv
Documentation Set	xiv
Typographical Conventions	xv
Contact Information.....	xvi

Chapter 1 Introduction

Legal Entity Processing	3
API Summary	5
Header Information	7

Chapter 2 PayFac API Certification Tests

Testing Legal Entity Transactions	10
Creating Legal Entities	10
Creating Canadian Legal Entities	11
Updating Legal Entities	12
Updating Canadian Legal Entities.....	13
Retrieving Legal Entity Information	15
Retrieving Canadian Legal Entity Information.....	16
Testing Sub-Merchant Transactions	17
Creating Sub-Merchants	17
Creating Canadian Sub-merchants.....	18
Updating Sub-Merchant information	19
Updating Canadian Sub-Merchant Information.....	20
Retrieving Sub-Merchant Information	22
Retrieving Canadian Sub-Merchant Information	22
Retrieve Allowed MCC List	23

Chapter 3 PayFac API Transaction Examples

Create Legal Entity Agreement.....	26
Create Legal Entity Agreement Request Message	26
Create Legal Entity Agreement Response Message	27
Legal Entity Agreement Retrieval Request	28
Legal Entity Agreement Retrieval Response	28
Create Legal Entity	31
Notes About Background Checks	31

Notes About Required Fields 31

Create Legal Entity Request Message 32

Create Legal Entity Response Message..... 34

Update Legal Entity..... 38

 Update Legal Entity Request 39

 Update Legal Entity Response 40

Retrieve Legal Entity..... 44

 Retrieve Legal Entity Response..... 44

Create a Principal 49

 Principal Create Request 49

 Principal Create Response 50

Delete a Principal..... 52

 Delete a Principal Response..... 52

Create Sub-Merchant..... 54

 Create Sub-Merchant Request 54

 Create Sub-Merchant Response 58

Update Sub-Merchant..... 61

 Update a Sub-Merchant..... 62

 Update a Sub-Merchant Response..... 63

Retrieve Sub-Merchant..... 64

 Retrieve Sub-Merchant Response 64

Retrieve Allowed MCC List 68

 Retrieve MCC List Response..... 68

Status Codes and Error Messages 69

 Error Response Message 69

Chapter 4 PayFac API XML Elements

acceptanceDateTime 72

address 73

addressVerified 74

agreements 75

agreementVersion..... 76

allowedTransactionType 77

amexAcquired 78

amexMid 79

amexSellerId 80

annualCreditCardSalesVolume..... 81

approvedMcc 82

approvedMccResponse 83

approvedMccs..... 84

backgroundCheckDecisionNotes..... 85

backgroundCheckFields 86

backgroundCheckResults 87

bankAccountNumber	88
bankRoutingNumber	89
bankruptcyCount	90
bankruptcyData	91
bankruptcyType	92
business	93
businessToPrincipalAssociation	95
categoryType	96
city	97
cityVerified	98
code	99
companyName	106
contactPhone	107
countryCode	108
createCredentials	109
credentials	110
customerServiceNumber	111
dateOfBirth	112
decisionDate	113
description	114
disable	115
disabled	116
discoverConveyedMid	117
dobVerified	118
doingBusinessAs	119
driversLicense	120
driversLicenseState	121
eCheck	122
eCheckBillingDescriptor	123
eCheckCompanyName	124
emailAddress	125
error	126
errorResponse	127
errors	128
feeProfile	129
filingDate	130
firstName	131
fraud	132
fundingSubmerchantId	133
hardCodedBillingDescriptor	134
hasAcceptedCreditCards	135
language	136
lastName	137

legalEntityAgreement..... 138

legalEntityAgreementCreateRequest..... 139

legalEntityAgreementCreateResponse 140

legalEntityAgreementRetrievalResponse 141

legalEntityAgreementType 142

legalEntityCreateRequest 143

legalEntityCreateResponse 144

legalEntityId 145

legalEntityName..... 146

legalEntityOwnershipType 147

legalEntityPrincipalCreateRequest 148

legalEntityPrincipalCreateResponse..... 149

legalEntityPrincipalDeleteResponse 150

legalEntityResponse 151

legalEntityRetrievalResponse 152

legalEntityType 153

legalEntityUpdateRequest 154

lienResult 155

lienType 156

manuallyEntered..... 157

maxTransactionAmount 158

merchantCategoryCode..... 159

merchantCategoryTypes..... 160

merchantIdentString..... 161

merchantName 162

method 163

methodOfPayments 164

nameAddressPhoneAssociation 165

nameAddressSsnAssociation 166

nameAddressTaxIdAssociation 167

nameVerified..... 168

originalLegalEntityId..... 169

originalLegalEntityStatus 170

originalSubMerchant..... 171

overallScore 172

password..... 173

passwordExpirationDate 174

paymentType 175

paypageCredential..... 176

paypageCredentials 177

paypageId 178

phone 179

phoneVerified..... 180

postalCode 181

primaryContact..... 182

principal..... 183

principalId..... 188

pspMerchantId 189

purchaseCurrency..... 190

releasedCount..... 191

response 192

responseCode..... 193

responseDescription 194

riskIndicator..... 195

riskIndicators..... 196

score 197

sdkVersion 199

selectedTransactionType..... 200

settlementCurrency..... 201

ssn 202

ssnVerified 203

stakePercent 204

state 205

stateVerified 206

stateProvince 207

streetAddress1, streetAddress2..... 208

subMerchantCreateRequest..... 209

subMerchantCreateResponse 210

subMerchantFunding 211

subMerchantId 212

sub_merchant_processing_status 213

subMerchantRetrievalResponse..... 214

subMerchantUpdateRequest..... 215

taxAuthority 216

taxAuthorityState..... 217

taxId 218

taxIdVerified 219

tinValidationStatus 220

title 221

transactionId 222

unreleasedCount..... 223

updateDate 224

url..... 225

userFullName..... 226

userIPAddress 227

username 228

userSystemName	229
verificationIndicators	230
verificationResult.....	231
yearsInBusiness.....	233
zip	234
zip4	235
zipVerified	236

About This Guide

This manual serves as a reference to the PayFac Merchant Provisioner API. The guide provides information about the transaction formats used to create, update, and retrieve (information about) Legal Entities and Sub-Merchants. It also explains how to perform PayFac API certification testing with us.

Intended Audience

This document is intended for technical personnel creating code to interface with the Worldpay eCommerce Merchant Provisioner API.

Revision History

This document has been revised as follows:

TABLE 1 Document Revision History

Doc. Version	Description	Location(s)
4.0	Updated document for new elements schema V14.0 and V14.1. Added Notes about validation to the following elements: legalEntityName, doingBusinessAs, taxId, firstName, lastName, ssn, contactPhone, dateOfBirth, maxTransactionAmount, streetAddress1, streetAddress2, city, stateProvince, and postalCode.	All Chapter 4
3.6	Added FraudSight to locations mentioning the <fraud> element.	Chapters 2 and 4
3.5	Added items you can change with a subMerchantUpdateRequest. Corrected username, which was (incorrectly) userName.	Chapters 3 and 4 Chapters 3 and 4
3.4	Added “no dashes” Note to the TaxId element.	Chapter 4
3.3	Added info about two new elements: language and sdkVersion.	Chapter 4
3.2	Added error code 429 for too many concurrent connections.	Chapter 3

TABLE 1 Document Revision History

Doc. Version	Description	Location(s)
3.1	Changed the response message for error code 500.	Chapter 3
3.0	Re-branded document to Worldpay.	All
2.6	Corrected namespace (xmlns) attribute in Create Sub-merchant examples.	Chapter 3
2.5	Added notes about requirement to include <code>contactPhone</code> and <code>emailAddress</code> for the Principal if sub-merchant processes Visa transactions.	Chapters 3 and 4
2.4	Correction: <code><url></code> element listed as optional, but required. Added info to <code>amexMid</code> note to specify it is not required if processing American Express Opt Blue. Also, fixed examples to reflect to include <code>amexMid</code> when <code>amexAcquired enabled="false"</code> and not include <code>amexMid</code> when <code>amexAcquired enabled="true"</code> .	Chapter 4 Chapters 3 and 4
2.3	Fixed miscellaneous typos. Removed all references to the <code>legalEntityPrincipalUpdatable</code> transaction type.	All Chapter 4
2.2	Changed "four Principals" to "eleven Principals" in section 3.7.	Chapter 3
2.1	Added Notes specifying that you must designate the controlling Principal when creating a Legal Entity, and also that you must create additional Principals for owners with a 10% or greater interest in the Legal Entity.	Chapters 3 and 4
2.0	Update for V13.0 of schema, which changes the namespace, as well as the Content-Type and Accept information in the HTTPS headers.	Chapters 1, 3, and 4
1.37	Replace <code>LittleXML</code> with <code>cnpAPI</code> .	All
1.36	Create Sub-merchant examples were missing closing tag for <code></submerchantFunding></code>	Chapter 3
1.35	Added Note to <code>title</code> element - required if using AmEx Opt Blue.	Chapter 4
1.34	Changed response message for Test #10. Added Tests #2a and #2b Added Create Sub-merchant examples for DP and MP. Changed <code>url</code> element from required to optional. Update for V12.1, including new elements for MCC 9311.	Chapter 2 Chapter 2 Chapter 3 Chapter 4 Chapters 3 & 4
1.33	Fixed Create and Update Legal Entity examples, as well as Legal Entity Retrieval example. All errors associated with the <code>yearsInBusiness</code> element.	Chapter 3
1.32	Fixed miscellaneous typos in examples and definitions.	Chapters 3 & 4

TABLE 1 Document Revision History

Doc. Version	Description	Location(s)
1.31	Fixed error in the structure of <legalEntityResponse>. Fixed error in the definition of <merchantIdentString>. It was defined as Type = Long, but should have been Type = String.	Chapter 3 Chapter 4
1.30	Fixed error in legalEntityRetrievalResponse example.	Chapter 3
1.29	Fixed an error in the Notes about Required Fields section of Chapter 3.	Chapter 3
1.28	Added information and elements associated with V12 of the API. This version allows provisioning of multiple principals for a Legal Entity.	All
1.27	Corrected structure/example of createLegalEntityRequest	Chapter 3
1.26	Added element to support use of AmEx Opt Blue.	Chapters 3 & 4
1.25	Miscellaneous corrections to text and examples.	All
1.24	Added Note about the minimum wait time (two minutes) between creating a Sub-merchant and the ability for that Sub-merchant to process transactions.	Chapters 3 & 4
1.23	Clarified use/origin of fundingSubmerchantId element. Corrected errors (missing elements) in subMerchantRetrievalResponse structure and examples.	Chapter 4 Chapters 3 & 4
1.22	Removed references to Funds In/Out report Renamed Instruction-Based Dynamic Payout to Dynamic Payout and Profile-Based Dynamic Payout to Managed Payout.	All All
1.21	Added information about 2 new transaction types. Corrected LE updatable items list. Corrected an XML tag in the Update Legal Entity Response example.	Chapters 3 & 4 Chapter 2 Chapter 3
1.20	Miscellaneous updates and corrections.	Chapters 3 & 4
1.19	Updated doc for schema V11.	Chapters 3 & 4
1.18	Corrected note on use of fundingSubmerchantId element.	Chapter 4
1.17	Added text to clarify use of taxId and ssn elements.	Chapter 3 & 4
1.16	Updated doc for V10.1. Replaced Update Sub-merchant Response example. Fixed error in Update Legal Entity Request example. Fixed error in when taxId element is required. Re-branded document.	Chapters 3 & 4 Chapter 3 Chapter 3 Chapters 3 & 4 All

TABLE 1 Document Revision History

Doc. Version	Description	Location(s)
1.15	Removed all references to the legalEntityPrincipalUpdatable transaction type. This should have been removed in V1.13. Removed erroneous steps shown for testing retrieving Legal Entity Cert tests.	Chapters 1, 2, 3, and 4 Chapter 2
1.14	Updated document to reflect schema V10.0 changes. Added Canadian PayFac Cert test information.	All Chapter 2
1.13	Updated document to reflect schema V9.0 changes.	All
1.12	Removed reference to using DELETE method (to disable a Sub-merchant) from Table 1-1 Corrected definition of primaryContact element and its child elements.	Chapter 1 Chapter 4
1.11	Removed <PCI> section from one updateLegalEntity example.	Chapter 3
1.10	Updated document for schema V8.0 - Added elements to designate the Fee Profile for PayFacs that use Sub-merchant Funding feature.	Chapter 4
1.9	Updated document for schema V7.0 - Removed PCI element and children; added eCheck element.	Chapters 3 & 4
1.8	Added Note/text to hardCodedBillingDescriptor and amount element definition to provide additional details. Also, fixed missing cross-reference for purchaseCurrency from subMerchantretrievalResponse.	Chapter 4.
1.7	Updated for Schema Version 6.0	Chapters 2, 3 and 4
1.6	Changed Flow charts in section 1.1. Minor corrections in various locations.	Chapter 1 All
1.5	Updated document to reflect Version 5 of the schema.	All
1.4	Added note about error in schema - username vs. userName	Chapters 3 & 4
1.3	Book name change - Merchant Provisioner to PayFac. Added information about behavior when duplicate Create Legal Entity and Create Sub-merchant transactions are submitted. Also added information about new elements added for duplicate behavior.	All All
1.2	Added / to calls in Table 1-1 and added section/flow chart about Legal Entity processing. Fixed typos in examples.	Chapter 1 Chapter 3
1.1	Updated for schema version 3.0. Added text to clarify some points raised by merchants and fixed errors in version 1.0. Added info about new pspMerchantId element.	All

TABLE 1 Document Revision History

Doc. Version	Description	Location(s)
1.0	Initial Release of Document Note: This guide replaces the <i>PSP On-boarding API Quick Reference Guide</i> and the <i>PSP On-boarding API Certification Tests Guide</i> .	N/A

Document Structure

This manual contains the following sections:

Chapter 1, "Introduction"

This chapter provides an overview of PayFac Merchant Provisioner API functionality.

Chapter 2, "PayFac API Certification Tests"

This chapter guides you through testing and certification process required prior to using the PayFac Merchant Provisioner API in the production environment.

Chapter 3, "PayFac API Transaction Examples"

This chapter provides information concerning the required XML structure, as well as example of the available PayFac Merchant Provisioner API transaction messages.

Chapter 4, "PayFac API XML Elements"

The chapter provides definitions of each element available in the PayFac Merchant Provisioner API.

Documentation Set

Our documentation set also include the items listed below, as well as many other InfoSheets and FAQ documents. Please refer to the appropriate guide for information concerning other product offerings.

- *Worldpay PayFac™ Portal User Guide*
- *Worldpay eComm cnpAPI Reference Guide*
- *Worldpay eComm iQ Reporting and Analytics User Guide*
- *Worldpay eComm PayFac™ Integration Overview (eComm)*
- *Worldpay PayPal Integration Guide*
- *Worldpay eComm Chargeback API Reference Guide*
- *Worldpay eComm Chargeback Process Guide*
- *Worldpay eComm eProtect™ Integration Guide*
- *Worldpay Enterprise eProtect™ Integration Guide*
- *Worldpay eComm cnpAPI Differences Guide*
- *Worldpay eComm Scheduled Secure Reports Reference Guide*
- *Worldpay eComm Account Updater Implementation and Operations Guide (Legacy)*

Typographical Conventions

Table 2 describes the conventions used in this guide.

TABLE 2 Typographical Conventions

Convention	Meaning
.	Vertical ellipsis points in an example mean that information not directly related to the example has been omitted.
...	Horizontal ellipsis points in statements or commands mean that parts of the statement or command not directly related to the example have been omitted.
<>	Angle brackets are used in the following situations: <ul style="list-style-type: none"> • user-supplied values (variables) • XML elements
[]	Brackets enclose optional clauses from which you can choose one or more option.
bold text	Bold text indicates emphasis.
<i>Italicized text</i>	Italic type in text indicates a term defined in the text, the glossary, or in both locations.
blue text	Blue text indicates a hypertext link.

Contact Information

This section provides contact information for organizations within Worldpay.

Chargebacks - For business-related issues and questions regarding financial transactions and documentation associated with chargeback cases, contact the Chargebacks Department.

Chargebacks Department Contact Information

Telephone	1-844-843-6111 (option 4)
E-mail	chargebacks@vantiv.com
Hours Available	Monday – Friday, 7:30 A.M.– 5:00 P.M. EST

Technical Support - For technical issues such as file transmission errors, email Technical Support. A Technical Support Representative will contact you within 15 minutes to resolve the problem.

Technical Support Contact Information

Telephone	For critical production issues only: 1-888-829-1907
E-mail	ecommercesupport@worldpay.com
Hours Available	24/7 (seven days a week, 24 hours a day)

Relationship Management/Customer Service - For non-technical issues, including questions concerning iQ Reporting and Analytics, help with passwords, modifying merchant details, and changes to user account permissions, contact the Relationship Management/Customer Service Department. If you are a Payment Facilitator, refer to the second table.

Relationship Management/Customer Service Contact Information - Merchants

Telephone	1-844-843-6111 (Option 3)
E-mail	ecomcustomer@worldpay.com
Hours Available	Monday – Friday, 8:00 A.M.– 6:00 P.M. EST

Relationship Management/Customer Service Contact Information - Payment Facilitators

Telephone	1-844-843-6111 (Option 5)
E-mail	PayFacEComm@worldpay.com
Hours Available	Monday – Friday, 8:00 A.M.– 5:00 P.M. EST

Technical Publications - For questions or comments about this document, please address your feedback to the Technical Publications Department. All comments are welcome.

Technical Publications Contact Information


E-mail	TechPubs@fisglobal.com
---------------	--------------------------------------------------------------------

Introduction

This document provides an overview of the PayFac API. This is an XML based, RESTful API that allows you to create and update Legal Entities and Sub-merchants, as well as retrieve information about existing Legal Entities and Sub-merchants in near real-time. Additionally, you can disable Sub-merchants should the need arise.

As shown in [Figure 1-1](#), before you can begin processing payment transactions for a Sub-merchant, you must first create the Legal Entity. A Legal Entity describes the parent of one or more Sub-merchants. After the successful creation of a Legal Entity, you create Sub-merchants under that Legal Entity.

FIGURE 1-1 Legal Entity and Sub-merchant Creation Flow

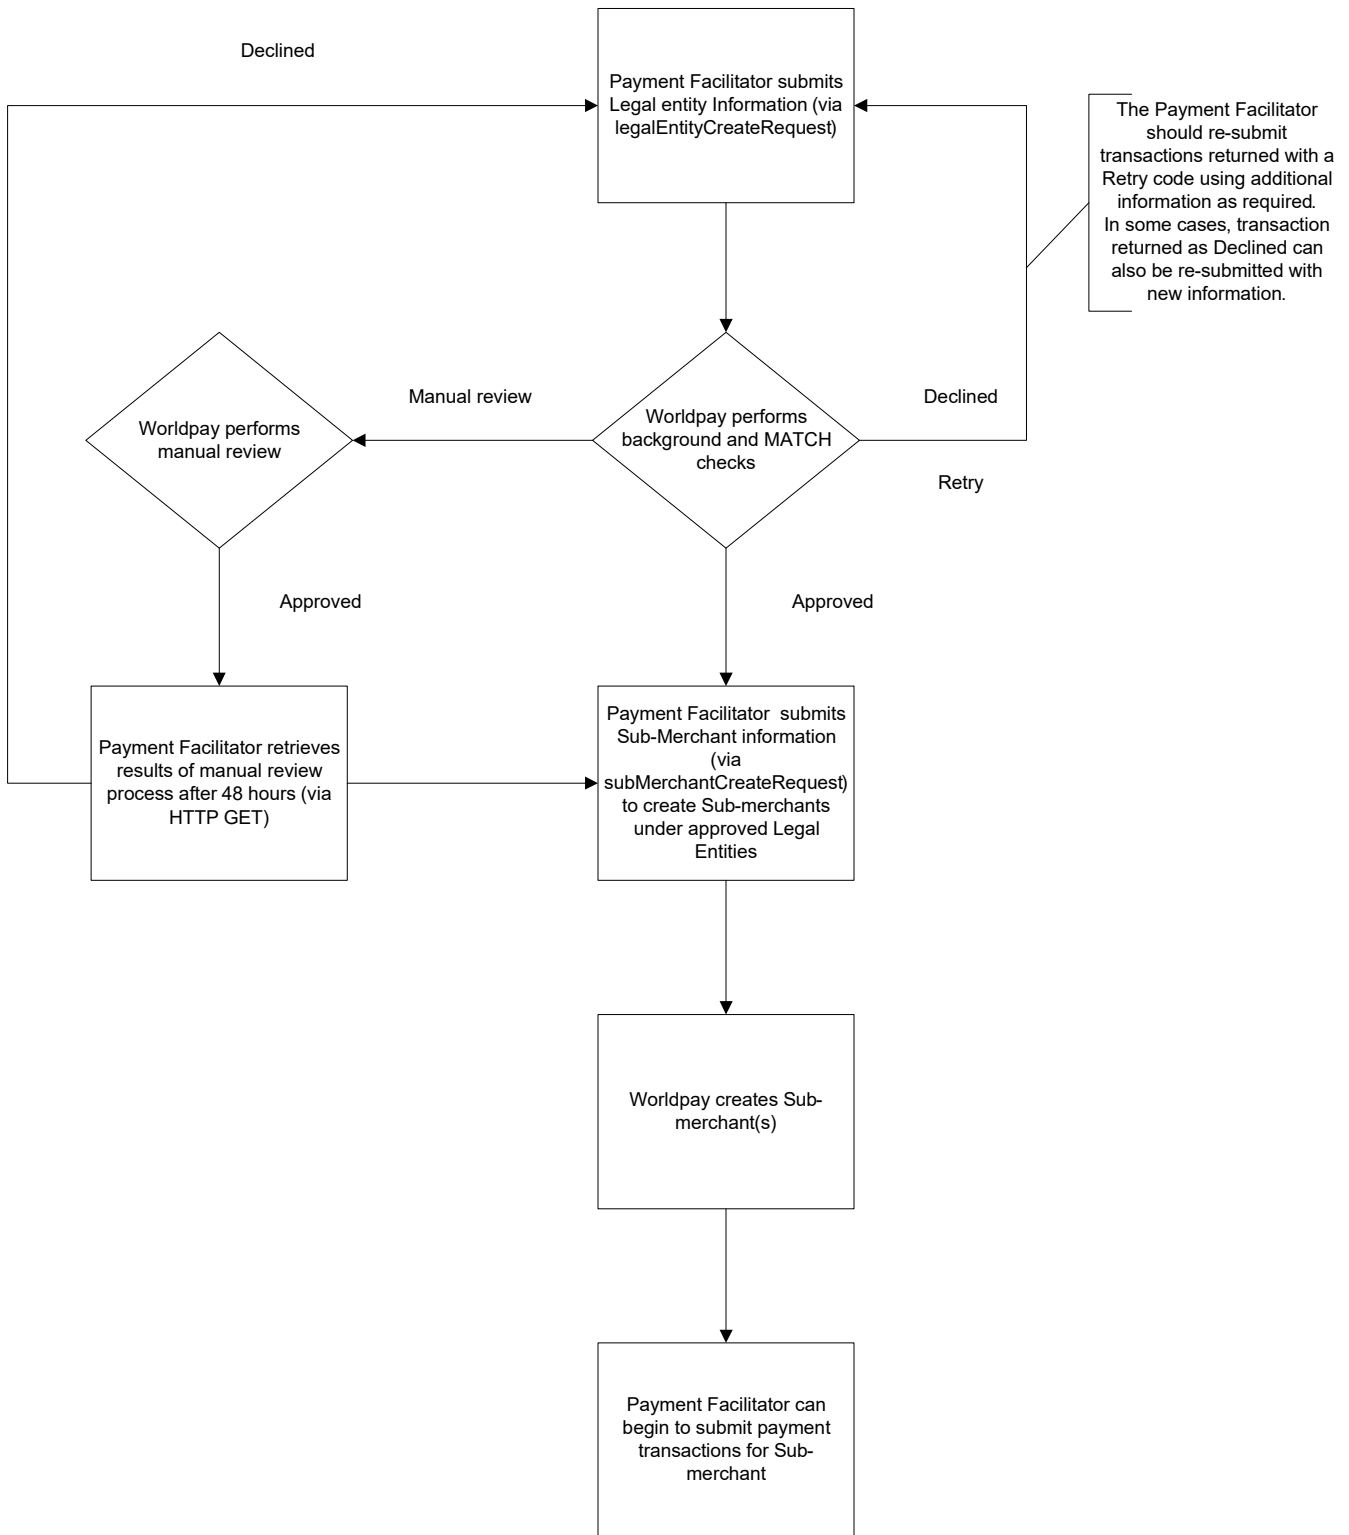

1.1 Legal Entity Processing

When you use the PayFac API to create a Legal Entity, add a Principal to a Legal Entity, and/or create a Sub-merchant, the system performs a series of background checks. The extent and type of check performed depend upon your needs and contract. There are three levels of service available: Basic, Premium, and Premium Plus.

As illustrated in [Figure 1-2](#) and [Figure 1-3](#), depending upon your service level, the result of the background checks, and subsequent analysis if necessary, there are three possible outcomes: Accept, Decline, or Soft Decline/Retry

FIGURE 1-2 Legal Entity Acceptance Flow - Basic and Premium


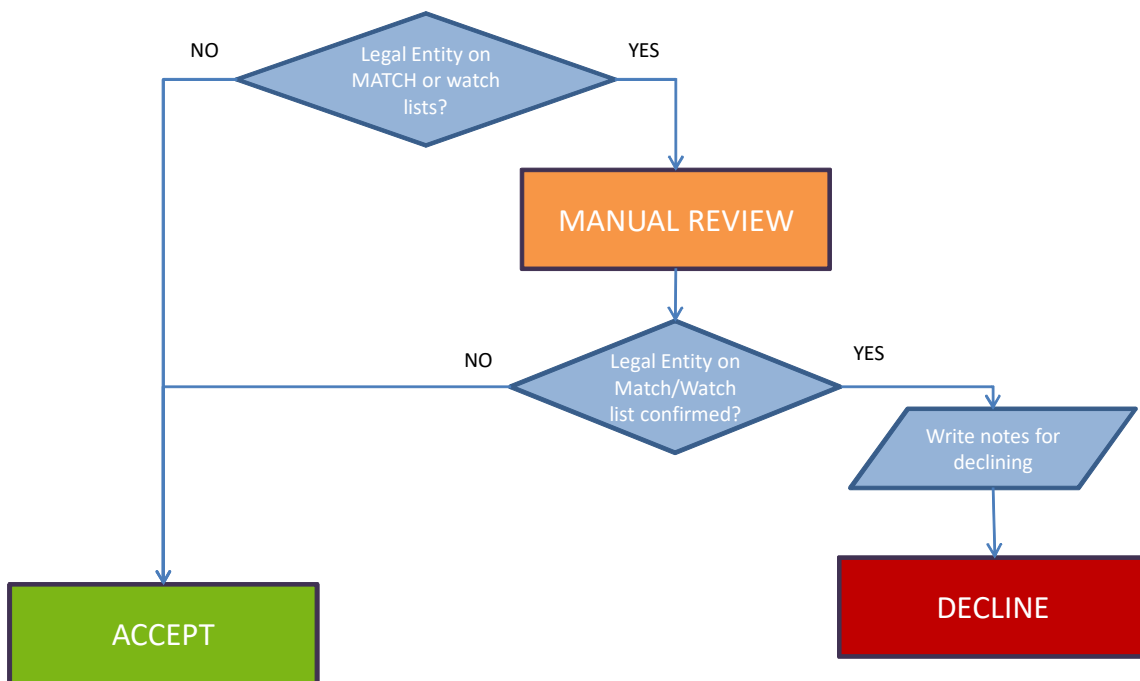


FIGURE 1-3 Legal Entity Acceptance Flow - Premium Plus

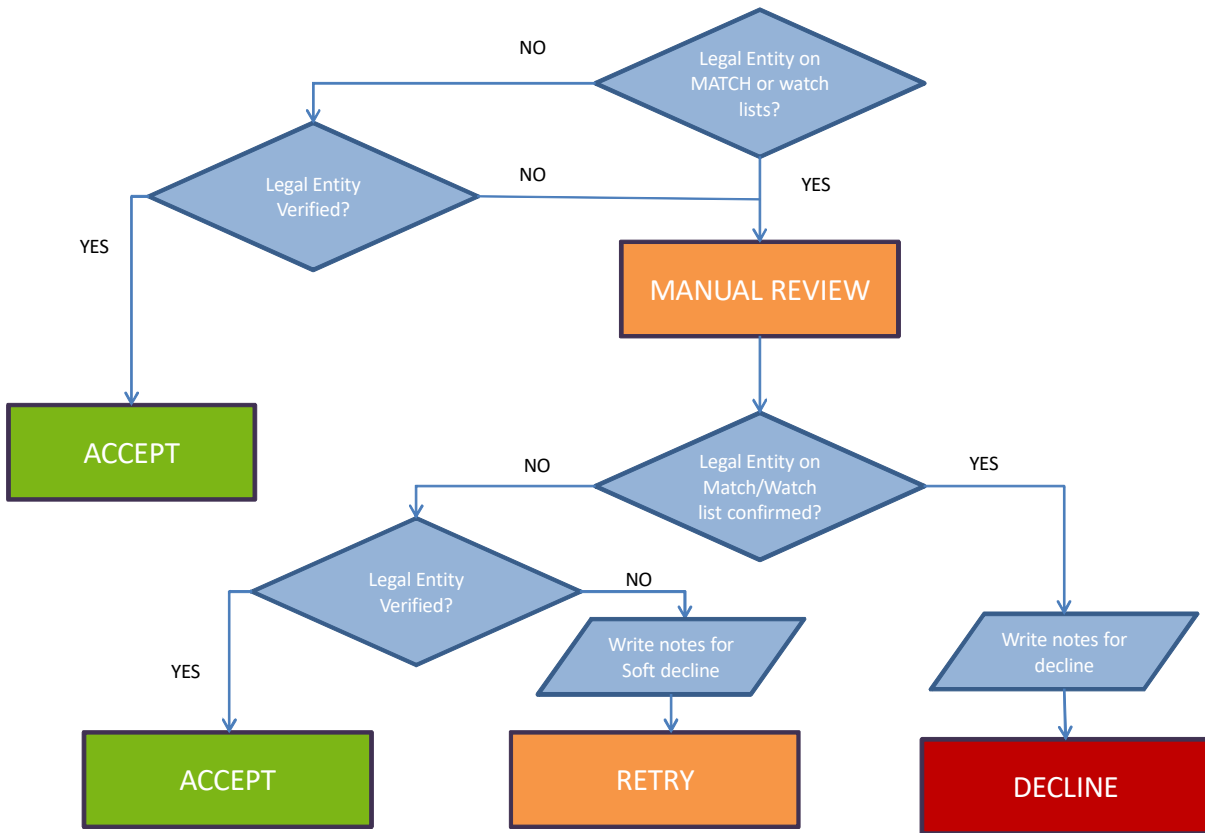

1.2 API Summary

You use the following methods to create, retrieve, update, or disable Sub-merchants, as well as list Merchant Category Codes (MCC). The associated data is submitted in various XML messages, the structure of which is defined in the other sections of this document.

NOTE: When creating a URI for a particular method, replace any Id object with the value returned in the create response XML message. For example, if you were updating a Legal Entity and the **legalEntityId** = 3 (from the **legalEntityCreateResponse** message), the update call would be: PUT /legalentity/3

TABLE 1-1 API Methods Summary (replace **bold** items with values)

Resource	Description
POST /legalentity/ legalEntityId /agreement	Request to designate the version of the agreement along with information about the agreeing party. (See Create Legal Entity Agreement on page 26)
GET /legalentity/ legalEntityId /agreement	Request to retrieve all agreements associated with a specified Legal Entity. (See Legal Entity Agreement Retrieval Request on page 28)
POST /legalentity	Request to create a new Legal Entity. (See Create Legal Entity on page 31)
PUT /legalentity/ legalEntityId	Request to update data associated with the designated Legal Entity. (See Update Legal Entity on page 38)
GET /legalentity/ legalEntityId	Request for information and/or status of the designated Legal Entity. Typically this is use to check status of a Legal Entity in Manual Review. (See Retrieve Legal Entity on page 44)
POST /legalentity/ legalEntityId /principal	Request to create a new Principal associated with a Legal Entity. (See Create a Principal on page 49)
DELETE /legalentity/ legalEntityId /principal/ principalId	Request to delete a Principal associated with a Legal Entity. (See Delete a Principal on page 52)
POST /legalentity/ legalEntityId /submerchant	Request to create a Sub-merchant associated with the designated Legal Entity. (See Create Sub-Merchant on page 54)
PUT /legalentity/ legalEntityId /submerchant/ subMerchantId	Request to update data associated with the designated Sub-merchant. (See Update Sub-Merchant on page 61)
GET /legalentity/ legalEntityId /submerchant/ subMerchantId	Request to retrieve information about the designated Sub-merchant. (See Retrieve Sub-Merchant on page 64)

TABLE 1-1 API Methods Summary (replace **bold** items with values)

Resource	Description
GET /mcc	Returns the list of merchant category codes that are currently approved for the Payment Service Provider. (See Retrieve Allowed MCC List on page 68)

1.3 Header Information

To authenticate, you will need a merchant ID (merchant identity), username and password. We uses an HTTP Basic Authentication scheme in combination with SSL to guarantee the protection of your authentication information. You must include your username and password in the HTTP header according to the HTTP Basic Authentication (i.e. base-64 encoding) on every API method invocation. The tables below contains additional information concerning the header.

TABLE 1-2 HTTP Request Header

Authorization	Basic (with user name and password)
Content-Type	application/com.vantivcnp.payfac-v13+xml
Accept	application/com.vantivcnp.payfac-v13+xml

NOTE: The Content-Type and Accept may not be required for all methods. When included, the version number in Content-Type and Accept should always reflect the API version you use. For example, if you use API V14, use application/com.vantivcnp.payfac-v14+xml for Content-Type and Accept.

TABLE 1-3 Header Information

Description	Example/Info	Comments
Authorization	username:password = merchant1:password Base-64 encoded = bWVvY2hhbnQxOnBhc3N3b3Jk	Required for authentication purpose.

Example: HTTP Header Example - Create Sub-merchant

```
POST /legalentity/1/submerchant
Host: example_only.vantiv.com
Authorization: Basic bWVvY2hhbnQxOnBhc3N3b3Jk=
Content-Type: application/com.vantivcnp.payfac-v13+xml
Accept: application/com.vantivcnp.payfac-v13+xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
.
.
.
```

PayFac API Certification Tests

You must complete a number of certification tests prior to submitting transactions to the Merchant Provisioning system. This testing process allows you to verify that your system not only submits correctly formatted transaction data, but also correctly parses the data returned to you in the response messages. To facilitate the certification process, we have established a certification environment that simulates the production environment.

During certification testing, an Implementation Consultant will guide you through each required test scenario. For each transaction type, specific data is supplied that you must use in your transactions. Use of this data allows the validation of your transaction structure/syntax, as well as the return of a response file containing known data. Please refer to [Chapter 4, "PayFac API XML Elements"](#) for element definitions and XML message structure.

NOTE: The test data supplied does not account for all data fields/xml elements in a particular request. Where we do not supply data, you should provide appropriate information. You should never override your own system to enter supplied data. If you cannot enter the supplied data without overriding your system, please consult your Implementation Consultant concerning the test and how to proceed.

2.1 Testing Legal Entity Transactions

The following sections provide information used to test the creation and updating of Legal Entities, as well as the retrieval of information for already existing Legal Entities.

2.1.1 Creating Legal Entities

NOTE: For Canadian Legal Entity tests see section [Creating Canadian Legal Entities](#) on page 11.

You must create a Legal entity prior to creating Sub-merchants. Each Legal entity can have one or more associated Sub-Merchants.

To test the creation of Legal Entities:

1. Verify that your Create Legal Entity template is coded correctly (see [Create Legal Entity](#) on page 31).
2. Submit `legalEntityCreateRequest` transaction using the data provided for Test # 1, 2, and 3. You must provide the data for all other required elements (see [Notes About Required Fields](#) on page 31). The response of the simulator for these test cases is tied to the contents of the `streetAddress1` element.
3. Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.
4. Wait a minimum of two hours after submitting Test #2 and submit a Legal Entity Retrieval (see [Retrieve Legal Entity](#) on page 44), using the `legalEntityId` returned in Test #2.
5. Follow the instructions returned in the Retrieval response and submit an Update Legal Entity request. Verify the approval of the Legal Entity.

TABLE 2-1 Create Legal Entity Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
1	<legalEntityType>	INDIVIDUAL_SOLE_PROPRIETORSHIP	HTTP Status Code:	201
	<streetAddress1>	900 Chelmsford St Note: For this legalEntityType you must include the <code>ssn</code> element.	XML Response:	
			<responseCode>	10
			<responseDescription>	Approved

TABLE 2-1 Create Legal Entity Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
2	<legalEntityType> <streetAddress1>	INDIVIDUAL_SOLE_PROPRIETORSHIP 912 Chelmsford St Note: For this legalEntityType you must include the ssn element.	HTTP Status Code: XML Response: <responseCode> <responseDescription>	201 20 Manual Review
2a	legalEntityId	Value from in Test #2.	<backgroundCheckDecisionNotes>	Notes for resubmission.
2b	legalEntityId	Value from in Test #2.	HTTP Status Code: XML Response: <responseCode> <responseDescription>	201 10 Approved
3	<legalEntityType> <streetAddress1>	LIMITED_LIABILITY_COMPANY 914 Chelmsford St Note: For this legalEntityType you must include the taxId element.	HTTP Status Code: XML Response: <responseCode> <responseDescription>	201 10 Approved

2.1.2 Creating Canadian Legal Entities

To test the creation of Legal Entities for Canada:

- Verify that your Create Legal Entity template is coded correctly (see [Create Legal Entity](#) on page 31).
- Submit legalEntityCreateRequest transaction using the data provided for Test # C.1.1, C.1.2, and C.1.3. You must provide the data for all other required elements (see [Notes About Required Fields](#) on page 31). The response of the simulator for these test cases is tied to the contents of the streetAddress1 element.
- Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.

TABLE 2-2 Create Canadian Legal Entity Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
C.1.1	<legalEntityType> <doingBusinessAs> <streetAdress1>	CORPORATION Canada Cert Test Legal Entity A 900 Chelmsford St	HTTP Status Code: XML Response: <responseCode> <responseDescription>	201 10 Approved
C.1.2	<legalEntityType> <streetAdress1>	INDIVIDUAL_SOLE_ PROPRIETORSHIP 900 Chelmsford St Note: For this legalEntityType you must include the ssn element.	HTTP Status Code: XML Response: <responseCode> <responseDescription>	201 10 Approved
C.1.3	<legalEntityType> <streetAdress1>	GENERAL_PARTNE RSHIP 912 Chelmsford St Note: For this legalEntityType you must include the taxId element.	HTTP Status Code: XML Response: <responseCode> <responseDescription>	201 20 Manual Review

2.1.3 Updating Legal Entities

NOTE: For Canadian Legal Entity updating tests see section [Updating Canadian Legal Entities](#) on page 13.

You can update the several items associated with a Legal Entity. To update information associated with a Legal Entity, you use a PUT method with the appropriate `legalEntityId` along with a `legalEntityUpdateRequest` message containing the updated information.

You can update the following items:

- `streetAddress1` (entity and/or principal)
- `streetAddress2` (entity and/or principal)
- `city` (entity and/or principal)
- `firstName` (principal)
- `lastName` (principal)
- `ssn` (principal)

- stateProvince (entity and/or principal)
- postalCode (entity and/or principal)
- doingBusinessAs
- annualCreditCardSalesVolume
- hasAcceptedCreditCards
- contactPhone (entity and/or principal)
- title (principal)
- emailAddress (principal)
- dateOfBirth (principal)
- driversLicense (principal)
- driversLicenseState (principal)
- legalEntityName
- legalEntityType
- taxId
- yearsInBusiness

To test the `legalEntityUpdateRequest` transaction:

1. Verify that your Update Legal Entity template is coded correctly (see [Update Legal Entity](#) on page 38).
2. Submit `legalEntityUpdateRequest` transaction using the data provided for Test # 4 and 5. You must provide the data for all other required elements.
3. Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.

TABLE 2-3 Update Legal Entity Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
4	legalEntityId	Use the value returned in the response message from Test #1.	HTTP Status Code:	200
5	legalEntityId	Submit any invalid value	HTTP Status Code: XML Response:	400 <error> Error in request: Could not find requested object.

2.1.4 Updating Canadian Legal Entities

To test the `legalEntityUpdateRequest` transaction:

1. Verify that your Update Legal Entity template is coded correctly (see [Update Legal Entity](#) on page 38).
2. Submit `legalEntityUpdateRequest` transaction using the data provided in [Table 2-4](#). You must provide the data for all other required elements.
3. Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.

TABLE 2-4 Update Canadian Legal Entity Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
C2.2.1	legalEntityId <doingBusinessAs>	Use the value returned in the response message from Test #C.1.1. Canada A	HTTP Status Code:	200
C2.2.2	legalEntityId <principal> <address> <stateProvince>	Use the value returned in the response message from Test #C.1.1. XX	HTTP Status Code: XML Response: <error>	400 Legal Entity Principal stateProvince: "XX" is not valid for Legal Entity Principal country.
C2.2.3	legalEntityId <address> <postalCode>	Use the value returned in the response message from Test #C.1.1. 01730	HTTP Status Code: XML Response: <error>	400 Postal Code is not valid for country "CAN".
C2.2.4	legalEntityId <principal> <address> <postalCode>	Use the value returned in the response message from Test #C.1.3. 01730	HTTP Status Code: XML Response: <error>	400 Postal Code "01730" is not valid for country "CAN".
C2.2.5	legalEntityId <doingBusinessAs>	Use the value returned in the response message from Test #C.1.1. Canada Cert Test C - Update	HTTP Status Code: XML Response: <error>	200 Due to its current status, requested Legal Entity is not updatable

TABLE 2-4 Update Canadian Legal Entity Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
C2.2.6	legalEntityId <backgroundCheckFields> <taxId>	Use the value returned in the response message from Test #C.1.1. 123456789	HTTP Status Code: XML Response: <error>	400 Background check fields cannot be updated after background check.

2.1.5 Retrieving Legal Entity Information

NOTE: For Canadian Legal Entity retrieving tests see section [Retrieving Legal Entity Information](#) on page 15.

If you need to retrieve the on-boarding information related to a Legal Entity for verification purposes or to check the status of cases requiring manual intervention, you must perform a GET operation specifying the legalEntityId.

To test the retrieval of Legal Entity information use the information supplied in [Table 2-5](#).

Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.

TABLE 2-5 Retrieve Legal Entity Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
6	legalEntityId	Use the value returned in the response message from Test #2.	HTTP Status Code: XML Response: <responseCode> <responseDescription>	200 20 Manual Review Note: Response message will include other Legal Entity information submitted with Test #2.

2.2 Testing Sub-Merchant Transactions

The following sections provide information used to test the creation and updating of Sub-merchants, as well as the retrieval of information for already existing Sub-merchants.

2.2.1 Creating Sub-Merchants

NOTE: For Canadian Sub-merchant creation tests see section [Creating Canadian Sub-merchants](#) on page 18.

After creating a Legal Entity, you can create one or more Sub-merchants associated with the Legal Entity. Create transactions that succeed return a `subMerchantCreateResponse` message, while transactions that fail return an `errorResponse` message.

To test the creation of Sub-merchants:

1. Verify that your Create Sub-merchant template is coded correctly (see [Create Sub-Merchant](#) on page 54).
2. Submit `subMerchantCreateRequest` transaction using the data provided for Test # 8, 9, and 10. You must provide the data for all other required elements.
3. Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.

TABLE 2-7 Create Sub-merchant Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
8	legalEntityId	Use the value returned in the response message from Test #1.	HTTP Status Code:	201
9	legalEntityId	Submit any invalid value	HTTP Status Code: XML Response: <error>	400 Error in request: Could not find requested object.

TABLE 2-7 Create Sub-merchant Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
10	legalEntityId	Use the value returned in the response message from Test #2.	HTTP Status Code: XML Response: <error>	400 Error in request: Legal entity [legalEntityName] is in inactive state. You cannot add/update a submerchant.

2.2.2 Creating Canadian Sub-merchants

To test the creation of Canadian Sub-merchants:

1. Verify that your Create Sub-merchant template is coded correctly (see [Create Sub-Merchant](#) on page 54).
2. Submit `subMerchantCreateRequest` transaction using the data provided in [Table 2-8](#). You must provide the data for all other required elements.
3. Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.

TABLE 2-8 Create Canadian Sub-merchant Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
C.4.1	legalEntityId	Use the value returned in the response message from Test #C.1.1.	HTTP Status Code:	201
C.4.2	legalEntityId <purchaseCurrency> <settlementCurrency>	Use the value returned in the response message from Test #C.1.1. USD CAD	HTTP Status Code: XML Response: <error>	400 Error in request: No processing group defined with purchaseCurrencyCode <840> and settlementCurrencyCode <124>

TABLE 2-8 Create Canadian Sub-merchant Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
C.4.3	legalEntityId <address> <countryCode>	Use the value returned in the response message from Test #C.1.1. USA	HTTP Status Code: XML Response: <error>	400 Error in request: Submerchant country code "USA" does not match Legal Entity country code "CAN"
C.4.4	legalEntityId	Use the value returned in the response message from Test #C.1.3.	HTTP Status Code: XML Response: <error>	400 Error in request: Legal Entity "Legal Entity Name" has not been approved
C.4.5	legalEntityId <address> <postalCode>	Use the value returned in the response message from Test #C.1.1. 01970	HTTP Status Code: XML Response: <error>	400 Postal Code "01970" is not valid for country "CAN".

2.2.3 Updating Sub-Merchant information

NOTE: For Canadian Sub-merchant update tests see section [Updating Canadian Sub-Merchant Information](#) on page 20.

You can update the several items associated with a Sub-Merchant. To update information associated with a Sub-merchant, you use a PUT method with the appropriate `legalEntityId`, `subMerchantId`, and a `subMerchantUpdatable` message containing the information to be updated.

You can update the following items:

- url
- customerServiceNumber
- streetAddress1
- streetAddress2

- hardCodedBillingDescriptor
- maxTransactionAmount
- bankRoutingNumber
- bankAccountNumber
- city
- stateProvince
- postalCode

To test the `subMerchantUpdatable` transaction:

1. Verify that your Update Sub-Merchant template is coded correctly (see [Update Sub-Merchant](#) on page 61).
2. Submit `subMerchantUpdatable` transaction using the data provided for Test # 11, 12, and 13. You must to provide the data for all other required elements.
3. Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.

TABLE 2-9 Update Sub-merchant Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
11	legalEntityId	Use the value returned in the response message from Test # 1.	HTTP Status Code:	200
	subMerchantId	Use the value returned in the response message from Test # 8.		
12	legalEntityId	Submit any invalid value	HTTP Status Code:	400
	subMerchantId	Submit any valid or invalid value.		
13	legalEntityId	Use the value returned in the response message from Test #1.	HTTP Status Code:	400
	subMerchantId	Submit any invalid value.		

2.2.4 Updating Canadian Sub-Merchant Information

To test the `subMerchantUpdatable` transaction:

1. Verify that your Update Sub-Merchant template is coded correctly (see [Update Sub-Merchant](#) on page 61).
2. Submit `subMerchantUpdatable` transaction using the data provided in [Table 2-10](#). You must provide the data for all other required elements.
3. Verify that your system parses the response file correctly and that the value are those shown in the Key Response Elements of the table.

TABLE 2-10 Update Canadian Sub-merchant Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
C.5.1	legalEntityId	Use the value returned in the response message from Test # C.1.1.	HTTP Status Code:	200
	subMerchantId	Use the value returned in the response message from Test # C.4.1.		
C.5.2	legalEntityId	Submit any invalid value	HTTP Status Code:	400
	subMerchantId	Submit any valid or invalid value.	XML Response: <error>	Error in request: Could not find requested object.
C.5.3	legalEntityId	Use the value returned in the response message from Test #C.1.1.	HTTP Status Code:	400
	subMerchantId	Submit any invalid value.	XML Response: <error>	Error in request: Could not find requested object.

2.2.5 Retrieving Sub-Merchant Information

If you need to retrieve the on-boarding information related to a Sub-merchant for verification purposes, you must perform a GET operation specifying the `legalEntityId` and `subMerchantId`.

To test the retrieval of Sub-merchant information use the information supplied in [Table 2-11](#).

TABLE 2-11 Retrieve Sub-merchant Information Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
14	<code>legalEntityId</code>	Use the value returned in the response message from Test # 1.	HTTP Status Code:	200
	<code>subMerchantId</code>	Use the value returned in the response message from Test # 8.		
15	<code>legalEntityId</code>	Submit any invalid value	HTTP Status Code:	400
	<code>subMerchantId</code>	Submit any valid or invalid value.		
16	<code>legalEntityId</code>	Use the value returned in the response message from Test #1.	HTTP Status Code:	400
	<code>subMerchantId</code>	Submit any invalid value.		

2.2.6 Retrieving Canadian Sub-Merchant Information

To test the retrieval of Canadian Sub-merchant information use the information supplied in [Table 2-12](#).

TABLE 2-12 Retrieve Canadian Sub-merchant Information Test Data

Test #	Supplied Data Elements		Key Response Elements	
	Element	Value	Element	Value
14	legalEntityId	Use the value returned in the response message from Test # C.1.1.	HTTP Status Code:	200
	subMerchantId	Use the value returned in the response message from Test # C.4.1.		

2.2.7 Retrieve Allowed MCC List

When on-boarding a new Sub-merchant, a Payment Service Provider should only use one of the approved MCCs. To retrieve the allowed MCC list perform a GET operation with the parameter `mcc` (GET/`mcc`).

Verify that you correctly parse the list returned. Please refer to [Retrieve MCC List Response](#) on page 68 for an example of the structure of the response message.

PayFac API Transaction Examples

This chapter contains examples showing the message structure used by the PayFac Merchant Provisioner API. For each message type, the chapter provides a high level overview of the message structure followed by one or more examples of request and response messages. Examples of Error messages are also provided. The following message types are discussed:

- [Create Legal Entity Agreement](#)
- [Legal Entity Agreement Retrieval Request](#)
- [Create Legal Entity](#)
- [Update Legal Entity](#)
- [Retrieve Legal Entity](#)
- [Create a Principal](#)
- [Delete a Principal](#)
- [Create Sub-Merchant](#)
- [Update Sub-Merchant](#)
- [Retrieve Sub-Merchant](#)
- [Retrieve Allowed MCC List](#)
- [Status Codes and Error Messages](#)

NOTE: Each high-level structural example shows the message parent element and its children (one element down). The parent and each child element links to the element definition page in Chapter 4. Where there is additional structure under the child element, the element definition page includes structural examples.

3.1 Create Legal Entity Agreement

You use the Create Legal Entity Agreement request transaction to designate the version of the agreement along with information about the agreeing party. You should use this transaction type only if your PayFac Account Manager directs you to do so.

To create a Legal Entity Agreement use an HTTP POST method to submit the legalEntityAgreementCreateRequest message.

TABLE 3-1 Resource Information

HTTP Method	POST
Call	/legalentity/legalEntityId/agreement
Request Format	XML
Response Format	XML
Rate Limited	No

TABLE 3-2 POST Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the Legal Entity

3.1.1 Create Legal Entity Agreement Request Message

You must structure a Create Legal Entity Agreement request as shown in the following examples.

```
<legalEntityAgreementCreateRequest>
  <legalEntityAgreement>
    <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
    <agreementVersion>Agreement Version Number</agreementVersion>
    <userFullName>Full Name of Signer</userFullName>
    <userSystemName>User Name of Signer of PayFac System</userSystemName>
    <userIPAddress>IP Address of Signer's system</userIPAddress>
    <manuallyEntered>>true or false</manuallyEntered>
    <acceptanceDateTime>Date and Time Agreement Signed</acceptanceDateTime>
  </legalEntityAgreement>
</legalEntityAgreementCreateRequest>
```

Example: Create Legal Entity Agreement Request

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
```

```

<legalEntityAgreementCreateRequest
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
<legalEntityAgreement>
  <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
  <agreementVersion>agreementVersion1</agreementVersion>
  <userFullName>userFullName</userFullName>
  <userSystemName>systemUserName</userSystemName>
  <userIPAddress>196.198.100.100</userIPAddress>
  <manuallyEntered>>false</manuallyEntered>
  <acceptanceDateTime>2017-02-11T12:00:00-06:00</acceptanceDateTime>
</legalEntityAgreement>
</legalEntityAgreementCreateRequest>

```

NOTE: If the value for the `<manuallyEntered>` element is false, you must include the `<userIPAddress>` element. If the value for the `<manuallyEntered>` element is true, you can omit the `<userIPAddress>` element.

3.1.2 Create Legal Entity Agreement Response Message

The structure for the response to a Create Legal Entity Agreement request has the following structure.

```

<legalEntityAgreementCreateResponse>
  <transactionId>1234567890123456789</transactionId>
</legalEntityAgreementCreateResponse>

```

NOTE: If the create request is a duplicate, the response message includes a `duplicate="true"` attribute.

If the request fails, the system returns an error response. See [Status Codes and Error Messages](#) on page 69.

3.2 Legal Entity Agreement Retrieval Request

You use the Legal Entity Agreement Retrieval request to retrieve all agreements associated with a specified Legal Entity.

To retrieve all agreements associated with a Legal Entity use an HTTP GET method to submit the legalEntityAgreementCreateRequest message.

TABLE 3-3 Resource Information

HTTP Method	GET
Call	/legalentity/legalEntityId/agreement
Request Format	XML
Response Format	XML
Rate Limited	No

TABLE 3-4 GET Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the Legal Entity

3.2.1 Legal Entity Agreement Retrieval Response

The structure of the response message is as follows:

NOTE: If there are more than one agreements associated with the Legal Entity, the Retrieval Response message will have an **agreements** element containing a **legalEntityArgeement** child for each agreement.

```
<legalEntityAgreementRetrievalResponse>
  <agreements>
    <legalEntityAgreement>
      <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
      <agreementVersion>Agreement Version Number</agreementVersion>
      <userFullName>Full Name of Signer</userFullName>
      <userSystemName>User Name of Signer of PayFac System</userSystemName>
      <userIPAddress>IP Address of Signer's system</userIPAddress>
      <manuallyEntered>>true or false</manuallyEntered>
      <acceptanceDateTime>Date and Time Agreement Signed</acceptanceDateTime>
    </legalEntityAgreement>
  </agreements>
</legalEntityAgreementRetrievalResponse>
```

```

    </legalEntityAgreement>
  </agreements>
</legalEntityAgreementRetrievalResponse>

```

Example: Legal Entity Agreement Response (no agreements)

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<legalEntityAgreementRetrievalResponse
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <legalEntityId>82826972905308177</legalEntityId>
  <transactionId>82826972904898673</transactionId>
  <agreements/>
</legalEntityAgreementRetrievalResponse>

```

Example: Legal Entity Agreement Response (with agreements)

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<legalEntityAgreementRetrievalResponse
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <legalEntityId>82826972905308177</legalEntityId>
  <transactionId>46226972904898673</transactionId>
  <agreements>
    <legalEntityAgreement>
      <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
      <agreementVersion>agreementVersion1</agreementVersion>
      <userFullName>userFullName</userFullName>
      <userSystemName>systemUserName</userSystemName>
      <userIPAddress>196.198.100.100</userIPAddress>
      <manuallyEntered>>false</manuallyEntered>
      <acceptanceDateTime>2017-06-11T13:00:00-05:00</acceptanceDateTime>
    </legalEntityAgreement>
    <legalEntityAgreement>
      <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
      <agreementVersion>agreementVersion4</agreementVersion>
      <userFullName>userFullNameFour</userFullName>
      <userSystemName>systemUserNameFour</userSystemName>
      <userIPAddress>199.12.15.201</userIPAddress>
      <manuallyEntered>>false</manuallyEntered>
      <acceptanceDateTime>2017-06-24T02:59:30-05:00</acceptanceDateTime>
    </legalEntityAgreement>
    <legalEntityAgreement>
      <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
      <agreementVersion>agreementVersion3</agreementVersion>
      <userFullName>userFullNameThree</userFullName>
      <userSystemName>systemUserNameThree</userSystemName>

```

```
<userIPAddress>210.13.154.155</userIPAddress>
<manuallyEntered>>false</manuallyEntered>
<acceptanceDateTime>2017-06-23T01:59:30-05:00</acceptanceDateTime>
</legalEntityAgreement>
<legalEntityAgreement>
  <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
  <agreementVersion>agreementVersion2</agreementVersion>
  <userFullName>userFullNameTwo</userFullName>
  <userSystemName>systemUserNameTwo</userSystemName>
  <manuallyEntered>true</manuallyEntered>
  <acceptanceDateTime>2017-06-19T23:59:30-05:00</acceptanceDateTime>
</legalEntityAgreement>
</agreements>
</legalEntityAgreementRetrievalResponse>
```


3.3 Create Legal Entity

Prior to creating new Sub-merchants, a Payment Facilitator must establish the Legal Entity. The Legal Entity is the business or taxable entity (for example, corporation, or LLC) controlling the Sub-merchant within the system. You create the Legal Entity using the `legalEntityCreateRequest` message.

To create a Legal Entity use an HTTP POST method to submit the `legalEntityCreateRequest` message.

TABLE 3-5 Resource Information

HTTP Method	POST
Call	/legalentity
Request Format	XML
Response Format	XML
Rate Limited	No

3.3.1 Notes About Background Checks

As part of the Legal Entity creation process, Worldpay performs background and MasterCard MATCH checks as part of Risk Analysis and/or underwriting the Legal Entity. Depending upon the level of service configured for the Background Check operation (see [Legal Entity Processing](#) on page 3), different verification operations occur and the system returns different results in the response file.

Only when the MasterCard MATCH and/or other background checks have a positive outcome, or the Legal Entity was reviewed by a Worldpay risk analyst and approved, will you be able to register one or more Sub-merchants for the Legal Entity. You create and assign the sub-merchant through the use of the `subMerchantCreateRequest` (see [Create Sub-Merchant](#) on page 54) using the `legalEntityId` returned in the create legal entity response (see [Create Legal Entity Response Message](#) on page 34)

3.3.2 Notes About Required Fields

In order to create the Legal Entity and perform the background checks, there are a number of required fields in the `legalEntityCreateRequest` message. Please note, the required fields vary according to the `legalEntityType` designation or if you process as part of the Worldpay PayFac Assurance program.

NOTE: When creating a Legal Entity, you must define the controlling Principal of the Legal Entity. Use the `legalEntityPrincipalCreateRequest` (see [Create a Principal](#) on page 49) to add all other Principal. with a 10% or greater ownership of the Legal Entity.

The following fields are required for all Legal Entity Types:

- `legalEntityName`
- `legalEntityType`

- taxId (EIN for Canada)
- firstName (Principal)
- lastName (Principal)
- streetAddress1 (Legal Entity and Principal)
- stateProvince (Legal Entity and Principal)
- city (Legal Entity and Principal)
- postalCode (Legal Entity and Principal)
- countryCode (Legal Entity and Principal)
- annualCreditCardSalesVolume
- hasAcceptedCreditCards
- ssn (Principal)
- dateOfBirth (Principal)
- stakePercent (Principal)
- title (Principal) (Required only if using AmEx Opt Blue)
- legalEntityOwnershipType
- emailAddress (Principal) (required if processing Visa transactions)
- contactPhone (Principal) (required if processing Visa transactions)

NOTE: In addition to the required fields listed above, Worldpay recommends that you also include the business phone number of the Legal Entity and the DBA name (**doingBusinessAs** field).

If you process as part of the Worldpay PayFac Assurance program, in addition to the fields listed above, you must also include the following fields:

- title (Principal)
- yearsInBusiness (Legal Entity)
- url (Sub-merchant)

3.3.3 Create Legal Entity Request Message

You must structure a Create Legal Entity request as shown in the following examples.

```
<legalEntityCreateRequest>
  <legalEntityName>Name of Legal Entity</legalEntityName>
  <legalEntityType>Type of Legal Entity</legalEntityType>
  <legalEntityOwnershipType>PUBLIC or PRIVATE</legalEntityOwnershipType>
  <doingBusinessAs>Alternate Name</doingBusinessAs>
  <taxId>Tax Id/EIN</taxId>
  <contactPhone>Legal Entity Contact Number</contactPhone>
  <annualCreditCardSalesVolume>Annual Visa Sales</annualCreditCardSalesVolume>
```

```

<hasAcceptedCreditCards>true or false</hasAcceptedCreditCards>
<address>
  <principal>
    <yearsInBusiness>Number of Years in Business</yearsInBusiness>
  </legalEntityCreateRequest>

```

Example: Create Legal Entity Request

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<legalEntityCreateRequest
  xmlns="http://payfac.vantivcn.com/api/merchant/onboard">
  <legalEntityName>Legal Entity Name</legalEntityName>
  <legalEntityType>CORPORATION</legalEntityType>
  <legalEntityOwnershipType>PUBLIC</legalEntityOwnershipType>
  <doingBusinessAs>Alternate Business Name</doingBusinessAs>
  <taxId>12345</taxId>
  <contactPhone>7817659800</contactPhone>
  <annualCreditCardSalesVolume>80000000</annualCreditCardSalesVolume>
  <hasAcceptedCreditCards>true</hasAcceptedCreditCards>
  <address>
    <streetAddress1>Street Address 1</streetAddress1>
    <streetAddress2>Street Address 2</streetAddress2>
    <city>City</city>
    <stateProvince>MA</stateProvince>
    <postalCode>01730</postalCode>
    <countryCode>USA</countryCode>
  </address>
  <principal>
    <title>Chief Financial Officer</title>
    <firstName>p first</firstName>
    <lastName>p last</lastName>
    <emailAddress>emailAddress</emailAddress>
    <ssn>123459876</ssn>
    <contactPhone>7817659800</contactPhone>
    <dateOfBirth>1980-10-12</dateOfBirth>
    <driversLicense>892327409832</driversLicense>
    <driversLicenseState>MA</driversLicenseState>
    <address>
      <streetAddress1>p street address 1</streetAddress1>
      <streetAddress2>p street address 2</streetAddress2>
      <city>Boston</city>
      <stateProvince>MA</stateProvince>
      <postalCode>01890</postalCode>
      <countryCode>USA</countryCode>
    </address>
  </principal>
</legalEntityCreateRequest>

```

```

    <stakePercent>33</stakePercent>
  </principal>
  <yearsInBusiness>12</yearsInBusiness>
</legalEntityCreateRequest>

```

3.3.4 Create Legal Entity Response Message

The structure for the response to a Create Legal Entity message varies slightly depending upon if it is an original request, a duplicate request with all data matching (true duplicate), or a duplicate with data that does not entirely match, as well as the state of the original request, if the new request is a duplicate. The response message has the following structure with exceptions as noted:

```

<legalEntityCreateResponse duplicate="true or false">
  <transactionId>1234567890123456789</transactionId>
  <legalEntityId>ID assigned to Legal Entity</legalEntityId> (appears if first request)
  <responseCode>Response Code</responseCode>
  <responseDescription>Description of Response Code</responseDescription>
  <originalLegalEntityId>Original ID assigned to Legal Entity</originalLegalEntityId>
(appears if dupe)
  <originalLegalEntityStatus>Original Status of Legal
Entity</originalLegalEntityStatus> (appears if dupe)
  <backgroundCheckResults> (part of originalLegalEntity if present; otherwise,
at this level)
</legalEntityCreateResponse>

```

NOTE: If you receive a Response Code 30 - Retry, the decision notes will contain additional details about the information that you should provide/correct on the retry.

Example: Create Legal Entity Response - for original

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<legalEntityResponse xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <transactionId>82820200338801014</transactionId>
  <legalEntityId>8</legalEntityId>
  <responseCode>10</responseCode>
  <responseDescription>Approved</responseDescription>
  <principal>
    <principalId>1</principalId>
    <firstName>p first</firstName>
    <lastName>p last</lastName>
  </principal>
  <backgroundCheckResults>
    <business>

```

```

<verificationResult>
  <overallScore>
    <score>Overall results for Business</score>
    <description>Text Description of Score</description>
  </overallScore>
  <nameAddressTaxIdAssociation>
    <code>Name_Address_TIN_info</code>
    <description>Text Description of Code</description>
  </nameAddressTaxIdAssociation>
  <nameAddressPhoneAssociation>
    <code>Name_Address_Phone_info</code>
    <description>Text Description of Code</description>
  </nameAddressPhoneAssociation>
  <verificationIndicators>
    <nameVerified>true or false</nameVerified>
    <addressVerified>true or false</addressVerified>
    <cityVerified>true or false</cityVerified>
    <zipVerified>true or false</zipVerified>
    <phoneVerified>true or false</phoneVerified>
    <taxIdVerified>true or false</taxIdVerified>
  </verificationIndicators>
  <riskIndicators>
    <riskIndicator>
      <code>Risk Indicator Info</code>
      <description>Text Description of Code</description>
    </riskIndicator>
  </riskIndicators>
</verificationResult>
</business>
<principal>
  <verificationResult>
    <overallScore>
      <score>Overall Results for Principal</score>
      <description>Text Description of Score</description>
    </overallScore>
    <nameAddressSsnAssociation>
      <code>Name_Address_SSN_info</code>
      <description>Text Description of Code</description>
    </nameAddressSsnAssociation>
    <nameAddressPhoneAssociation>
      <code>Name_Address_Phone_info</code>
      <description>Text Description of Code</description>
    </nameAddressPhoneAssociation>
    <verificationIndicators>

```

```

    <nameVerified>true or false</nameVerified>
    <addressVerified>true or false</addressVerified>
    <phoneVerified>true or false</phoneVerified>
    <ssnVerified>true or false</ssnVerified>
    <dobVerified>true or false</dobVerified>
  </verificationIndicators>
  <riskIndicators>
    <riskIndicator>
      <code>Risk Indicator results</code>
      <description>Text Description of Code</description>
    </riskIndicator>
  </riskIndicators>
</verificationResult>
</principal>
<businessToPrincipalAssociation>
  <score>Business_To_Principal_info</score>
  <description>Text Description of Score</description>
</businessToPrincipalAssociation>
<backgroundCheckDecisionNotes>Additional Info About
Decision</backgroundCheckDecisionNotes>
<bankruptcyData>
  <bankruptcyType>Sub-category of bankruptcy</bankruptcyType>
  <bankruptcyCount>1</bankruptcyCount>
  <companyName>Company Name</companyName>
  <streetAddress1>100 Main Street</streetAddress1>
  <streetAddress2>Suite 2</streetAddress2>
  <city>Boston</city>
  <state>MA</state>
  <zip>01150</zip>
  <zip4>2202</zip4>
  <filingDate>2011-05-13</filingDate>
</bankruptcyData>
<lienResult>
  <lienType>Subtype of Lien</lienType>
  <releasedCount>2</releasedCount>
  <unreleasedCount>1</unreleasedCount>
  <companyName>Company Name</companyName>
  <streetAddress1>100 Main Street</streetAddress1>
  <streetAddress2>Suite 2</streetAddress2>
  <city>Boston</city>
  <state>MA</state>
  <zip>01150</zip>
  <zip4>2202</zip4>
  <filingDate>2011-05-13</filingDate>
</lienResult>

```

```
</backgroundCheckResults>  
</legalEntityResponse>
```

Example: Create Legal Entity Response - for duplicate

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<legalEntityCreateResponse  
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard" duplicate="true">  
  <transactionId>82821203948749101</transactionId>  
  <originalLegalEntityId>82821203948912667</originalLegalEntityId>  
  <originalLegalEntityStatus>Approved</originalLegalEntityStatus>  
</legalEntityCreateResponse>
```

NOTE: If the Legal Entity is in Manual Review the response would be identical to the above response except the **originalLegalEntityStatus** element would have a value of Manual Review.

3.4 Update Legal Entity

You can update the several items associated with a Legal Entity, including information about a Principal. To update information associated with a Legal Entity, you submit a `legalEntityUpdateRequest` message with the appropriate `legalEntityId` and the updated information.

You can update the following items:

- `streetAddress1` (entity and/or principal)
- `streetAddress2` (entity and/or principal)
- `city` (entity and/or principal)
- `stateProvince` (entity and/or principal)
- `postalCode` (entity and/or principal)
- `doingBusinessAs`
- `annualCreditCardSalesVolume`
- `hasAcceptedCreditCards`
- `contactPhone` (entity and/or principal)
- `title` (principal)
- `emailAddress` (principal)
- `firstName` (principal)
- `lastName` (principal)
- `ssn` (principal)
- `dateOfBirth` (principal)
- `driversLicense` (principal)
- `driversLicenseState` (principal)
- `legalEntityName`
- `legalEntityType`
- `taxId`
- `yearsInBusiness`

NOTE: If the Legal Entity is approved and the TIN validation status is either approved or not required, you can not update the following elements: **`legalEntityName`, `legalEntityType`, `taxId`, `firstName`, `lastName`, `ssn`, `dateOfBirth`, `driversLicense`, `driversLicenseState`.**

Prior to the TIN validation, updating any of these elements triggers a background check.

TABLE 3-6 Resource Information

HTTP Methods	PUT
Call	<code>/legalentity/legalEntityId</code>
Request Format	XML
Response Format	XML
Rate Limited	Yes

TABLE 3-7 PUT Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the Legal Entity

3.4.1 Update Legal Entity Request

You must structure an Update Legal Entity request as shown in the following examples.

```
<legalEntityUpdateRequest>
  <address>
    <contactPhone>9785551234</contactPhone>
    <doingBusinessAs>DBA Name</doingBusinessAs>
    <annualCreditCardSalesVolume>400000</annualCreditCardSalesVolume>
    <hasAcceptedCreditCards>true</hasAcceptedCreditCards>
  <principal>
    <backgroundCheckFields>
    <legalEntityOwnershipType>PUBLIC</legalEntityOwnershipType>
    <yearsInBusiness>3</yearsInBusiness>
  </legalEntityUpdateRequest>
```

Example: Update Legal Entity Request

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<legalEntityUpdateRequest
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <address>
    <streetAddress1>LE Street Address 1</streetAddress1>
    <streetAddress2>LE Street Address 2</streetAddress2>
    <city>LE City</city>
    <stateProvince>MA</stateProvince>
    <postalCode>01730</postalCode>
    <countryCode>USA</countryCode>
  </address>
  <contactPhone>9785550101</contactPhone>
  <doingBusinessAs>Other Name Co.</doingBusinessAs>
  <annualCreditCardSalesVolume>10000000</annualCreditCardSalesVolume>
  <hasAcceptedCreditCards>true</hasAcceptedCreditCards>
  <principal>
    <title>CEO</title>
    <emailAddress>jdoe@mail.net</emailAddress>
```

```

<contactPhone>9785551234</contactPhone>
<address>
  <streetAddress1>p street address 1</streetAddress1>
  <streetAddress2>p street address 2</streetAddress2>
  <city>Boston</city>
  <stateProvince>MA</stateProvince>
  <postalCode>01890</postalCode>
  <countryCode>USA</countryCode>
</address>
<backgroundCheckFields>
  <firstName>p first</firstName>
  <lastName>p last</lastName>
  <ssn>123459876</ssn>
  <dateOfBirth>1980-10-12</dateOfBirth>
  <driversLicense>892327409832</driversLicense>
  <driversLicenseState>MA</driversLicenseState>
</backgroundCheckFields>
</principal>
<backgroundCheckFields>
  <legalEntityName>Company Name</legalEntityName>
  <legalEntityType>LE Type Enum</legalEntityType>
  <taxId>123456789</taxId>
</backgroundCheckFields>
<legalEntityOwnershipType>PUBLIC</legalEntityOwnershipType>
<yearsInBusiness>10</yearsInBusiness>
</legalEntityUpdateRequest>

```

3.4.2 Update Legal Entity Response

The system replies to an Update Legal Entity request with a generic response message. The structure of the response message is as follows:

```

<legalEntityResponse>
  <transactionId>1234567890123456789</transactionId>
  <legalEntityId> (appears if first request of dupe with all matching data)
  <responseCode>
  <responseDescription>
  <backgroundCheckResults> (appears if background check triggered by update)
</legalEntityResponse>

```

Example: Update Legal Entity Response

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<legalEntityResponse xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <transactionId>82820200338801014</transactionId>
  <legalEntityId>8</legalEntityId>
  <responseCode>10</responseCode>
  <responseDescription>Approved</responseDescription>
  <principal>
    <principalId>1</principalId>
    <firstName>p first</firstName>
    <lastName>p last</lastName>
  </principal>
  <backgroundCheckResults>
    <business>
      <verificationResult>
        <overallScore>
          <score>Overall results for Business</score>
          <description>Text Description of Score</description>
        </overallScore>
        <nameAddressTaxIdAssociation>
          <code>Name_Address_TIN_info</code>
          <description>Text Description of Code</description>
        </nameAddressTaxIdAssociation>
        <nameAddressPhoneAssociation>
          <code>Name_Address_Phone_info</code>
          <description>Text Description of Code</description>
        </nameAddressPhoneAssociation>
        <verificationIndicators>
          <nameVerified>true or false</nameVerified>
          <addressVerified>true or false</addressVerified>
          <cityVerified>true or false</cityVerified>
          <zipVerified>true or false</zipVerified>
          <phoneVerified>true or false</phoneVerified>
          <taxIdVerified>true or false</taxIdVerified>
        </verificationIndicators>
        <riskIndicators>
          <riskIndicator>
            <code>Risk Indicator Info</code>
            <description>Text Description of Code</description>
          </riskIndicator>
        </riskIndicators>
      </verificationResult>
    </business>
  </principal>

```

```

<verificationResult>
  <overallScore>
    <score>Overall Results for Principal</score>
    <description>Text Description of Score</description>
  </overallScore>
  <nameAddressSsnAssociation>
    <code>Name_Address_SSN_info</code>
    <description>Text Description of Code</description>
  </nameAddressSsnAssociation>
  <nameAddressPhoneAssociation>
    <code>Name_Address_Phone_info</code>
    <description>Text Description of Code</description>
  </nameAddressPhoneAssociation>
  <verificationIndicators>
    <nameVerified>true or false</nameVerified>
    <addressVerified>true or false</addressVerified>
    <phoneVerified>true or false</phoneVerified>
    <ssnVerified>true or false</ssnVerified>
    <dobVerified>true or false</dobVerified>
  </verificationIndicators>
  <riskIndicators>
    <riskIndicator>
      <code>Risk Indicator results</code>
      <description>Text Description of Code</description>
    </riskIndicator>
  </riskIndicators>
</verificationResult>
</principal>
<businessToPrincipalAssociation>
  <score>Business_To_Principal_info</score>
  <description>Text Description of Score</description>
</businessToPrincipalAssociation>
<backgroundCheckDecisionNotes>Additional Info About
Decision</backgroundCheckDecisionNotes>
<bankruptcyData>
  <bankruptcyType>Sub-category of bankruptcy</bankruptcyType>
  <bankruptcyCount>1</bankruptcyCount>
  <companyName>Company Name</companyName>
  <streetAddress1>100 Main Street</streetAddress1>
  <streetAddress2>Suite 2</streetAddress2>
  <city>Boston</city>
  <state>MA</state>
  <zip>01150</zip>
  <zip4>2202</zip4>
  <filingDate>2011-05-13</filingDate>

```

```
</bankruptcyData>
<lienResult>
  <lienType>Subtype of Lien</lienType>
  <releasedCount>2</releasedCount>
  <unreleasedCount>1</unreleasedCount>
  <companyName>Company Name</companyName>
  <streetAddress1>100 Main Street</streetAddress1>
  <streetAddress2>Suite 2</streetAddress2>
  <city>Boston</city>
  <state>MA</state>
  <zip>01150</zip>
  <zip4>2202</zip4>
  <filingDate>2011-05-13</filingDate>
</lienResult>
</backgroundCheckResults>
</legalEntityResponse>
```

3.5 Retrieve Legal Entity

If you need to retrieve the latest information on file related to a Legal Entity for verification purposes or to check the status of cases requiring manual intervention, you must perform a GET operation specifying the `legalEntityId`. In the case of a retrieval request, the system does not require an accompanying XML message.

NOTE: Worldpay makes the final results for the manual review of Legal entity information available within 2 business days of the initial response to the create request.

TABLE 3-8 Resource Information

HTTP Methods	GET
Call	/legalentity/legalEntityId
Request Format	XML
Response Format	XML
Rate Limited	Yes

TABLE 3-9 GET Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the legalEntity

3.5.1 Retrieve Legal Entity Response

The `legalEntityRetrieveResponse` message has the following format:

```
<legalEntityRetrievalResponse overallStatus="Approved">
  <legalEntityName>Name of Legal Entity</legalEntityName>
  <legalEntityType>Type of Legal Entity</legalEntityType>
  <doingBusinessAs>Alternate Name</doingBusinessAs>
  <taxId>Tax Id/EIN</taxId>
  <contactPhone>Legal Entity Contact Number</contactPhone>
  <annualCreditCardSalesVolume>Annual Visa Sales</annualCreditCardSalesVolume>
  <hasAcceptedCreditCards>true or false</hasAcceptedCrcreditCards>
  <address>
  <principal>
  <legalEntityId>12345678901234567</legalEntityId>
```

```

<responseCode>3-digit Code</responseCode>
<responseDescription>Description of Response Code</responseDescription>
<backgroundCheckResults>
<transactionId>1234567890123456789</transactionId>
<updateDate>YYYY-MM-DDTHH:MM:SS+/-HH:MM</updateDate>
<decisionDate>YYYY-MM-DDTHH:MM:SS+/-HH:MM</decisionDate>
<tinValidationStatus>Pending</tinValidationStatus>
<sub_merchant_processing_status>true or false</sub_merchant_processing_status>
</legalEntityRetrievalResponse>

```

Example: Legal Entity Retrieval Response

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<legalEntityRetrievalResponse
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard"
  overallStatus="Approved">
  <legalEntityName>Legal Entity Name</legalEntityName>
  <legalEntityType>CORPORATION</legalEntityType>
  <doingBusinessAs>Alternate Name</doingBusinessAs>
  <taxId>X-2345</taxId>
  <contactPhone>7817659800</contactPhone>
  <annualCreditCardSalesVolume>80</annualCreditCardSalesVolume>
  <hasAcceptedCreditCards>true</hasAcceptedCreditCards>
  <address>
    <streetAddress1>12 Norton St</streetAddress1>
    <city>City</city>
    <stateProvince>NH</stateProvince>
    <postalCode>03064</postalCode>
    <countryCode>USA</countryCode>
  </address>
  <principal>
    <principalId>1</principalId>
    <title>CEO</title>
    <firstName>p first</firstName>
    <lastName>p last</lastName>
    <emailAddress>emailAddress</emailAddress>
    <ssn>XXXXX-9876</ssn>
    <contactPhone>7817659800</contactPhone>
    <dateOfBirth>1980-10-12</dateOfBirth>
    <driversLicense>XXXXXXXX-9832</driversLicense>
    <driversLicenseState>MA</driversLicenseState>
    <address>
      <streetAddress1>p street address 1</streetAddress1>

```

```

    <streetAddress2>p street address 2</streetAddress2>
    <city>Boston</city>
    <stateProvince>MA</stateProvince>
    <postalCode>01890</postalCode>
    <countryCode>USA</countryCode>
  </address>
</principal>
<legalEntityId>3</legalEntityId>
<responseCode>10</responseCode>
<responseDescription>Approved</responseDescription>
<backgroundCheckResults>
  <business>
    <verificationResult>
      <overallScores>
        <score>Overall results for Business</score>
        <description>Text Description of Score</description>
      </overallScores>
      <nameAddressTaxIdAssociation>
        <code>Name_Address_TIN_info</code>
        <description>Text Description of Code</description>
      </nameAddressTaxIdAssociation>
      <nameAddressPhoneAssociation>
        <code>Name_Address_Phone_info</code>
        <description>Text Description of Code</description>
      </nameAddressPhoneAssociation>
      <verificationIndicators>
        <nameVerified>true or false</nameVerified>
        <addressVerified>true or false</addressVerified>
        <cityVerified>true or false</cityVerified>
        <zipVerified>true or false</zipVerified>
        <phoneVerified>true or false</phoneVerified>
        <taxIdVerified>true or false</taxIdVerified>
      </verificationIndicators>
      <riskIndicators>
        <riskIndicator>
          <code>Risk Indicator Info</code>
          <description>Text Description of Code</description>
        </riskIndicator>
      </riskIndicators>
    </verificationResult>
  </business>
</principal>
  <verificationResult>
    <overallScores>

```



```

    <score>Overall Results for Principal</score>
    <description>Text Description of Score</description>
  </overallScores>
  <nameAddressSsnAssociation>
    <code>Name_Address_SSN_info</code>
    <description>Text Description of Code</description>
  </nameAddressSsnAssociation>
  <nameAddressPhoneAssociation>
    <code>Name_Address_Phone_info</code>
    <description>Text Description of Code</description>
  </nameAddressPhoneAssociation>
  <verificationIndicators>
    <nameVerified>true or false</nameVerified>
    <addressVerified>true or false</addressVerified>
    <phoneVerified>true or false</phoneVerified>
    <ssnVerified>true or false</ssnVerified>
    <dobVerified>true or false</dobVerified>
  </verificationIndicators>
  <riskIndicators>
    <riskIndicator>
      <code>Risk Indicator results</code>
      <description>Text Description of Code</description>
    </riskIndicator>
  </riskIndicators>
</verificationResult>
</principal>
<businessToPrincipalAssociation>
  <score>Business_To_Principal_info</score>
  <description>Text Description of Score</description>
</businessToPrincipalAssociation>
<backgroundCheckDecisionNotes>Additional Info About
Decision</backgroundCheckDecisionNotes>
<bankruptcyData>
  <bankruptcyType>Sub-category of bankruptcy</bankruptcyType>
  <bankruptcyCount>1</bankruptcyCount>
  <companyName>Company Name</companyName>
  <streetAddress1>100 Main Street</streetAddress1>
  <streetAddress2>Suite 2</streetAddress2>
  <city>Boston</city>
  <state>MA</state>
  <zip>01150</zip>
  <zip4>2202</zip4>
  <filingDate>2011-05-13</filingDate>
</bankruptcyData>
<lienResult>

```

```
<lienType>Subtype of Lien</lienType>
<releasedCount>2</releasedCount>
<unreleasedCount>1</unreleasedCount>
<companyName>Company Name</companyName>
<streetAddress1>100 Main Street</streetAddress1>
<streetAddress2>Suite 2</streetAddress2>
<city>Boston</city>
<state>MA</state>
<zip>01150</zip>
<zip4>2202</zip4>
<filingDate>2011-05-13</filingDate>
</lienResult>
</backgroundCheckResults>
<transactionId>82820200338801030</transactionId>
<tinValidationStatus>Status of TIN Validation</tinValidationStatus>
<sub_merchant_processing_status>true</sub_merchant_processing_status>
</legalEntityRetrievalResponse>
```

3.6 Create a Principal

When you create a Legal Entity, you also create a Principal. You must create a Principal for each person that owns 10% or more of the Legal Entity. To create additional Principals associated with the Legal Entity you use a `legalEntityPrincipalCreateRequest`.

TABLE 3-10 Resource Information

HTTP Methods	POST
Call	/legalentity/legalEntityId/principal
Request Format	XML
Response Format	XML
Rate Limited	Yes

TABLE 3-11 POST Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the Legal Entity.

NOTE: If the `legalEntityType` is `SOLE_PROPRIETORSHIP`, you cannot delete or add Principals. The only Principal allowed is the one created with the Legal Entity. Also, if you already defined multiple Principals, the system does not allow you to change the `legalEntityType` to `SOLE_PROPRIETORSHIP` until you delete all but one of the Principals.

3.6.1 Principal Create Request

You must structure an Principal Create request as shown in the following examples.

```
<legalEntityPrincipalCreateRequest>
  <principal>
</legalEntityPrincipalCreateRequest>
```

Example: Create Principal Request

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<legalEntityPrincipalCreateRequest
  xmlns="http://payfac.vantivcn.com/api/merchant/onboard">
  <principal>
    <title>Mr.</title>
    <firstName>First</firstName>
    <lastName>Last</lastName>
    <emailAddress>abc@gmail.com</emailAddress>
```

```

<ssn>123450015</ssn>
<dateOfBirth>1980-10-12</dateOfBirth>
<address>
  <streetAddress1>p2 street address 1</streetAddress1>
  <streetAddress2>p2 street address 2</streetAddress2>
  <city>Boston2</city>
  <stateProvince>MA</stateProvince>
  <postalCode>01892</postalCode>
  <countryCode>USA</countryCode>
</address>
<stakePercent>31</stakePercent>
</principal>
</legalEntityPrincipalCreateRequest>

```

3.6.2 Principal Create Response

The structure of the response message is as follows:

NOTE: Currently, the actual response message does not reflect the structure shown in the schema file for versions 12.x and 13.x. The parent of the response message is **principalCreateResponse**, not **legalEntityPrincipalCreateResponse**.

```

<legalEntityPrincipalCreateResponse> (actual parent is principalCreateResponse)
  <transactionId>Transaction ID</transactionId>
  <principalId>ID of New Principal</principalId>
  <firstName>First Name of Principal</firstName>
  <lastName>Last Name of Principal</lastName>
  <responseCode>Response Code</responseCode>
  <responseDescription>Response Description</responseDescription>
</legalEntityPrincipalCreateResponse>

```

Example: Create Principal Response

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<principalCreateResponse xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <transactionId>8282985303203</transactionId>
  <principalId>2</principalId>
  <firstName>Princ First</firstName>
  <lastName>Princ Last</lastName>
  <responseCode>10</responseCode>
  <responseDescription>Approved</responseDescription>

```

`</principalCreateResponse>`

3.7 Delete a Principal

You can create and associate as many as eleven Principals with a Legal Entity. In the event that the Principals change and you need to remove one or more from association with the Legal Entity, you must delete a Principal. To delete a Principal perform a DELETE operation, specifying the `legalEntityId` with the parameter `principal` and the `principalId`. The system does not require an accompanying XML message.

NOTE: If the `legalEntityType` is `SOLE_PROPRIETORSHIP`, you cannot add or delete Principals.

TABLE 3-12 Resource Information

HTTP Methods	DELETE
Call	/legalentity/legalEntityId/principal/principalId
Request Format	XML
Response Format	XML
Rate Limited	Yes

TABLE 3-13 POST Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the Legal Entity.
principalId	Required	The Id of the Principal to be deleted.

3.7.1 Delete a Principal Response

The structure of the response message is as follows:

NOTE: Currently, the actual response message does not reflect the structure shown in the schema file for versions 12.x and 13.x. The parent of the response message is `principalDeleteResponse`, not `legalEntityPrincipalDeleteResponse`.

```
<legalEntityPrincipalDeleteResponse> (actual parent is principalDeleteResponse)
  <transactionId>82820200338801014</transactionId>
  <legalEntityId>ID of Legal entity</legalEntityId>
  <principalId>Id of Deleted Principal</principalId>
  <responseDescription>Description of Response</responseDescription>
```

```
</legalEntityPrincipalDeleteResponse>
```

Example: Delete a Principal Response

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<legalEntityPrincipalDeleteResponse  
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">  
  <transactionId>82820200338801014</transactionId>  
  <legalEntityId>8</legalEntityId>  
  <principalId>2</principalId>  
  <responseDescription>Legal Entity Principal successfully  
  deleted</responseDescription>  
</legalEntityPrincipalDeleteResponse>
```

3.8 Create Sub-Merchant

Once you have established a Legal Entity, you can create one or more associated Sub-merchants. For example, if the Legal Entity controlled three different business at different locations, you would establish three Sub-merchants under the Legal Entity. You create new Sub-merchants by submitting a `subMerchantCreateRequest` message.

TABLE 3-14 Resource Information

HTTP Methods	POST
Call	/legalentity/legalEntityId/submerchant
Request Format	XML
Response Format	XML
Rate Limited	Yes

TABLE 3-15 POST Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the Legal Entity.

NOTE: After the creation of a Sub-merchant, wait a minimum of two minutes before attempting to process transactions for the Sub-merchant. This is the minimum amount of time required for information about the newly created Sub-merchant to propagate through our system. Attempts to process transactions for a new Sub-merchant sooner than two minutes will result in system errors.

3.8.1 Create Sub-Merchant Request

You must structure a Create Sub-merchant request as shown in the following examples.

```
<subMerchantCreateRequest>
  <merchantName>My Company Name</merchantName>
  <amexMid>Amex Merchant Id</amexMid>
  <discoverConveyedMid>Discover Merchant Id</discoverConveyedMid>
  <url>MyCompany.com</url>
  <customerServiceNumber>9785551234</customerServiceNumber>
  <hardCodedBillingDescriptor>Default Descriptor</hardCodedBillingDescriptor>
  <maxTransactionAmount>100000</maxTransactionAmount>
  <purchaseCurrency>USD</purchaseCurrency>
  <merchantCategoryCode>MCC Number</merchantCategoryCode>
```



```

<taxAuthority>Name of Tax Authority</taxAuthority> (MCC 9311 only)
<taxAuthorityState>State of Tax Authority</taxAuthorityState> (MCC 9311 only)
<bankRoutingNumber>123456789</bankRoutingNumber>
<bankAccountNumber>1234</bankAccountNumber>
<pspMerchantId>012345</pspMerchantId>
<fraud>
<amexAcquired>
<address>
<primaryContact>
<createCredentials>true</createCredentials>
<eCheck>
<subMerchantFunding>
<settlementCurrency>USD</settlementCurrency>
<merchantCategoryTypes>
<methodOfPayments>
</subMerchantCreateRequest>

```

Example: Create Sub-merchant Request

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<subMerchantCreateRequest
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <merchantName>Merchant Name</merchantName>
  <amexMid>1234567890</amexMid>
  <discoverConveyedMid>123456789012345</discoverConveyedMid>
  <url>http://merchantUrl</url>
  <customerServiceNumber>8407809000</customerServiceNumber>
  <hardCodedBillingDescriptor>billing Descriptor</hardCodedBillingDescriptor>
  <maxTransactionAmount>8400</maxTransactionAmount>
  <purchaseCurrency>USD</purchaseCurrency>
  <merchantCategoryCode>5964</merchantCategoryCode>
  <bankRoutingNumber>840123124</bankRoutingNumber>
  <bankAccountNumber>84012312415</bankAccountNumber>
  <pspMerchantId>123456</pspMerchantId>
  <fraud enabled="true"></fraud>
  <amexAcquired enabled="false"></amexAcquired>
  <address>
    <streetAddress1>Street Address 1</streetAddress1>
    <streetAddress2>Street Address 2</streetAddress2>
    <city>City</city>
    <stateProvince>MA</stateProvince>
    <postalCode>01970</postalCode>
  </address>
</subMerchantCreateRequest>

```

```

    <countryCode>USA</countryCode>
  </address>
  <primaryContact>
    <firstName>John</firstName>
    <lastName>Doe</lastName>
    <emailAddress>John.Doe@company.com</emailAddress>
    <phone>9785552222</phone>
  </primaryContact>
  <createCredentials>true</createCredentials>
  <eCheck enabled="true">
    <eCheckCompanyName>Your Company Name</eCheckCompanyName>
    <eCheckBillingDescriptor>9785552222</eCheckBillingDescriptor>
  </eCheck>
  <subMerchantFunding enabled="false"></subMerchantFunding>
  <settlementCurrency>USD</settlementCurrency>
</subMerchantCreateRequest>

```

Example: Create Sub-merchant Request with Dynamic Payout

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<subMerchantCreateRequest
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <merchantName>Merchant Name</merchantName>
  <discoverConveyedMid>123456789012345</discoverConveyedMid>
  <url>http://merchantUrl</url>
  <customerServiceNumber>8407809000</customerServiceNumber>
  <hardCodedBillingDescriptor>billing Descriptor</hardCodedBillingDescriptor>
  <maxTransactionAmount>8400</maxTransactionAmount>
  <purchaseCurrency>USD</purchaseCurrency>
  <merchantCategoryCode>5964</merchantCategoryCode>
  <bankRoutingNumber>840123124</bankRoutingNumber>
  <bankAccountNumber>84012312415</bankAccountNumber>
  <pspMerchantId>123456</pspMerchantId>
  <fraud enabled="true"></fraud>
  <amexAcquired enabled="true"></amexAcquired>
  <address>
    <streetAddress1>Street Address 1</streetAddress1>
    <streetAddress2>Street Address 2</streetAddress2>
    <city>City</city>
    <stateProvince>MA</stateProvince>
    <postalCode>01970</postalCode>
    <countryCode>USA</countryCode>
  </address>
  <primaryContact>
    <firstName>John</firstName>

```

```

    <lastName>Doe</lastName>
    <emailAddress>John.Doe@company.com</emailAddress>
    <phone>9785552222</phone>
  </primaryContact>
  <createCredentials>true</createCredentials>
  <eCheck enabled="true">
    <eCheckCompanyName>Your Company Name</eCheckCompanyName>
    <eCheckBillingDescriptor>9785552222</eCheckBillingDescriptor>
  </eCheck>
  <subMerchantFunding enabled="true">
    <fundingSubmerchantId>Unique Identifier</fundingSubmerchantId>
  </subMerchantFunding>
  <settlementCurrency>USD</settlementCurrency>
</subMerchantCreateRequest>

```

Example: Create Sub-merchant Request with Managed Payout

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<subMerchantCreateRequest
  xmlns="http://payfac.vantivcn.com/api/merchant/onboard">
  <merchantName>Merchant Name</merchantName>
  <amexMid>1234567890</amexMid>
  <discoverConveyedMid>123456789012345</discoverConveyedMid>
  <url>http://merchantUrl</url>
  <customerServiceNumber>8407809000</customerServiceNumber>
  <hardCodedBillingDescriptor>billing Descriptor</hardCodedBillingDescriptor>
  <maxTransactionAmount>8400</maxTransactionAmount>
  <purchaseCurrency>USD</purchaseCurrency>
  <merchantCategoryCode>5964</merchantCategoryCode>
  <bankRoutingNumber>840123124</bankRoutingNumber>
  <bankAccountNumber>84012312415</bankAccountNumber>
  <pspMerchantId>123456</pspMerchantId>
  <fraud enabled="true"></fraud>
  <amexAcquired enabled="false"></amexAcquired>
  <address>
    <streetAddress1>Street Address 1</streetAddress1>
    <streetAddress2>Street Address 2</streetAddress2>
    <city>City</city>
    <stateProvince>MA</stateProvince>
    <postalCode>01970</postalCode>
    <countryCode>USA</countryCode>
  </address>
  <primaryContact>
    <firstName>John</firstName>
    <lastName>Doe</lastName>

```

```

    <emailAddress>John.Doe@company.com</emailAddress>
    <phone>9785552222</phone>
</primaryContact>
<createCredentials>>true</createCredentials>
<eCheck enabled="true">
    <eCheckCompanyName>Your Company Name</eCheckCompanyName>
    <eCheckBillingDescriptor>9785552222</eCheckBillingDescriptor>
</eCheck>
<subMerchantFunding enabled="true">
    <feeProfile>Fee Profile Id</feeProfile>
</subMerchantFunding>
<settlementCurrency>USD</settlementCurrency>
</subMerchantCreateRequest>

```

3.8.2 Create Sub-Merchant Response

The response message to the Create Sub-merchant request has the following structure:

```

<subMerchantCreateResponse>
    <transactionId>0123456789</transactionId>
    <subMerchantId>1</subMerchantId>
    <merchantIdentString>123456789</merchantIdentString>
    <originalSubMerchant> (included only in some duplicate cases)
    <credentials> (included only if credentials requested)
    <paypageCredentials> (only if credentials requested and PayPage enabled)
    <amexSellerId>1234567890</amexSellerId>
</subMerchantCreateResponse>

```

NOTE: If the submission is a duplicate with changed data, the **submerchantId** and **merchantIdentString** elements appear as children of the **originalSubmerchant** element.

Example: Create Sub-merchant Response with Credentials

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<subMerchantCreateResponse
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <transactionId>82821240469914003</transactionId>
  <subMerchantId>1100003</subMerchantId>
  <merchantIdentString>01100003</merchantIdentString>
  <credentials>
    <username>JDoe123</username>
    <password>MyPassword</password>
  </credentials>
</subMerchantCreateResponse>

```

```

    <passwordExpirationDate>2016-06-30T23:59:59-05:00</passwordExpirationDate>
  </credentials>
  <paypageCredentials>
    <paypageCredential>
      <username>JDoe123</username>
      <paypageId>1234567890123456</paypageId>
    </paypageCredential>
  </paypageCredentials>
  <amexSellerId>1234567890</amexSellerId>
</subMerchantCreateResponse>

```

Example: Create Sub-merchant Response - Duplicate with All Data Matching

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<subMerchantCreateResponse
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard" duplicate="true">
  <transactionId>82821240469914003</transactionId>
  <subMerchantId>1100003</subMerchantId>
  <merchantIdentString>01100003</merchantIdentString>
</subMerchantCreateResponse>

```

Example: Create Sub-merchant Response - Duplicate with Data Not Matching

```

<subMerchantCreateResponse
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard" duplicate="true">
  <transactionId>82821240469914003</transactionId>
  <originalSubMerchant>
    <merchantName>Merchant Name</merchantName>
    <amexMid>1234567890</amexMid>
    <discoverConveyedMid>123456789012345</discoverConveyedMid>
    <url>http://merchantUrl</url>
    <customerServiceNumber>8407809000</customerServiceNumber>
    <hardCodedBillingDescriptor>billing Descriptor</hardCodedBillingDescriptor>
    <maxTransactionAmount>8400</maxTransactionAmount>
    <purchaseCurrency>USD</purchaseCurrency>
    <merchantCategoryCode>5964</merchantCategoryCode>
    <bankRoutingNumber>840123124</bankRoutingNumber>
    <bankAccountNumber>84012312415</bankAccountNumber>
    <pspMerchantId>123456</pspMerchantId>
    <address>
      <streetAddress1>Street Address 1</streetAddress1>
      <streetAddress2>Street Address 2</streetAddress2>
      <city>City</city>
      <stateProvince>MA</stateProvince>
      <postalCode>01970</postalCode>
    </address>
  </originalSubMerchant>
</subMerchantCreateResponse>

```

```
<countryCode>USA</countryCode>
</address>
<primaryContact>
  <firstName>John</firstName>
  <lastName>Doe</lastName>
  <phone>9785552222</phone>
  <emailAddress>John.Doe@company.com</emailAddress>
</primaryContact>
<subMerchantId>1002</subMerchantId>
<merchantIdentString>01100002</merchantIdentString>
</originalSubMerchant>
</subMerchantCreateResponse>
```

3.9 Update Sub-Merchant

You can update the several items associated with a Sub-merchant. To update information associated with a Sub-merchant, you submit a `subMerchantUpdateRequest` message with the appropriate `legalEntityId`, `subMerchantId`, and the updated information.

NOTE: If/when the bank account and routing number of the Sub-merchant changes, it is important that you notify us as soon as possible, so that our required records are always up to date.

Also, please consult your Implementation Consultant before updating the American Express Merchant Id (**amexMid** element) or the Discover Merchant Id (**discoverConveyedMid** element), since this information has direct impact on transaction processing.

You can update the following items:

- url
- customerServiceNumber
- hardCodedBillingDescriptor
- maxTransactionAmount
- bankRoutingNumber
- bankAccountNumber
- eCheckBillingDescriptor
- amexMid
- disable
- eCheck
- streetAddress1
- streetAddress2
- city
- stateProvince
- postalCode
- primaryContact
- eCheckCompanyName
- discoverConveyedMid
- fraud
- submerchantFunding
- merchantCategoryTypes
- methodsOfPayment

TABLE 3-16 Resource Information

HTTP Methods	PUT
Call	/legalentity/legalEntityId/submerchant/subMerchantId
Request Format	XML
Response Format	XML
Rate Limited	Yes

TABLE 3-17 PUT Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the Legal Entity
subMerchantId	Required	The Id of the Sub-merchant

3.9.1 Update a Sub-Merchant

You must structure an Update Sub-merchant message as shown in the following examples:

```

<subMerchantUpdateRequest>
  <amexMid>Amex Merchant Id</amexMid>
  <discoverConveyedMid>Discover Merchant Id</discoverConveyedMid>
  <url>MyCompany.com</url>
  <customerServiceNumber>9785551234</customerServiceNumber>
  <hardCodedBillingDescriptor>Default Descriptor</hardCodedBillingDescriptor>
  <maxTransactionAmount>100000</maxTransactionAmount>
  <bankRoutingNumber>123456789</bankRoutingNumber>
  <bankAccountNumber>1234</bankAccountNumber>
  <pspMerchantId>123456</pspMerchantId>
  <purchaseCurrency>USD</purchaseCurrency>
  <address>My Company Name</address>
  <primaryContact>
  <disable>>true or false</disable>
  <fraud>
  <amexAcquired>
  <eCheck>
  <subMerchantFunding>
  <taxAuthority>Name of Tax Authority</taxAuthority> (MCC 9311 only)
  <taxAuthorityState>State of Tax Authority</taxAuthorityState> (MCC 9311 only)
  <merchantCategoryTypes>
  <methodOfPayments>
</subMerchantUpdateRequest>

```

Example: Update a Sub-Merchant Request

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<subMerchantUpdateRequest
  xmlns="http://payfac.vantivcn.com/api/merchant/onboard">

```



```

<amexMid>1234567890</amexMid>
<discoverConveyedMid>123456789012345</discoverConveyedMid>
<url>http://merchantUrl</url>
<customerServiceNumber>8407809000</customerServiceNumber>
<hardCodedBillingDescriptor>Descriptor</hardCodedBillingDescriptor>
<maxTransactionAmount>8400</maxTransactionAmount>
<bankRoutingNumber>840123124</bankRoutingNumber>
<bankAccountNumber>84012312415</bankAccountNumber>
<pspMerchantId>785412365</pspMerchantId>
<purchaseCurrency>USD</purchaseCurrency>
<address>
  <streetAddress1>Street Address 1</streetAddress1>
  <streetAddress2>Street Address 2</streetAddress2>
  <city>City</city>
  <stateProvince>MA</stateProvince>
  <postalCode>01970</postalCode>
</address>
<primaryContact>
  <firstName>John</firstName>
  <lastName>Doe</lastName>
  <phone>9785552222</phone>
  <emailAddress>John.Doe@company.com</emailAddress>
</primaryContact>
<fraud enabled="true"></fraud>
<amexAcquired enabled="false"></amexAcquired>
<eCheck enabled="true">
  <eCheckBillingDescriptor>9785552222</eCheckBillingDescriptor>
  <eCheckCompanyName>Your Company Name</eCheckCompanyName>
</eCheck>
</subMerchantUpdateRequest>

```

3.9.2 Update a Sub-Merchant Response

The system replies to an Update Sub-merchant request with a generic response message. The structure of the response message is as follows:

```

<response>
  <transactionId>1234567890123456789</transactionId>
</response>

```

Example: Update Sub-Merchant Response

```

<?xml version="1.0" encoding="UTF-8" standalone="true"?>
<response xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">

```

```
<transactionId>82820200338801022</transactionId>
</response>
```

3.10 Retrieve Sub-Merchant

If you need to retrieve the latest information on file related to a Sub-merchant for verification purposes, you must perform a GET operation specifying the `legalEntityId` and `subMerchantId`. A retrieval request does not require an accompanying XML message.

NOTE: If you are processing transactions only on the Worldpay eCommerce platform and using Dynamic Payout, after creating a Sub-merchant using a value of `AUTO_GENERATE` for the `fundingSubmerchantId`, retrieve the assigned `fundingSubmerchantId` value by submitting a Sub-merchant Retrieval Request.

TABLE 3-18 Resource Information

HTTP Methods	GET
Call	/legalentity/legalEntityId/submerchant/subMerchantId
Request Format	XML
Response Format	XML
Rate Limited	Yes

TABLE 3-19 GET Parameters

Parameter	Required or Optional	Description
legalEntityId	Required	The Id of the Legal Entity
subMerchantId	Required	The Id of the Sub-merchant

3.10.1 Retrieve Sub-Merchant Response

The retrieve Sub-merchant response message has the following structure:

```
<subMerchantRetrievalResponse>
  <merchantName>My Company Name</merchantName>
  <amexMid>Amex Merchant Id</amexMid>
  <discoverConveyedMid>Discover Merchant Id</discoverConveyedMid>
  <url>MyCompany.com</url>
  <customerServiceNumber>9785551234</customerServiceNumber>
```

```

<hardCodedBillingDescriptor>Default Descriptor</hardCodedBillingDescriptor>
<maxTransactionAmount>100000</maxTransactionAmount>
<purchaseCurrency>USD</purchaseCurrency>
<merchantCategoryCode>MCC Number</merchantCategoryCode>
<bankRoutingNumber>123456789</bankRoutingNumber>
<bankAccountNumber>XXXXX-1234</bankAccountNumber>
<pspMerchantId>012345</pspMerchantId>
<fraud>
<amexAcquired>
<address>
<primaryContact>
<createCredentials>true</createCredentials>
<eCheck>
<subMerchantFunding>
<settlementCurrency>USD</settlementCurrency>
<merchantCategoryTypes>
<methodOfPayments>
<subMerchantId>1</subMerchantId>
<amexSellerId>1234567890</amexSellerId>
<disabled>>true or false</disabled>
<transactionId>0123456789</transactionId>
<merchantIdentString>011000022</merchantIdentString>
<credentials>
<paypageCredentials>
<updateDate>2013-04-30T11:18:23.127-04:00</updateDate>
</subMerchantretrievalResponse>

```

Example: Retrieval Sub-Merchant Response

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<subMerchantRetrievalResponse
  xmlns="http://payfac.vantivcnp.com/api/merchant/onboard">
  <merchantName>Merchant Name</merchantName>
  <amexMid>1234567890</amexMid>
  <discoverConveyedMid>123456789012345</discoverConveyedMid>
  <url>http://merchantUrl.com</url>
  <customerServiceNumber>8407809000</customerServiceNumber>
  <hardCodedBillingDescriptor>billing Descriptor</hardCodedBillingDescriptor>
  <maxTransactionAmount>100000</maxTransactionAmount>

```

```

<purchaseCurrency>USD</purchaseCurrency>
<merchantCategoryCode>5964</merchantCategoryCode>
<bankRoutingNumber>840123124</bankRoutingNumber>
<bankAccountNumber>XXXXX-3124</bankAccountNumber>
<pspMerchantId>123456</pspMerchantId>
<fraud enabled="false"/>
<address>
  <streetAddress1>Street Address 1</streetAddress1>
  <streetAddress2>Street Address 2</streetAddress2>
  <city>City</city>
  <stateProvince>MA</stateProvince>
  <postalCode>01970</postalCode>
  <countryCode>USA</countryCode>
</address>
<primaryContact>
  <firstName>John</firstName>
  <lastName>Doe</lastName>
  <phone>9785552222</phone>
  <emailAddress>John.Doe@company.com</emailAddress>
</primaryContact>
<eCheck enabled="true">
<eCheckCompanyName>Your Company Name</eCheckCompanyName>
<eCheckBillingDescriptor>9785552222</eCheckBillingDescriptor>
</eCheck>
<subMerchantFunding enabled="true">
  <fundingSubmerchantId>12345678901234</fundingSubmerchantId>
</subMerchantFunding>
<subMerchantId>88899966655544433</subMerchantId>
<amexSellerId>12345678901234</amexSellerId>
<disabled>>true or false</disabled>
<transactionId>82820200338801105</transactionId>
<merchantIdentString>011000022</merchantIdentString>
<credentials>
  <userName>UserName</userName>
  <password>Password</password>
  <passwordExpirationDate>2017-10-03T11:18:23.127-04:00</passwordExpirationDate>
</credentials>
<paypageCredentials>
  <paypageCredential>
    <userName>PSPxm1V8</userName>
    <paypageId>Asd23thI974Jpk32</paypageId>
  </paypageCredential>
  <paypageCredential>
    <userName>PSPxm1V8Two</userName>

```

```
<paypageId>odzhgcbQX3e3EaKV</paypageId>
</paypageCredential>
<paypageCredential>
  <userName>PSPxm1V8Three</userName>
  <paypageId>qmnpUBM6G47YJAcq</paypageId>
</paypageCredential>
</paypageCredentials>
<updateDate>2017-09-30T11:18:23.127-04:00</updateDate>
</subMerchantRetrievalResponse>
```

3.11 Retrieve Allowed MCC List

You can retrieve the list of Merchant Category Codes, which are pre-approved for your use. When on-boarding a new Sub-merchant, a Payment Service Provider should only use one of the approved MCCs, appropriate to the Sub-merchant. To retrieve the allowed MCC list perform a GET operation, specifying the `legalEntityId` with the parameter `mcc`. In the case of a request to retrieve the allowed MCC list, the system does not require an accompanying XML message.

NOTE: Should you anticipate the need for new or different MCCs beyond those approved, please contact your Customer Experience Manager or our Underwriting team for additional information.

TABLE 3-20 Resource Information

HTTP Methods	GET
Call	/mcc
Request Format	XML
Response Format	XML
Rate Limited	Yes

3.11.1 Retrieve MCC List Response

The structure of the response message is as follows:

```
<approvedMccResponse>
  <transactionId>1234567890123456789</transactionId>
  <approvedMccs>
    <approvedMcc>Merchant Category Code</approvedMcc>
  </approvedMccResponse>
```

Example: Retrieve MCC List Response

```
<?xml version="1.0" encoding="utf-8" standalone="yes"?>
<approvedMccResponse xmlns="http://payfac.vantivcn.com/api/merchant/onboard">
  <transactionID>82820200338801014</transactionID>
  <approvedMccs>
    <approvedMcc>4890</approvedMcc>
    <approvedMcc>4891</approvedMcc>
    ...
    <approvedMcc>4896</approvedMcc>
  </approvedMccs>
</approvedMccResponse>
```

3.12 Status Codes and Error Messages

The HTTP Status Codes provide information about the success or failure of a transaction. In the case of a failure, an `errorResponse` message will contain additional information.

TABLE 3-21 HTTP Status Codes

Code	Description
200	Update/Retrieval/Disable is successful
201	Create call is successful
400	Invalid Request. For example: <ul style="list-style-type: none"> requested legal entity/sub merchant doesn't exist invalid field data (data is too long, required data is not sent) extra fields found in request attempt to create sub merchant for unapproved legal entity The response message will contain more details.
401	Failed Authentication
429	Too many requests: Exceeded X concurrent requests allowed for OrganizationId xxxxxx.
500	Internal error. There is an issue with your Worldpay configuration. Please contact your Relationship Manager to provide information about the error and time of occurrence, so we can resolve the issue.
503	Returns for a soft decline or if the background checking service is unavailable. For a soft decline, please verify the submitted information and retry. If the service was unavailable, the Retry-After header contains a suggested retry time.

3.12.1 Error Response Message

The structure of the Error response message is as follows:

```
<errorResponse>
  <transactionId>1234567890123456789</transactionId>
  <errors>
    <error>Error Message</error>
  </errors>
</errorResponse>
```

Example: Error Response - Status Code 400

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<errorResponse>
```

```

<transactionId>82820205828260878</transactionId>
<errors>
  <error>Error in Request:Legal Entity [Entity Name] has not been
  approved</error>
</errors>
</errorResponse>

```

or

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<errorResponse>
  <errors>
    <error>Error of [may not be null] on
    [subMerchantCreateRequest.merchantCategoryCode]</error>
    <error>Error of [size must be between 1 and 50] on
    [subMerchantCreateRequest.merchantName]</error>
  </errors>
</errorResponse>

```

Example: Error Response - Status Code 401

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<errorResponse>
  <errors>
    <error>You are not authorized to access this resource. Please check your
    credentials.</error>
  </errors>
</errorResponse>

```

Example: error Response - Status Code 500

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<errorResponse>
  <errors>
    <error>Internal error. There is an issue with your Worldpay configuration.
    Please contact your Relationship Manager to provide information about the error
    and time of occurrence, so we can resolve the issue.</error>
  </errors>
</errorResponse>

```

PayFac API XML Elements

This chapter provides definitions for the elements used in PayFac API. This information is intended to assist you as you build the code necessary to submit messages creating and updating Legal Entities and Sub-merchants. Each section defines a particular element, its relationship to other elements (parents and children), as well as any attributes associated with the element.

For additional information on the structure of requests and responses using these elements, as well as XML examples, please refer to [Chapter 3, "PayFac API Transaction Examples"](#).

The XML elements defined in this chapter appear alphabetically.

4.1 acceptanceDateTime

The `acceptanceDateTime` element is a required child of the `legalEntityAgreement` element and defines date and time the party signing agreed to the Legal Entity Agreement.

Type = `dateTime`; **Format** = `YYYY-MM-DDTHH:MM:SS+/-HH:MM`

NOTE: The `+/-HH:MM` portion of the `dateTime` format represents the offset from UTC time. For example, for Boston the value would be `-05:00`, meaning five hours behind UTC time.

Parent Elements:

[legalEntityAgreement](#)

Attributes:

None

Child Elements:

None

4.2 address

The parent element of several address related child elements. Although listed in the schema as an optional child of the `principal` element, you must include address information for principals.

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityUpdateRequest](#), [principal](#), [legalEntityRetrievalResponse](#), [subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

NOTE: When you include the `address` element in a `legalEntityUpdateRequest` message, you can not update the `countryCode` child element.

Attributes:

None

Child Elements:

[streetAddress1](#), [streetAddress2](#), [city](#), [stateProvince](#), [postalCode](#), [countryCode](#)

Example: Address Structure

```
<address>
  <streetAddress1>100 Main Street</streetAddress1>
  <streetAddress2>Suite 400</streetAddress2>
  <city>Lowell</city>
  <stateProvince>MA</stateProvince>
  <postalCode>01852</postalCode>
  <countryCode>USA</countryCode>
</address>
```

4.3 addressVerified

The `addressVerified` element is an optional child of the `verificationIndicators` element. A value of **true** indicates that the address was verified, while a value of **false** indicates that the address could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None

4.4 agreements

The `agreements` element is an optional child of the `legalEntityAgreementRetrievalResponse` message and contains a child element that define the agreements associated with the Legal Entity designated in the request. If this element is not returned in the response or is empty, the Legal Entity does not yet have any associated agreements. If the Legal Entity has multiple associated agreements, there will be multiple `legalEntityAgreement` child elements, one for each agreement.

Parent Elements:

[legalEntityAgreementRetrievalResponse](#)

Attributes:

None

Child Elements:

[legalEntityAgreement](#)

Example: agreements Structure

```
<agreements>
  <legalEntityAgreement>
    <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
    <agreementVersion>Agreement Version Number</agreementVersion>
    <userFullName>Full Name of Signer</userFullName>
    <userSystemName>User Name of Signer of PayFac System</userSystemName>
    <userIPAddress>IP Address of Signer's system</userIPAddress>
    <manuallyEntered>true or false</manuallyEntered>
    <acceptanceDateTime>Date and Time Agreement Signed</acceptanceDateTime>
  </legalEntityAgreement>
</agreements>
```

4.5 agreementVersion

The `agreementVersion` element is a required child of the `legalEntityAgreement` element and defines the version of Legal Entity Agreement.

Type = String; minLength = 1; maxLength = 50

Parent Elements:

[legalEntityAgreement](#)

Attributes:

None

Child Elements:

None

4.6 allowedTransactionType

The `allowedTransactionType` element is a required child of the `method` element and specifies the possible transaction types allowed for the method of payment specified by the `paymentType` element. The `selectedTransactionType` shows the actual allowed type for the method of payment. Possible values are: NONE, REFUNDS_ONLY, DEPOSITS_ONLY, and DEPOSITS_AND_REFUNDS.

NOTE: Although the schema does not present this element as an enumeration, the values listed above are the only allowed values.

Type = String; minLength = N/A; maxLength = N/A

Parent Elements:

[method](#)

Attributes:

None

Child Elements:

None

4.7 amexAcquired

The `amexAcquired` element is an optional child of the `subMerchantCreateRequest` and contains an attribute that indicates if the Sub-merchant is using the American Express Opt Blue program. The element is also a child of the `subMerchantUpdateRequest` and the `subMerchantRetrievalResponse` structures.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

Attribute Name	Type	Required?	Description
enabled	Boolean	Yes	Defines if Amex Opt Blue processing is enabled for this sub-merchant. Valid values are either true or false .

Child Elements:

None

4.8 amexMid

The `amexMid` element is an optional child of the `subMerchantCreateRequest` element and specifies the American Express Merchant Id of the Sub-merchant. If you accept American Express transactions other than Opt Blue, you must submit the Merchant Id provided by American Express.

Type = String; **minLength** = 1; **maxLength** = 15

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.9 amexSellerId

The `amexSellerId` element is an optional child of the `subMerchantCreateResponse` and the `subMerchantRetrievalResponse` elements. This value is the American Express Seller Id assigned to the Sub-merchant. We return this value to you for your use when you communicate Sub-merchant profile information to American Express. We also includes this information in AmEx transactions, when we submit them for approval.

Type = String; **minLength** = N/A; **maxLength** = 32

Parent Elements:

[subMerchantCreateResponse](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.10 annualCreditCardSalesVolume

The `annualCreditCardSalesVolume` element is a required child of the `legalEntityCreateRequest` element and defines the approximate annual credit card sales expected to be processed under this Legal Entity, in USD.

Type = Integer; **minLength** = 1; **maxLength** = 23

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityRetrievalResponse](#), [legalEntityUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.11 approvedMcc

The `approvedMcc` element is a child of the `approvedMccs` element and defines an approved Merchant Category Code for a Legal Entity/Sub-merchant.

Parent Elements:

[approvedMccs](#)

Attributes:

None

Child Elements:

None

4.12 approvedMccResponse

The `approvedMccResponse` element is the parent element for the XML message returned by the platform in response to a Approved MCC List retrieval request.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

[transactionId](#), [approvedMccs](#)

4.13 approvedMccs

The `approvedMccs` element is a required child of the `approvedMccResponse` message and contains a child element that define the list of Merchant Category Codes approved for use with Legal Entity/Sub-merchant.

Parent Elements:

[approvedMccResponse](#)

Attributes:

None

Child Elements:

[approvedMcc](#)

Example: approvedMccs Structure

```
<approvedMccs>
  <approvedMcc>4890</approvedMcc>
  <approvedMcc>4891</approvedMcc>
  <approvedMcc>4892</approvedMcc>
  ...
  <approvedMcc>4899</approvedMcc>
</approvedMccs>
```

4.14 backgroundCheckDecisionNotes

The `backgroundCheckDecisionNotes` element is an optional child of the `backgroundCheckResults` element and provides additional information about the background check performed by us.

NOTE: If the Legal Entity was declined after a manual review, this element will contain information relating to the reason for the decline.

Type = String; minLength = N/A; maxLength = 2000

Parent Elements:

[backgroundCheckResults](#)

Attributes:

None

Child Elements:

None

4.15 backgroundCheckFields

The `backgroundCheckFields` element has multiple uses in the schema. This element is an optional child of the `legalEntityUpdateRequest` element, where it designates information about the Legal Entity. The element is also an optional child of the `principal` element, where it designates information about the Principal of the Legal Entity.

Parent Elements:

`legalEntityResponse`, `principal`

Attributes:

None

Child Elements (when used in `legalEntityUpdateRequest`):

All Optional: `legalEntityName`, `legalEntityType`, `taxId`

Example: `backgroundCheckFields` Structure when used in `legalEntityUpdateRequest`

```
<backgroundCheckFields>
  <legalEntityName>XYZ Co.</legalEntityName>
  <legalEntityType>LIMITED_LIABILITY_COMPANY</legalEntityType>
  <taxId>012345678</taxId>
</backgroundCheckFields>
```

Child Elements (when used in `principal`):

All Optional: `firstName`, `lastName`, `ssn`, `dateOfBirth`, `driversLicense`, `driversLicenseState`,

Example: `backgroundCheckFields` Structure when used in `principal`

```
<backgroundCheckFields>
  <firstName>John</firstName>
  <lastName>Doe</lastName>
  <ssn>012345678</ssn>
  <dateOfBirth>1958-12-12</dateOfBirth>
  <driversLicense>S123456789</driversLicense>
  <driversLicenseState>MA</driversLicenseState>
</backgroundCheckFields>
```


4.16 backgroundCheckResults

The `backgroundCheckResults` element is an optional child of both the `legalEntityCreateResponse` message and the `legalEntityRetrievalResponse` message. It contains child elements that provide scores and other information from the background checks performed by us.

Parent Elements:

[legalEntityResponse](#), [legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

[business](#), [principal](#), [businessToPrincipalAssociation](#), [backgroundCheckDecisionNotes](#), [bankruptcyData](#), [lienResult](#)

4.17 bankAccountNumber

The `bankAccountNumber` element is a required child of the `subMerchantCreateRequest` element and the `subMerchantRetrievalResponse`, where it specifies the account number of the merchant account used to fund the Sub-merchant. The element is also an optional child of the `subMerchantUpdateRequest` element.

NOTE: When returned in the `submerchantRetrievalResponse`, Worldpay masks the first five characters of the `bankAccountNumber`, as shown in the example below.

```
<bankAccountNumber>XXXXX-1234</bankAccountNumber>
```

Type = String; minLength = 1; maxLength = 50

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.18 bankRoutingNumber

The `bankRoutingNumber` element is a required child of the `subMerchantCreateRequest` element and specifies the routing number of the merchant account used to fund the Sub-merchant. The element is also an optional child of the `subMerchantUpdateRequest` element.

Type = String; **minLength** = 1; **maxLength** = 50

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.19 bankruptcyCount

The `bankruptcyCount` element is an optional child of the `bankruptcyData` element and specifies the count of bankruptcy records found.

Type = int; **totalDigits** = N/A

Parent Elements:

[bankruptcyData](#)

Attributes:

None

Child Elements:

None

4.20 bankruptcyData

The `bankruptcyData` element is an optional child of the `backgroundCheckResults` element. It contains child elements that provides information about bankruptcy history of the company from the background checks performed by us.

Parent Elements:

[backgroundCheckResults](#)

Attributes:

None

Child Elements:

[bankruptcyType](#), [bankruptcyCount](#), [companyName](#), [streetAddress1](#), [streetAddress2](#), [city](#), [state](#), [zip](#), [zip4](#), [filingDate](#)

Example: bankruptcyData Structure

```
<bankruptcyData>
  <bankruptcyType>Sub-category of bankruptcy</bankruptcyType>
  <bankruptcyCount>1</bankruptcyCount>
  <companyName>Company Name</companyName>
  <streetAddress1>100 Main Street</streetAddress1>
  <streetAddress2>Suite 2</streetAddress2>
  <city>Boston</city>
  <state>MA</state>
  <zip>01150</zip>
  <zip4>2202</zip4>
  <filingDate>2011-05-13</filingDate>
</bankruptcyData>
```

4.21 bankruptcyType

The `bankruptcyType` element is an optional child of the `bankruptcyData` element and specifies the sub-type of bankruptcy discovered during the background check process.

Type = String; **minLength** = N/A; **maxLength** = 50

Parent Elements:

[bankruptcyData](#)

Attributes:

None

Child Elements:

None

4.22 business

The `business` element is a child of the `backgroundCheckResults` element and contains child elements providing the results of background checks performed on the Legal Entity.

Parent Elements:

[backgroundCheckResults](#)

Attributes:

None

Child Elements:

[verificationResult](#)

Example: business Structure

```
<business>
  <verificationResult>
    <overallScores>
      <score>Overall results for Business</score>
      <description>Text Description of Score</description>
    </overallScores>
    <nameAddressTaxIdAssociation>
      <code>Name_Address_TIN_info</code>
      <description>Text Description of Code</description>
    </nameAddressTaxIdAssociation>
    <nameAddressPhoneAssociation>
      <code>Name_Address_Phone_info</code>
      <description>Text Description of Code</description>
    </nameAddressPhoneAssociation>
    <verificationIndicators>
      <nameVerified>true or false</nameVerified>
      <addressVerified>true or false</addressVerified>
      <cityVerified>true or false</cityVerified>
      <zipVerified>true or false</zipVerified>
      <phoneVerified>true or false</phoneVerified>
      <taxIdVerified>true or false</taxIdVerified>
    </verificationIndicators>
    <riskIndicators>
```

```
<riskIndicator>  
  <code>Risk Indicator Info</code>  
  <description>Text Description of Code</description>  
</riskIndicator>  
</riskIndicators>  
</verificationResult>  
</business>
```


4.23 businessToPrincipalAssociation

The `businessToPrincipalAssociation` element is an optional child of the `verificationResult` element and contains child elements providing background check information about how tightly coupled the principal is to the Legal Entity.

Parent Elements:

`backgroundCheckResults`

Attributes:

None

Child Elements:

`score`, `description`

Example: businessToPrincipalAssociation Structure

```
<businessToPrincipalAssociation>
  <score>Results for Business to Principal</score>
  <description>Text Description of Score</description>
</businessToPrincipalAssociation>
```

4.24 categoryType

The `categoryType` element is a required child of the `merchantCategoryTypes` element and specifies category of the Sub-merchant. The parent can included an unlimited number of `categoryType` elements. At this time, the only valid values are: **SM** - Visa Small Merchant, **GC** - Government Corporation, or **CLEAR** - Clear stored values.

NOTE: To add a `categoryType` value to an existing Sub-merchant, the update request you submit must include all previously set values along with the new value. Submitting only the new value overwrites the previously set value.

Type = String; minLength = N/A; maxLength = N/A

Parent Elements:

[merchantCategoryTypes](#)

Attributes:

None

Child Elements:

None

4.25 city

The `city` element defines the city of either the Legal Entity, principal, or Sub-merchant. This element is always required for a Legal Entity and is also required for a principal if the `legalEntityType` is Sole Proprietorship. It is optional for all other `legalEntityType` values and for Sub-merchants.

The `city` element is also an optional child of both the `bankruptcyData` and `lienResults` elements, where it specifies the city of the company with bankruptcy or lien information.

IMPORTANT: The system validates the value for `city` when a child of the principal's `address` element and generates an error for any of the following conditions:

- Empty or spaces
- A single character
- Starts with a special character
- Contains a PO Box

Type = String; **minLength** = 1; **maxLength** = 20 (for `address`)

Type = String; **minLength** = 1; **maxLength** = 30 (for `bankruptcyData` or `lienResult`)

Parent Elements:

[address](#), [bankruptcyData](#), [lienResult](#)

Attributes:

None

Child Elements:

None

4.26 cityVerified

The `cityVerified` element is an optional child of the `verificationIndicators` element, when `verificationIndicators` is a descendant of the `business` element. A value of **true** indicates that the city (of the business) was verified, while a value of **false** indicates that the city could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None

4.27 code

The `code` element is used in several locations and its meaning depends upon the parent element. In each case the element value is selected from a set of enumerated values.

Type = String (Enum); **minLength** = N/A; **maxLength** = N/A

Parent Elements:

[nameAddressPhoneAssociation](#), [nameAddressTaxIdAssociation](#), [riskIndicator](#), [nameAddressSsnAssociation](#),

Attributes:

None

Child Elements:

None

Enumerations (as a child of `nameAddressTaxIdAssociation`):

Enumeration	Description
NOT_VERIFIED	Supplied information could not be not verified.
WRONG_TAX_ID	Supplied Tax Id is wrong.
NAME_OR_ADDRESS	The name or the address is verified.
BAD_NAME	The name as submitted can not be verified.
BAD_ADDRESS	The address as submitted can not be verified.
MISSING_ADDRESS	The address information is missing from the submitted data.
NAME_AND_ADDRESS_BAD_TAX_ID	Name and address verified; bad Tax Id
NAME_AND_ADDRESS_NO_TAX_ID	Name and address verified; no Tax Id information
NAME_ADDRESS_TAX_ID	Name, address, and Tax Id verified.

Enumerations (as a child of (business) `nameAddressPhoneAssociation`):

Enumeration	Description
NOT_VERIFIED	Supplied information could not be not verified.
WRONG_PHONE	Supplied Phone number is wrong.
NAME_OR_ADDRESS	The name or the address is verified.

Enumeration	Description
BAD_NAME	The name, as submitted, can not be verified.
BAD_ADDRESS	The address, as submitted, can not be verified.
MISSING_ADDRESS	The address information is missing from the submitted data.
NAME_AND_ADDRESS_BAD_PHONE	Name and address verified; bad phone number
NAME_AND_ADDRESS_NO_PHONE	Name and address verified; no phone number submitted
NAME_ADDRESS_PHONE	Name, address, and phone verified.

Enumerations (as a child of nameAddressSsnAssociation):

Enumeration	Description
NOTHING	Supplied information could not be not verified.
WRONG_SSN	Supplied SSN is wrong.
FIRST_LAST	First and last name verified
FIRST_ADDRESS	First name and address.
FIRST_SSN	First name and SSN verified.
LAST_ADDRESS	Last name and address verified.
ADDRESS_SSN	Address and SSN verified.
LAST_SSN	Last name and SSN verified.
FIRST_LAST_ADDRESS	First name, last name, and address verified.
FIRST_LAST_SSN	First name, last name, and SSN verified.
FIRST_ADDRESS_SSN	First name, address, and SSN verified.
LAST_ADDRESS_SSN	Last name, address, and SSN verified.
FIRST_LAST_ADDRESS_SSN	First name, last name, address, and SSN verified.

Enumerations (as a child of (principal) nameAddressPhoneAssociation):

Enumeration	Description
NOTHING	Supplied information could not be not verified.
WRONG_PHONE	Supplied phone number is wrong.

Enumeration	Description
FIRST_LAST	First and last name verified
FIRST_ADDRESS	First name and address.
FIRST_PHONE	First name and phone number verified.
LAST_ADDRESS	Last name and address verified.
ADDRESS_PHONE	Address and phone number verified.
LAST_PHONE	Last name and phone number verified.
FIRST_LAST_ADDRESS	First name, last name, and address verified.
FIRST_LAST_PHONE	First name, last name, and phone number verified.
FIRST_ADDRESS_PHONE	First name, address, and phone number verified.
LAST_ADDRESS_PHONE	Last name, address, and phone number verified.
FIRST_LAST_ADDRESS_PHONE	First name, last name, address, and phone number verified.

Enumerations (as a child of riskIndicator):

Enumeration	Description
UNKNOWN	Supplied information could not be not verified.
SSN_DECEASED	The submitted SSN is reported as deceased.
SSN_PRIOR_TO_DOB	The submitted SSN was issued prior the submitted DOB.
SSN_ADDRESS_PHONE_NOT_MATCH	The submitted name and SSN have been verified, but the address and phone do not match.
SSN_INVALID	The submitted SSN is invalid.
PHONE_NUMBER_DISCONNECTED	The submitted phone number may be disconnected.
PHONE_NUMBER_INVALID	The submitted phone number is invalid.
PHONE_NUMBER_PAGER	The submitted phone number is a pager number.
PHONE_NUMBER_MOBILE	The submitted phone number is a mobile number.
ADDRESS_INVALID	The submitted address may be invalid according to postal specifications.
ZIP_BELONGS_POST_OFFICE	The submitted zip code belongs to a post office box.
ADDRESS_INVALID_APARTMENT_DESIGNATION	The submitted address has an invalid apartment designation.

Enumeration	Description
ADDRESS_COMMERCIAL	The submitted address is a transient commercial or institutional address.
PHONE_NUMBER_COMMERCIAL	The submitted phone number matches a transient commercial or institutional address.
PHONE_NUMBER_ZIP_INVALID	The submitted phone number and zip code combination is invalid.
UNABLE_TO_VERIFY_NAS	Unable to verify name, address, and SSN.
UNABLE_TO_VERIFY_ADDRESS	Unable to verify address.
UNABLE_TO_VERIFY_SSN	Unable to verify SSN.
UNABLE_TO_VERIFY_PHONE	Unable to verify the phone number.
UNABLE_TO_VERIFY_DOB	Unable to verify the date of birth.
SSN_MISKEYED	The submitted SSN may have been miskeyed.
ADDRESS_MISKEYED	The submitted address may have been miskeyed.
PHONE_NUMBER_MISKEYED	The submitted phone number may have been miskeyed.
NUMBER_MATCHES_OFAC	The submitted name matches the Office of Foreign Assets Control (OFAC) file.
UNABLE_TO_VERIFY_NAME	Unable to verify name.
SSN_MATCHES_MULTI_NAMES	The SSN is associated with multiple last names.
SSN_RECENTLY_ISSUED	The SSN is recently issued.
ZIP_CORPORATE_MILITARY	The submitted zip code is a corporate-only, military zip code.
DLL_INVALID	The submitted driver's license number is invalid for the submitted state.
NAME_ADDRESS_MATCH_BANKRUPTCY	The submitted name and address match a bankruptcy.
PHONE_AREA_CODE_CHANGING	The submitted phone number area code is changing.
WORK_PHONE_PAGER	The submitted work phone is a pager number.
UNABLE_TO_VERIFY_FIRST_NAME	Unable to verify the first name.
PHONE_ADDRESS_DISTANT	The submitted phone number and address are physically distant (>10 miles).
ADDRESS_MATCHES_PRISON	The submitted address match a prison address.
SSN_LAST_NAME_NO_MATCH	The submitted last name does not associate with the submitted SSN.
SSN_FIRST_NAME_NO_MATCH	The submitted first name does not associate with the submitted SSN.

Enumeration	Description
WORK_HOME_PHONE_DISTANT	The submitted home phone number and work phone number are physically distant (>100 miles)
NAME_ADDRESS_TIN_MISMATCH	The submitted business name and address match a Tax Identification Number (TIN) different than the submitted TIN.
WORK_PHONE_INVALID	The submitted work phone is potentially invalid.
WORK_PHONE_DISCONNECTED	The submitted work phone is potentially disconnected.
WORK_PHONE_MOBILE	The submitted work phone is a mobile number.
ADDRESS_RETURNS_DIFF_PHONE	The submitted address returns a different phone number.
SSN_LNAME_NOT_MATCHED_FNAME_MATCHED	The submitted SSN is associated with the same first name, but a different last name.
PHONE_RESIDENTIAL_LISTING	The submitted phone number is associated with a residential listing.
SINGLE_FAMILY_DWELLING	The submitted business address may be a residential address (single-family dwelling).
SSN_NOT_FOUND	The submitted SSN is not found in the public record.
SSN_BELONGS_TO_DIFF_NAME_ADDRESS	The submitted SSN is associated with a different name and address.
PHONE_BELONGS_TO_DIFF_NAME_ADDRESS	The submitted phone number is associated with a different name and address.
NAME_ADDRESS_UNLISTED	The submitted name and address are associated with an unlisted phone number.
NAME_MISKEYED	The submitted name may have been miskeyed.
NAME_MISSING	The name was missing.
ADDRESS_MISSING	The address was missing.
SSN_MISSING	The SSN was missing.
PHONE_NUMBER_MISSING	The phone number was missing.
DOB_MISSING	The date of birth was missing.
NAME_ADDRESS_RETURN_DIFF_PHONE	The submitted name and address return a different phone number.
DOB_MISKEYED	The submitted date of birthday have been miskeyed.
SSN_NON_US_CITIZEN	The submitted SSN was issued to a non-US citizen.
ALTERNATE_BUSINESS_NAME_FOUND	The submitted business name not found; alternate business name found
DBA_MATCH_PUBLIC_RECORDS	DBA name matched public records
SSN_RECENT	The submitted SSN was issued in the last three years.

Enumeration	Description
SSN_TOO_OLD	The submitted SSN was issued after age five (post-1990).
TIN_NAME_ADDRESS_MISMATCH	The submitted Tax Identification Number (TIN) is associated with a different business name and address.
BUSINESS_NOT_IN_GOOD_STANDING	The submitted business is not in good standing per the Secretary of State.
NAME_ADDRESS_MATCH_JUDGMENT	The submitted name and address match a judgement and/or lien filing.
BUSINESS_INACTIVE	The submitted business is inactive per the Secretary of State.
NO_UPDATE_IN_LAST_THREE_YEARS	No update to the business record in the last three years.
SSN_NOT_PRIMARY	The submitted SSN is not the primary SSN for the submitted identity.
ZIP_CORP_ONLY	The submitted zip code is a corporate only zip code.
ADDRESS_MISMATCH	The is an address mismatch between city/state and zip code.
DL_DIFFERENT	A different driver's license number was found for the submitted applicant.
DL_NOT_FOUND	The submitted driver's license number was not found.
DL_MISKEYED	The submitted driver's license number may have been miskeyed.
UNABLE_TO_VERIFY_DL	Unable to verify the submitted driver's license number.
SSN_INVALID_SSA	The submitted SSN is possibly randomly issued by the SSA, but invalid when first associated with the submitted identity.
SSN_IS_ITIN	The submitted SSN is an Individual Taxpayer Identification Number (ITIN).
SSN_MULTI_IDENTITY	Multiple SSNs reported for applicant
ZIP_MILITARY	The submitted zip code is a military only zip code.
MULTIPLE_SSN_FOUND	Multiple SSNs reported for the applicant.
ADDRESS_DISCREPANCY	Potential address discrepancy - the submitted address may be a previous address.
ADDRESS_PO_BOX	The primary submitted address is a P.O. Box.
SSN_RANDOM_SSA	The submitted SSN is possibly randomly issued by the SSA.
ADDRESS_MISMATCH_SECONDARY	Address mismatch on secondary address range.
NAME_MATCHES_NON_OFAC	The submitted name matches one or more of the non-OFAC global watchlist.
UNABLE_TO_VERIFY_ZIP_CODE	Unable to verify zip code.

Enumeration	Description
IP_ADDRESS_UNKNOWN	The submitted IP Address is unknown.
IP_ADDRESS_DIFFERENT_STATE	The submitted IP Address is assigned to a different State than the Bill-To state.
IP_ADDRESS_DIFFERENT_ZIP	The submitted IP Address is assigned to a different zip code than the Bill-To zip code.
IP_ADDRESS_DIFFERENT_PHONE	The submitted IP Address is assigned to a different area code than the Bill-To phone number.
IP_ADDRESS_DOMAIN_UNKNOWN	The submitted IP Address second level domain is unknown.
IP_ADDRESS_NOT_ASSIGNED_TO_USA	The submitted IP Address is not assigned to the United States.
IP_ADDRESS_NON_ROUTABLE	The submitted IP Address is non-routable over the internet.

4.28 **companyName**

The `companyName` element is an optional child of both the `lienResult` and `bankruptcyData` elements and specifies the name of the company to which the lien or bankruptcy information applies.

Type = String; **minLength** = 1; **maxLength** = 120

Parent Elements:

[bankruptcyData](#), [lienResult](#)

Attributes:

None

Child Elements:

None

4.29 contactPhone

The `contactPhone` element is an optional child of the `legalEntityCreateRequest`, `legalEntityUpdateRequest`, and the `principal` elements, as well as the `legalEntityRetrievalResponse`. It defines the contact phone number for the parent element.

IMPORTANT: The system validates the value for this element and generates an error for any of the following conditions:

- Element omitted from request
- Value less than 10 digits
- Circular numbers (e.g., 0123456789 or 3456789012)
- All the same digits

Type = String; **minLength** = 1; **maxLength** = 10

Parent Elements:

[legalEntityCreateRequest](#), [principal](#), [legalEntityUpdateRequest](#), [legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.30 countryCode

The `countryCode` element is a required child of the `address` element that defines the country of either the Legal Entity, the principal, or Sub-merchant.

IMPORTANT: The system validates the value this element when a child of the principal's `address` element and generates an error for any of the following conditions:

- Omitted from the request
- Contains a value other than USA or CAN

Type = String; minLength = 2; maxLength = 3

Parent Elements:

[address](#)

Attributes:

None

Child Elements:

None

4.31 createCredentials

The `createCredentials` element is an optional child of the `submerchantCreateRequest` element and indicates if the system should create login credentials (`username`, `password`, and `paypageId`, if necessary) for this Sub-merchant. Submit a value of **true** with each `subMerchantCreateRequest`, only if each Sub-merchant requires individual credentials for transaction submission.

Type = Boolean; **Possible Values** = true or false

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.32 credentials

The `credentials` element is an optional child of the `subMerchantCreateResponse` element and contains child elements that define the `username` and `password` for use by the sub-merchant, as well as the expiration date of the password.

Parent Elements:

[subMerchantCreateResponse](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

[username](#), [password](#), [passwordExpirationDate](#)

Example: credentials

```
<credentials>
  <userName>UserName</userName>
  <password>Password</password>
  <passwordExpirationDate>YYYY-MM-DDTHH:MM:SS+/-HH:MM</passwordExpirationDate>
</credentials>
```


4.33 customerServiceNumber

The `customerServiceNumber` element is a required child of the `subMerchantCreateRequest` element and specifies the customer service phone number of the Sub-merchant. It is also a child of the `subMerchantUpdateRequest` and the `subMerchantRetrievalResponse`.

Type = String; **minLength** = 1; **maxLength** = 13

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.34 dateOfBirth

The `dateOfBirth` element is a required child of the `principal` element and specifies the date of birth of the principal.

IMPORTANT: The system validates the value for this element and generates an error for any of the following conditions:

- Date indicates age less than 18 years
- Date indicates age greater than 125 years

Type = Date; **Format** = yyyy-mm-dd

Parent Elements:

[principal](#)

Attributes:

None

Child Elements:

None

4.35 decisionDate

The `decisionDate` element is an optional child of the `legalEntityRetrievalResponse` element. The value represents the date/time a decision was made for a Legal Entity that was in manual review. This element is returned only for Legal Entities that underwent manual review.

Type = dateTime; **Format** = YYYY-MM-DDTHH:MM:SS+/-HH:MM

NOTE: The +/-HH:MM portion of the dateTime format represents the offset from UTC time. For example, for Boston the value would be -05:00 (or -04:00 depending upon daylight savings time), meaning five hours behind UTC time.

Parent Elements:

[legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.36 description

The description element is a child of multiple elements and provides a text description of the accompanying code or score.

Type = String; **minLength** = N/A; **maxLength** = varies from 60 to 200 depending upon parent

Parent Elements:

[overallScore](#), [nameAddressTaxIdAssociation](#), [nameAddressPhoneAssociation](#), [riskIndicator](#), [nameAddressSsnAssociation](#), [businessToPrincipalAssociation](#)

Attributes:

None

Child Elements:

None

4.37 disable

The `disable` element is an optional child of the `subMerchantUpdateRequest` element and allows you to disable an existing Sub-merchant. A value of **true** indicates that you want to changes the status of the Sub-merchant to disabled. The default value is **false**.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[subMerchantUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.38 disabled

The `disabled` element is an optional child of the `subMerchantRetrievalResponse` element and indicates the status of the Sub-merchant. A value of **true** indicates that the Sub-merchant is currently disabled, while a value of **false** indicates that the Sub-merchant is enabled.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.39 discoverConveyedMid

The `discoverConveyedMid` element is an optional child of the `subMerchantCreateRequest` element and specifies the Discover Merchant Id of the Sub-merchant.

NOTE: If you have a direct relationship and are funded by Discover for Discover transaction, then you are a Discover conveyed merchant and for proper processing, must supply the merchant ID assigned to you by Discover.

Type = String; minLength = 1; maxLength = 15

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.40 dobVerified

The `dobVerified` element is an optional child of the `verificationIndicators` element, when `verificationIndicator` is a descendant of the **principal** element. A value of **true** indicates that the Date of Birth of the principal was verified, while a value of **false** indicates that the DOB could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None

4.41 doingBusinessAs

The `doingBusinessAs` element is an optional child of the `legalEntityCreateRequest` element and specifies an alternate name of the Legal Entity.

Type = String; **minLength** = 1; **maxLength** = 60

IMPORTANT: The system validates the value for this element and generates an error for any of the following conditions:

- All blanks
- Single character
- Starts with a special character
- Value = N/A
- Value = NONE
- Value = Not Applicable
- Value = Not Available
- Value = Not Accessed

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.42 driversLicense

The `driversLicense` element is an optional child of the `principal` element and specifies the driver's license number of the principal.

Type = String; **minLength** = 1; **maxLength** = 25

Parent Elements:

[principal](#)

Attributes:

None

Child Elements:

None

4.43 driversLicenseState

The `driversLicenseState` element is an optional child of the `principal` element and specifies the state that issued the driver's license of the principal.

Type = String; **minLength** = 1; **maxLength** = 2

Parent Elements:

[principal](#)

Attributes:

None

Child Elements:

None

4.44 eCheck

The eCheck element is an optional child of the subMerchantCreateRequest and contains child elements that define the eCheckCompanyName and eCheckBillingDescriptor.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

Attribute Name	Type	Required?	Description
enabled	Boolean	Yes	Defines if eCheck processing is enabled for this merchant. Valid values are either true or false .

Child Elements:

[eCheckBillingDescriptor](#), [eCheckCompanyName](#)

Example: eCheck Structure

```
<eCheck enabled="true">
  <eCheckCompanyName>ABA Company</eCheckCompanyName>
  <eCheckBillingDescriptor>9785551111</eCheckBillingDescriptor>
</eCheck>
```

4.45 eCheckBillingDescriptor

The `eCheckBillingDescriptor` element is an optional child of the `subMerchantCreateRequest`, and the `subMerchantUpdateRequest` elements. It specifies the Billing Descriptor used for eCheck Transaction. You should specify this element when the Sub-Merchant is enabled for eCheck transaction.

NOTE: Typically, you use this field to submit the company phone number. You use the `eCheckCompanyName` field to submit the company name, which is the equivalent of a Billing Descriptor on a credit card transaction.

Type = String; minLength = 1; maxLength = 10

Parent Elements:

[eCheck](#)

Attributes:

None

Child Elements:

None

4.46 eCheckCompanyName

The `eCheckCompanyName` element is an optional child of the `subMerchantCreateRequest` and the `subMerchantUpdateRequest` elements. It specifies the Company Name used for eCheck Transaction. You should specify this element when the Sub-Merchant is enabled for eCheck transaction.

Type = String; **minLength** = 1; **maxLength** = 16

Parent Elements:

[eCheck](#)

Attributes:

None

Child Elements:

None

4.47 emailAddress

The `emailAddress` element is an optional child of the `principal` element, where it specifies the email address of the principal, and a required child of the `primaryContact` element, where it specifies the email address of the Sub-merchant's primary contact.

NOTE: Although an optional child of the `principal` element, you must include this information if you process Visa transactions.

Type = String; minLength = 1; maxLength = 100

Parent Elements:

[principal](#), [primaryContact](#)

Attributes:

None

Child Elements:

None

4.48 error

The `error` element is a child of the `errors` element and is a text description of the error preventing the processing of the transaction.

Type = String; **minLength** = N/A; **maxLength** = 512

Parent Elements:

[errors](#)

Attributes:

None

Child Elements:

None

4.49 errorResponse

The `errorResponse` element is the parent element for the XML message returned by the platform for a transaction that the system cannot process due to a validation, authentication, or communication error.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

[transactionId](#), [errors](#)

4.50 errors

The `errors` element is a child of the `errorResponse` element and through its child, `error`, provides a text description of the error preventing the processing of the transaction.

Parent Elements:

[errorResponse](#)

Attributes:

None

Child Elements:

[error](#)

4.51 feeProfile

The `feeProfile` element is an optional child of the `subMerchantFunding` element and defines the Fee Profile used for Sub-merchant fund disbursements using Managed Payout.

Type = String; minLength = 1; maxLength = 150

NOTE: You must create the Fee Profiles using the PayFac Portal.

Parent Elements:

[subMerchantFunding](#)

Attributes:

None

Child Elements:

None

4.52 filingDate

The `filingDate` element is an optional child of both the `bankruptcyData` element and the `lienResult` element. It specifies the date of either the most recent lien or most recent bankruptcy filing, depending upon where used.

Type = Date; **Format** = yyyy-mm-dd

Parent Elements:

[bankruptcyData](#), [lienResult](#)

Attributes:

None

Child Elements:

None

4.53 firstName

The `firstName` element is a required child of both the `principal` element, where it specifies the first name of the principal, and the `primaryContact` element, where it specifies the first name of the Sub-merchant's primary contact.

Type = String; minLength = 1; maxLength = 20

IMPORTANT: The system validates the value for this element as a child of `principal` and generates an error if it is an empty string:

Parent Elements:

[principal](#), [primaryContact](#), [legalEntityPrincipalCreateResponse](#)

Attributes:

None

Child Elements:

None

4.54 fraud

The `fraud` element is an optional child of both the `subMerchantCreateRequest` and the `subMerchantUpdateRequest`. It defines whether FraudSight and fraud filters are enabled for the Sub-merchant.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

Attribute Name	Type	Required?	Description
enabled	Boolean	Yes	Defines if fraud FraudSight filters are enabled for this Sub-merchant. Valid values are either true or false .

Child Elements:

None

4.55 fundingSubmerchantId

The `fundingSubmerchantId` element is an optional child of the `subMerchantFunding` element (required if you use Dynamic Payout) and specifies the funding Id used to identify the Sub-merchant in funding instructions. (Also see, [Retrieve Sub-Merchant](#) on page 64.)

NOTE: If you are processing transactions on both the Worldpay Core and Worldpay eCommerce platforms, submit the Sub-merchant Id provided for use on the Worldpay Core platform.

If you are processing transactions only on the Worldpay eCommerce platform, submit a value of `AUTO_GENERATE`. To retrieve the `fundingSubmerchantId` value for use in Funding Instructions, submit a Sub-merchant Retrieval Request. (Please refer to the *Worldpay eComm cnpAPI Reference Guide* for additional information about Funding Instructions.)

Type = String; minLength = 1; maxLength = 32

Parent Elements:

[subMerchantFunding](#)

Attributes:

None

Child Elements:

None

4.56 hardCodedBillingDescriptor

The `hardCodedBillingDescriptor` element is a required child of the `subMerchantCreateRequest` element and specifies the Billing descriptor that will be hard-coded into the profile of the Sub-merchant. This default value appears on the customer's billing statement unless overridden by the submission of a soft billing descriptor in the Authorization/Sale transaction.

NOTE: If Worldpay configures a forced prefix for you, the `hardCodedBillingDescriptor` value you submit for the Sub-merchant must include the prefix.

Type = String; minLength = 1; maxLength = 25

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.57 hasAcceptedCreditCards

The `hasAcceptedCreditCards` element is a required child of the `legalEntityCreateRequest` element and indicates if this Legal Entity has accepted credit cards in the past.

Type = Boolean; **Possible Values** = true or false

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityRetrievalResponse](#), [legalEntityUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.58 language

The `language` element is an optional child of several transaction types. You use this element to specify the language of the SDK you use to create your transactions.

Type = String; **minLength** = 1; **maxLength** = 60

Parent Elements:

[legalEntityAgreementCreateRequest](#), [legalEntityCreateRequest](#), [legalEntityPrincipalCreateRequest](#), [subMerchantCreateRequest](#)

Attributes:

None

Child Elements:

None

4.59 lastName

The `lastName` element is a required child of both the `principal` element, where it specifies the last name (surname) of the principal, and the `primaryContact` element, where it specifies the last name (surname) of the Sub-merchant's primary contact.

IMPORTANT: The system validates the value for this element as a child of `principal` and generates an error if it is an empty string:

Type = String; minLength = 1; maxLength = 20

Parent Elements:

[principal](#), [primaryContact](#), [legalEntityPrincipalCreateResponse](#)

Attributes:

None

Child Elements:

None

4.60 legalEntityAgreement

The `legalEntityAgreement` element is a required child of the `legalEntityAgreementCreateRequest` and contains child elements that provide information about the Legal Entity Agreement. It is also an optional child of the `agreements` element, where it provides information about agreements associated with the designated Legal Entity in a Legal Entity Agreement Retrieval request. You should use this transaction type only if your PayFac Account Manager directs you to do so.

Parent Elements:

`legalEntityAgreementCreateRequest`, `agreements`

Attributes:

None

Child Elements:

Required: `legalEntityAgreementType`, `agreementVersion`, `userFullName`, `userSystemName`, `acceptanceDateTime`

Optional: `userIPAddress`, `manuallyEntered`,

Example: legalEntityAgreement Structure

```
<legalEntityAgreement>
  <legalEntityAgreementType>MERCHANT_AGREEMENT</legalEntityAgreementType>
  <agreementVersion>Agreement Version Number</agreementVersion>
  <userFullName>Full Name of Signer</userFullName>
  <userSystemName>User Name of Signer of PayFac System</userSystemName>
  <userIPAddress>IP Address of Signer's system</userIPAddress>
  <manuallyEntered>>true or false</manuallyEntered>
  <acceptanceDateTime>Date and Time Agreement Signed</acceptanceDateTime>
</legalEntityAgreement>
```

4.61 legalEntityAgreementCreateRequest

The `legalEntityAgreementCreateRequest` element is the parent element for the XML message used to create a Legal Entity Agreement. You should use this transaction type only if your PayFac Account Manager directs you to do so.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

Required: [legalEntityAgreement](#)

Optional: [language](#), [sdkVersion](#)

4.62 legalEntityAgreementCreateResponse

The `legalEntityAgreementCreateResponse` element is the parent element for the XML message returned by the platform in response to a successful (or duplicate) `legalEntityAgreementCreateRequest` message.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50
duplicate	Boolean	No	Appears in the response message only if the <code>legalEntityAgreementCreateRequest</code> was a duplicate request. Allowed values = true or false

Child Elements:

Required: [transactionId](#)

4.63 legalEntityAgreementRetrievalResponse

The `legalEntityAgreementRetrievalResponse` element is the parent element for the XML message returned by the platform in response to a Legal Entity Agreement Retrieval request.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: http://payfac.vantivcnp.com/api/merchant/onboard minLength = N/A maxLength = 50

Child Elements:

[legalEntityId](#), [transactionId](#), [agreements](#)

4.64 legalEntityAgreementType

The `legalEntityAgreementType` element is a required child of the `legalEntityAgreement` element and defines the type of Legal Entity Agreement. At this time, the only valid value is **MERCHANT_AGREEMENT**.

Type = String (Enum); minLength = N/A; maxLength = N/A

Parent Elements:

[legalEntityAgreement](#)

Attributes:

None

Child Elements:

None

4.65 legalEntityCreateRequest

The `legalEntityCreateRequest` element is the parent element for the XML message used to create a Legal Entity. You must create a Legal Entity prior to adding Sub-merchants controlled by the entity.

NOTE: When creating a Legal Entity, you must define the controlling Principal of the Legal Entity. Use the `legalEntityPrincipalCreateRequest` (see Create [Create a Principal](#) on page 49) to add all other Principal with a 10% or greater ownership of the Legal Entity.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

Always Required: [legalEntityName](#), [legalEntityType](#), [taxId](#), [annualCreditCardSalesVolume](#), [hasAcceptedCreditCards](#), [address](#) (some child elements may be optional), [principal](#)

Required/Optional (depending upon if using PayFac Assurance model): [yearsInBusiness](#)

Optional: [doingBusinessAs](#), [contactPhone](#), [language](#), [sdkVersion](#)

4.66 legalEntityCreateResponse

The `legalEntityResponse` element is the parent element for the XML message returned by the platform in response to a `legalEntityCreateRequest` message.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50
duplicate	Boolean	No	Appears in the response message only if the <code>legalEntityCreateRequest</code> was a duplicate request. Allowed values = true or false

Child Elements:

Always Required: [transactionId](#)

Optional: [legalEntityId](#), [pspMerchantId](#), [responseCode](#), [responseDescription](#), [backgroundCheckResults](#), [originalSubMerchant](#)

4.67 legalEntityId

The `legalEntityId` element is a required child of the `legalEntityResponse` element and is a system generated identifier for the Legal Entity.

Type = String; **minLength** = 1; **maxLength** = 19

Parent Elements:

[legalEntityResponse](#), [legalEntityRetrievalResponse](#), [legalEntityResponse](#)

Attributes:

None

Child Elements:

None

4.68 legalEntityName

The `legalEntityName` element is a required child of the `legalEntityCreateRequest` element and defines the name of the Legal Entity controlling the Sub-merchants.

Type = String; **minLength** = 1; **maxLength** = 60

IMPORTANT: The system validates the value for this element and generates an error for any of the following conditions:

- All blanks
- Single character
- Starts with a special character
- Value = N/A
- Value = NONE
- Value = Not Applicable
- Value = Not Available
- Value = Not Accessed

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.69 legalEntityOwnershipType

The `legalEntityOwnershipType` element is a required child of the `legalEntityCreateRequest` and the `legalEntityUpdateRequest` where it defines whether the Legal Entity is Public or Private.

Type = String (Enum); **Valid Values** = PUBLIC or PRIVATE

NOTE: If the `legalEntityType` is either `TAX_EXEMPT_ORGANIZATION` or `GOVERNMENT_AGENCY`, you must set the `legalEntityOwnershipType` to `PUBLIC`.

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.70 legalEntityPrincipalCreateRequest

The `legalEntityPrincipalCreateRequest` element is the parent element for the XML message used to create a Legal Entity Principal. You must create a Principal record for each individual holding a 10% or greater stake in the Legal Entity.

NOTE: When creating a Legal Entity, you must define the controlling Principal of the Legal Entity. If the `legalEntityType` is `SOLE_PROPRIETORSHIP`, you cannot add or delete Principals.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

Required: [principal](#)

Optional: [language](#), [sdkVersion](#)

4.71 legalEntityPrincipalCreateResponse

The `legalEntityPrincipalCreateResponse` element is the parent element for the XML message returned by the platform in response to a Legal Entity Principal Create Request.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50
duplicate	String	No	Appears in the response message only if the <code>legalEntityUpdateRequest</code> was a duplicate request. Allowed values = true or false

Child Elements:

[transactionId](#), [principalId](#), [firstName](#), [lastName](#), [backgroundCheckResults](#)

4.72 legalEntityPrincipalDeleteResponse

The legalEntityPrincipalDeleteResponse is the parent element for the XML message returned by the platform in response to a Legal Entity Principal Delete request.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: http://payfac.vantivcnp.com/api/merchant/onboard minLength = N/A maxLength = 50

Child Elements:

[transactionId](#), [legalEntityId](#), [principalId](#), [responseDescription](#)

4.73 legalEntityResponse

The `legalEntityResponse` element is the parent element for the XML message returned by the platform in response to a Legal Entity Update request.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50
duplicate	String	No	Appears in the response message only if the <code>legalEntityUpdateRequest</code> was a duplicate request. Allowed values = true or false

Child Elements:

[transactionId](#), [legalEntityId](#), [responseCode](#), [responseDescription](#), [backgroundCheckResults](#)

4.74 legalEntityRetrievalResponse

The `legalEntityRetrievalResponse` element is the parent element for the XML message returned by the platform in response to a Legal Entity retrieval request.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50
overallStatus	String	Yes	Defines the overall status of the Legal Entity. minLength = 1 maxLength = 100

Child Elements:

[legalEntityName](#), [legalEntityType](#), [taxId](#), [annualCreditCardSalesVolume](#), [hasAcceptedCreditCards](#), [address](#), [legalEntityId](#), [responseCode](#), [responseDescription](#), [backgroundCheckResults](#), [transactionId](#), [updateDate](#), [decisionDate](#), [tinValidationStatus](#), [sub_merchant_processing_status](#)

4.75 legalEntityType

The `legalEntityType` element is a required child of the `legalEntityCreateRequest` element and defines the business type of the Legal Entity.

Type = String (enum); **minLength** = N/A; **maxLength** = N/A

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

None

Enumerations:

Enumeration
INDIVIDUAL_SOLE_PROPRIETORSHIP
CORPORATION
LIMITED_LIABILITY_COMPANY
PARTNERSHIP
LIMITED_PARTNERSHIP
GENERAL_PARTNERSHIP
TAX_EXEMPT_ORGANIZATION
GOVERNMENT_AGENCY

NOTE: All Legal Entity Type are available for use by Canadian based Legal Entities; however, LIMITED_PARTNERSHIP and GENERAL_PARTNERSHIP will be deprecated in a future release, so you should avoid their use.

4.76 legalEntityUpdateRequest

The `legalEntityUpdateRequest` element is the parent element for the XML message used to update a Legal Entity. Using this transaction type, you can update the following Legal Entity items:

- `streetAddress1` (entity and/or principal)
- `streetAddress2` (entity and/or principal)
- `city` (entity and/or principal)
- `stateProvince` (entity and/or principal)
- `postalCode` (entity and/or principal)
- `doingBusinessAs`
- `annualCreditCardSalesVolume`
- `hasAcceptedCreditCards`
- `firstName` (principal)
- `lastName` (principal)
- `ssn` (principal)
- `dateOfBirth` (principal)
- `driversLicense` (principal)
- `driversLicenseState` (principal)
- `legalEntityName`
- `legalEntityType`
- `taxId`

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
<code>xmlns</code>	String	Yes	Defines the URI of the schema definition. This is a fixed location and you must specify it as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

Optional: [address](#), [contactPhone](#), [doingBusinessAs](#), [annualCreditCardSalesVolume](#), [hasAcceptedCreditCards](#), [principal](#), [backgroundCheckFields](#)

4.77 lienResult

The `lienResult` element is an optional child of the `backgroundCheckResults` element. It contains child elements that provides information about the lien history of the company from the background checks performed by us.

Parent Elements:

[backgroundCheckResults](#)

Attributes:

None

Child Elements:

[lienType](#), [releasedCount](#), [unreleasedCount](#), [companyName](#), [streetAddress1](#), [streetAddress2](#), [city](#), [state](#), [zip](#), [zip4](#), [filingDate](#)

Example: lienResult Structure

```
<lienResult>
  <lienType>Subtype of Lien</lienType>
  <releasedCount>2</releasedCount>
  <unreleasedCount>1</unreleasedCount>
  <companyName>Company Name</companyName>
  <streetAddress1>100 Main Street</streetAddress1>
  <streetAddress2>Suite 2</streetAddress2>
  <city>Boston</city>
  <state>MA</state>
  <zip>01150</zip>
  <zip4>2202</zip4>
  <filingDate>2011-05-13</filingDate>
</lienResult>
```

4.78 lienType

The `lienType` element is an optional child of the `lienResult` element and specifies the sub-type of lien discovered during the background check process.

Type = String; **minLength** = 1; **maxLength** = 50

Parent Elements:

[lienResult](#)

Attributes:

None

Child Elements:

None

4.79 manuallyEntered

The `manuallyEntered` element is a required child of the `legalEntityAgreement` element and defines whether information about the party signing the Legal Entity Agreement was entered manually or electronically. When this element is set to **false**, you must include a value for the `userIPAddress` element. When this element is set to **true**, the `userIPAddress` element is optional.

Type = boolean; **Allowed Values** = true or false

Parent Elements:

[legalEntityAgreement](#)

Attributes:

None

Child Elements:

None

4.80 maxTransactionAmount

The `maxTransactionAmount` element is a required child of the `subMerchantCreateRequest` element and specifies the maximum transaction amount (in the purchase currency) allowed on a single transaction submitted by the Sub-merchant. Supply the value in dollars without a decimal point. For example, a value of 50000 signifies \$50,000.

Type = Long; **minLength** = N/A; **maxLength** = 12 (See Note below.)

IMPORTANT: Although the schema specifies a `maxLength` of 12, Worldpay appends two digits to the end of the value you submit to represent cents. So, the value you submit cannot exceed 10 digits.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.81 merchantCategoryCode

The `merchantCategoryCode` element is a required child of the `subMerchantCreateRequest` element and specifies the Merchant Category Code of the Sub-merchant.

Type = String; minLength = 1; maxLength = 4

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.82 merchantCategoryTypes

The `merchantCategoryTypes` element is an optional child of the `subMerchantCreateRequest`, `subMerchantUpdateRequest`, and `subMerchantCreateRequest`. It contains a single child element that defines the category of the `subMerchant`.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

[categoryType](#)

Example: merchantCategoryTypes Structure

```
<merchantCategoryTypes>
  <categoryType>SM</categoryType>
  .
  .
  .
  <categoryType>GC</categoryType>
</merchantCategoryTypes>
```

4.83 merchantIdentString

The `merchantIdentString` element is a required child of the `subMerchantCreateResponse` element and is a system generated merchant identifier required to process transactions for this Sub-merchant. It is also returned as a child of both the `originalSubMerchant` and `subMerchantRetrievalResponse` elements.

NOTE: This value is the unique string used to identify the merchant when submitting payment transactions to our system. In the `cnpAPI` used for payment transactions, it is the `merchantId` attribute used in the `batchRequest`, `batchResponse`, and `cnpOnlineRequest`.

Type = String; minLength = 1; maxLength = 50

Parent Elements:

[subMerchantCreateResponse](#), [originalSubMerchant](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.84 merchantName

The `merchantName` element is a required child of the `subMerchantCreateRequest` element and specifies the name of the Sub-merchant.

Type = String; minLength = 1; maxLength = 50

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.85 method

The `method` element is a required child of the `methodOfPayments` element. It contains a child elements that define the allowed methods of payment and transaction types for the Sub-merchant. This element can occur an unlimited number of times in the request message.

Parent Elements:

[methodOfPayments](#)

Attributes:

None

Child Elements:

[paymentType](#), [allowedTransactionType](#), [selectedTransactionType](#)

Example: methodStructure

```
<method>
  <paymentType>MASTERCARD</paymentType>
  <selectedTransactionType>REFUNDS_ONLY</selectedTransactionType>.
  <allowedTransactionType>NONE, REFUNDS_ONLY, DEPOSITS_ONLY,
DEPOSITS_AND_REFUNDS</allowedTransactionType>
</method>
```

4.86 methodOfPayments

The `merchantCategoryTypes` element is an optional child of the `subMerchantCreateRequest`, `subMerchantUpdateRequest`, and `subMerchantCreateRequest`. It contains a single child element that defines the category of the subMerchant.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

[method](#)

Example: methodOfPayment Structure

```
<meethodOfPayments>
  <method>
    <paymentType>VISA</paymentType>
    <selectedTransactionType>DEPOSIT_ONLY</selectedTransactionType>
    <allowedTransactionType>NONE, REFUNDS_ONLY, DEPOSITS_ONLY,
    DEPOSITS_AND_REFUNDS<</allowedTransactionType>
  </method>
</meethodOfPayments>
```

4.87 nameAddressPhoneAssociation

The `nameAddressPhoneAssociation` element is an optional child of the `verificationResult` element and contains child elements providing the results of background checks performed on the Legal Entity that indicate how tightly coupled the name is to the phone number and address provided.

Parent Elements:

[verificationResult](#)

Attributes:

None

Child Elements:

[code](#), [description](#)

Example: nameAddressPhoneAssociation Structure

```
<nameAddressPhoneAssociation>
  <code>Name_Address_Phone_info</code>
  <description>Text Description of Code</description>
</nameAddressPhoneAssociation>
```

4.88 nameAddressSsnAssociation

The `nameaddressSsnAssociation` element is an optional child of the `verificationResult` element and contains child elements providing the results of background checks performed on the Legal Entity that indicate how tightly coupled the name is to the SSN and address provided.

Parent Elements:

`verificationResult`

Attributes:

None

Child Elements:

`code`, `description`

Example: nameAddressTaxIdAssociation Structure

```
<nameAddressSsnAssociation>
  <code>Name_Address_SSN_info</code>
  <description>Text Description of Code</description>
</nameAddressSsnAssociation>
```


4.89 nameAddressTaxIdAssociation

The `nameaddressTaxIdAssociation` element is an optional child of the `verificationResult` element and contains child elements providing the results of background checks performed on the Legal Entity that indicate how tightly coupled the name is to the Tax Id and address provided.

Parent Elements:

[verificationResult](#)

Attributes:

None

Child Elements:

[code](#), [description](#)

Example: nameAddressTaxIdAssociation Structure

```
<nameAddressTaxIdAssociation>
  <code>Name_Address_TIN_info</code>
  <description>Text Description of Code</description>
</nameAddressTaxIdAssociation>
```

4.90 nameVerified

The `nameVerified` element is an optional child of the `verificationIndicators` element. A value of **true** indicates that the name of the principal or business was verified, while a value of **false** indicates that the name could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None

4.91 originalLegalEntityId

The `originalLegalEntityId` element is an optional child of the `legalEntityCreateResponse`, returned when the `legalEntityCreateRequest` is a duplicate. The value indicates the Legal Entity ID of the original Legal Entity.

Type = String; minLength = 1; maxLength = 19

Parent Elements:

[legalEntityCreateResponse](#)

Attributes:

None

Child Elements:

None

4.92 originalLegalEntityStatus

The `originalLegalEntityStatus` element is an optional child of the `legalEntityCreateResponse`, returned when the `legalEntityCreateRequest` is a duplicate. The value indicates the status of the Legal Entity.

Type = String; **minLength** = 1; **maxLength** = 100

Parent Elements:

[legalEntityCreateResponse](#)

Attributes:

None

Child Elements:

None

4.93 originalSubMerchant

The `originalSubMerchant` element is optional child of the `subMerchantCreateResponse` message. This element and its children are returned only if the system has determined the `subMerchantCreateRequest` is a duplicate and provides the information from the creation of the original Sub-merchant.

Parent Elements:

[subMerchantCreateResponse](#)

Attributes:

None

Child Elements:

[address](#), [disabled](#), [bankAccountNumber](#), [bankRoutingNumber](#), [customerServiceNumber](#), [amexMid](#), [discoverConveyedMid](#), [hardCodedBillingDescriptor](#), [maxTransactionAmount](#), [merchantCategoryCode](#), [merchantName](#), [url](#), [subMerchantId](#), [transactionId](#), [merchantIdentString](#)

4.94 overallScore

The `overallScore` element is an optional child of the `verificationResult` element and contains child elements providing the results of background checks performed on the Legal Entity.

Parent Elements:

[verificationResult](#)

Attributes:

None

Child Elements:

[score](#), [description](#)

Example: overallScore Structure

```
<overallScore>
  <score>Overall results for Business</score>
  <description>Text Description of Score</description>
</overallScore>
```

4.95 password

The `password` element is a required child of the `credentials` element and specifies the password portion of the authentication credentials used to submit transaction to the production environment.

Type = String; **minLength** = 1; **maxLength** = 72

Parent Elements:

[credentials](#)

Attributes:

None

Child Elements:

None

4.96 passwordExpirationDate

The `passwordExpirationDate` is an optional of the `credentials` element that specifies the expiration date of the provided password.

Type = `dateTime`; **Format** = `YYYY-MM-DDTHH:MM:SS+/-HH:MM`

NOTE: The `+/-HH:MM` portion of the `dateTime` format represents the offset from UTC time. For example, for Boston the value would be `-05:00`, meaning five hours behind UTC time.

Parent Elements:

[credentials](#)

Attributes:

None

Child Elements:

None

4.97 paymentType

The `paymentType` element is a required child of the `method` element and specifies the payment type to which the `selectedTransactionType` element applies. Possible values are: AMERICAN_EXPRESS, DISCOVER, MASTERCARD, and VISA.

NOTE: Although the schema does not present this element as an enumeration, the values listed above are the only allowed values.

Type = String; minLength = N/A; maxLength = N/A

Parent Elements:

[method](#)

Attributes:

None

Child Elements:

None

4.98 paypageCredential

The `paypageCredential` element is a required child of the `paypageCredentials` element and contains child elements that define the `paypageId` and associated `userName` used to submit card info via the PayPage application.

Parent Elements:

[paypageCredentials](#)

Attributes:

None

Child Elements (required):

[username](#), [paypageId](#)

Example: paypageCredential Structure

```
<paypageCredentials>
  <userName>UserName</userName>
  <paypageId>Asd23thI974Jpk32</paypageId>
</paypageCredentials>
```

4.99 **paypageCredentials**

The `paypageCredentials` element is an optional child of the `subMerchantCreateResponse` and `subMerchantRetrievalResponse` elements and contains child elements that define the `paypageId` and associated `userName` used to submit card info via the PayPage application.

Parent Elements:

[subMerchantCreateResponse](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements (required):

[paypageCredential](#)

4.100 paypageId

The `paypageId` element is an optional child of the `paypageCredential` element and specifies the PayPage identifier used to submit PayPage transactions to the production environment. The system returns a `paypageId` only if the Sub-merchant uses the Vault/PayPage feature and you set the `createCredentials` element to true in the create request.

Type = String; **minLength** = 1; **maxLength** = 50

Parent Elements:

[paypageCredential](#)

Attributes:

None

Child Elements:

None

4.101 phone

The `phone` element is a required child of the `primaryContact` element. It defines the phone number for the Sub-merchant's primary contact.

Type = String; **minLength** = 1; **maxLength** = 13

Parent Elements:

[primaryContact](#)

Attributes:

None

Child Elements:

None

4.102 phoneVerified

The `phoneVerified` element is an optional child of the `verificationIndicators` element. A value of **true** indicates that the phone number (of the business) was verified, while a value of **false** indicates that the phone number could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None

4.103 postalCode

Depending upon where used, this is either the postal code of the Legal Entity controlling the Sub-merchant or of the principal, or of the Sub-merchant. This `postalCode` element is always required for a Legal Entity and for a principal if the Legal Entity is a Sole Proprietorship (`legalEntityType`).

IMPORTANT: The system validates the value this element when a child of the principal's address element and generates an error for any of the following conditions:

- Omitted from the request
- Empty or spaces

Type = String; minLength = 1; maxLength = 7

Parent Elements:

[address](#)

Attributes:

None

Child Elements:

None

4.104 primaryContact

The `primaryContact` element is an optional child of both the `subMerchantCreateRequest` and the `subMerchantUpdateRequest` transactions. The children of this element specify information about the primary contact of the Sub-merchant.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements (all required):

[firstName](#), [lastName](#), [phone](#), [emailAddress](#)

Example: primaryContact

```
<primaryContact>
  <firstName>John</firstName>
  <lastName>Doe</lastName>
  <emailAddress>John.Doe@company.com</emailAddress>
  <phone>9785552222</phone>
</primaryContact>
```


4.105 principal

The `principal` element has multiple uses in the schema. In two instances it is the parent for the child elements used to provide information about the Legal Entity principal owners/officers. Its structure changes based upon whether it is part of a `legalEntityCreateRequest`, `legalEntityUpdateRequest`, `legalEntityPrincipalCreateRequest`, or a `legalEntityResponse`. It is also a child of the `backgroundCheckResults` element.

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityCreateResponse](#), [legalEntityUpdateRequest](#), [backgroundCheckResults](#), [legalEntityPrincipalCreateRequest](#),

Attributes:

None

Child Elements (when used in `legalEntityCreateRequest` or `legalEntityPrincipalCreateRequest`):

NOTE: Although part of the schema structure, the `principalId` element is not used in a `legalEntityCreateRequest` message.

Several of the elements listed below are optional in the schema, but now required per regulations.

Required: [firstName](#), [lastName](#), [ssn](#), [address](#), [dateOfBirth](#), [stakePercent](#)

Optional: [emailAddress](#), [contactPhone](#), [driversLicense](#), [driversLicenseState](#), [title](#)

Example: principal Structure when used in `legalEntityCreateRequest` and `legalEntityPrincipalCreateRequest`

```
<principal>
  <title>Chief Financial Officer</title>
  <firstName>John</firstName>
  <lastName>Doe</lastName>
  <emailAddress>jdoe@mail.net</emailAddress>
  <ssn>012345678</ssn>
  <contactPhone>9785551234</contactPhone>
  <dateOfBirth>1958-12-12</dateOfBirth>
  <driversLicense>S123456789</driversLicense>
  <driversLicenseState>MA</driversLicenseState>
  <address>
    <streetAddress1>100 Main Street</streetAddress1>
    <streetAddress2>Suite 400</streetAddress2>
    <city>Lowell</city>
```

```

    <stateProvince>MA</stateProvince>
    <postalCode>01852</postalCode>
    <countryCode>USA</countryCode>
  </address>
  <stakePercent>25%</stakePercent>
</principal>

```

Child Elements (when used in legalEntityCreateResponse):

[principalId](#), [firstName](#), [lastName](#), [responseCode](#), [responseDescription](#), [backgroundCheckResults](#)

Example: principal Structure when used in a legalEntityCreateResponse

```

<principal>
  <principalId>1234567890</principalId>
  <firstName>John</firstName>
  <lastName>Doe</lastName>
  <backgroundCheckResults>
    <business>
      <verificationResult>
        <overallScore>
          <score>50</score>
          <description>Business verified on multiple sources - no contradictory
findings</description>
        </overallScore>
      <nameAddressTaxIdAssociation/>
      <nameAddressPhoneAssociation/>
      <verificationIndicators>
        <nameVerified>>false</nameVerified>
        <addressVerified>>false</addressVerified>
        <cityVerified>>false</cityVerified>
        <stateVerified>>false</stateVerified>
        <zipVerified>>false</zipVerified>
        <phoneVerified>>false</phoneVerified>
        <taxIdVerified>>false</taxIdVerified>
      </verificationIndicators>
      <riskIndicators/>
    </verificationResult>
  </business>

```

```

<principal>
  <verificationResult>
    <overallScore>
      <score>50</score>
      <description>Full name, address, phone , SSN verified</description>
    </overallScore>
    <nameAddressSsnAssociation/>
    <nameAddressPhoneAssociation/>
    <verificationIndicators>
      <nameVerified>false</nameVerified>
      <addressVerified>false</addressVerified>
      <phoneVerified>false</phoneVerified>
      <ssnVerified>false</ssnVerified>
      <dobVerified>false</dobVerified>
    </verificationIndicators>
    <riskIndicators/>
  </verificationResult>
</principal>
<businessToPrincipalAssociation>
  <score>50</score>
  <description>Association found between the person and the company in the Company
  Contacts data</description>
</businessToPrincipalAssociation>
  <bankruptcyData>
    <bankruptcyType>btype</bankruptcyType>
    <bankruptcyCount>3</bankruptcyCount>
    <companyName>testCompanyName</companyName>
    <streetAddress1>testStreetAddress1</streetAddress1>
    <streetAddress2>testStreetAddress2</streetAddress2>
    <city>testCity</city>
    <state>ST</state>
    <zip>bZip5</zip>
    <zip4>Zip4</zip4>
    <filingDate>1999-11-05</filingDate>
  </bankruptcyData>
<lienResult>

```

```

    <lienType>ltype</lienType>
    <releasedCount>3</releasedCount>
    <companyName>testLienCompanyName</companyName>
    <streetAddress1>testLienStreetAddress1</streetAddress1>
    <streetAddress2>testLienStreetAddress2</streetAddress2>
    <city>testLienCity</city>
    <state>ST</state>
    <zip>bZip5</zip>
    <zip4>Zip4</zip4>
    <filingDate>1999-11-05</filingDate>
  </lienResult>
</backgroundCheckResults>
</principal>

```

Example: principal Structure when used in legalEntityUpdateRequest

```

<principal>
  <principalId>4</principalId>
  <title>CFO</title>
  <emailAddress>jdoe@mail.net</emailAddress>
  <contactPhone>9785551234</contactPhone>
  <address>
    <streetAddress1>100 Main Street</streetAddress1>
    <streetAddress2>Suite 400</streetAddress2>
    <city>Lowell</city>
    <stateProvince>MA</stateProvince>
    <postalCode>01852</postalCode>
    <countryCode>USA</countryCode>
  </address>
  <stakePercent>33</stakePercent>
  <backgroundCheckFields>
    <firstName>John</firstName>
    <lastName>Doe</lastName>
    <ssn>012345678</ssn>
    <dateOfBirth>1958-12-12</dateOfBirth>
    <driversLicense>S123456789</driversLicense>
    <driversLicenseState>MA</driversLicenseState>
  </backgroundCheckFields>
</principal>

```

```
<backgrgroundCheckFields>  
</principal>
```

4.106 principalId

The `principalId` element is a required child of the `principal` element, when used in a `legalEntityCreateResponse` message. It is a system generated identifier for the principal/owner.

NOTE: Although part of the schema structure, this element is not used in a `legalEntityCreateRequest` message.

Type = Integer; minLength = N/A; maxLength = 10

Parent Elements:

[principal](#), [legalEntityPrincipalCreateResponse](#)

Attributes:

None

Child Elements:

None

4.107 pspMerchantId

The `pspMerchantId` element is a required child of the `subMerchantCreateRequest` element and is the identifier string you use to identify the Sub-merchant within the your systems.

Type = String; minLength = 1; maxLength = 32

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantRetrievalResponse](#), [subMerchantUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.108 purchaseCurrency

The `purchaseCurrency` element is an optional child of the `subMerchantCreateRequest` element and defines the purchase currency of transactions from this Sub-merchant. If this element is not included in the create request, the purchase currency value defaults to the value defined in the Sub-merchant template used to provision other Sub-merchants associated with this Legal Entity. When included in the create request, the `purchaseCurrency` element is also returned in the Sub-merchant retrieval request and the Sub-merchant create response if the create request was a duplicate.

Type = String; **minLength** = 3; **maxLength** = 3

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantRetrievalResponse](#), [subMerchantCreateResponse](#) (if duplicate), [subMerchantUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.109 releasedCount

The `releasedCount` element is an optional child of the `lienResult` element and specifies the count of released lien records found.

Type = int; **totalDigits** = N/A

Parent Elements:

[lienResult](#)

Attributes:

None

Child Elements:

None

4.110 response

The response element is the parent of the XML message acknowledging the receipt of a Legal Entity Update (`legalEntityUpdateRequest`), Sub-merchant update (`subMerchantUpdateRequest`), or Disable Sub-merchant message.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and must be specified as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

[transactionId](#)

4.111 responseCode

The `responseCode` element is an optional child of the `legalEntityResponse` message. The code indicate either success or the reason for the failure of the request. Possible values are listed in the table below.

Type = String; **minLength** = N/A; **maxLength** = 2

Parent Elements:

[legalEntityResponse](#), [legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

None

Possible Values:

Code	responseDescription
10	Approved
20	Manual Review
30	Retry
35	Manual Review - Duplicate
36	Duplicate
40	Declined
98	Manual Review - End Point Down
99	Manual Review - Background Check Error

NOTE: If you receive a responseCode 30 - Retry, the decision notes will contain additional details about the information that you should provide/correct on the retry.

4.112 responseDescription

The `responseDescription` element is an optional child of the `legalEntityResponse` message and is a text description of the `responseCode`.

Type = String; **minLength** = 1; **maxLength** = 100

Parent Elements:

[legalEntityResponse](#), [legalEntityRetrievalResponse](#), [legalEntityResponse](#)

Attributes:

None

Child Elements:

None

Possible Values:

responseDescription	Code
Approved	10
Manual Review	20
Retry	30
Manual Review - Duplicate	35
Duplicate	36
Declined	40
Manual Review - Background Check Error	99

NOTE: If you receive a `responseCode` 30 - Retry, the decision notes will contain additional details about the information that you should provide/correct on the retry.

4.113 riskIndicator

The `verificationResult` element is an optional child of the `business` and `principal` elements and contains child elements providing the results of background checks performed on the Legal Entity.

Parent Elements:

[riskIndicators](#)

Attributes:

None

Child Elements:

[code](#), [description](#)

Example: riskIndicator Structure

```
<riskIndicator>
  <code>Risk Indicator Info</code>
  <description>Text Description of Code</description>
</riskIndicator>
```

4.114 riskIndicators

The `riskIndicators` element is an optional child of the `verificationResult` element and contains child elements providing the results of background checks performed on the Legal Entity.

Parent Elements:

[verificationResult](#)

Attributes:

None

Child Elements:

[riskIndicator](#)

Example: riskIndicators Structure

```
<riskIndicators>
  <riskIndicator>
    <code>Risk Indicator Info</code>
    <description>Text Description of Code</description>
  </riskIndicator>
</riskIndicators>
```

4.115 score

Depending upon where used, this element defines overall score assigned based on the background checks of either the business, the principal, or the business-to-principal association.

Type = String (Enum); **minLength** = N/A; **maxLength** = N/A

Parent Elements:

[overallScore](#), [businessToPrincipalAssociation](#)

Attributes:

None

Child Elements:

None

Enumerations: (Higher number is better.)

Enums	Definition when Descendant of business	Definition when Descendant of principal	Definition when Descendant of businessToPrincipalAssociation
0	Nothing found to confirm existence of business.	Nothing verified - ID elements not found or are associated with a different person.	No information found to link Principal to Business
10	One or more of the following: <ul style="list-style-type: none"> Significant contradictory findings OFAC match exists Input address and phone are invalid 	One or more of the following: <ul style="list-style-type: none"> Critical ID elements not verified or are associated with a different person OFAC matches deceased/invalid SSNs SSN issued prior to DOB records with invalid addresses and phones 	Principal's verified name partially matches input Business name.
20	Partial verification of the input data; the business may exist, but cannot be positively confirmed.	Minimal verifications; critical ID elements not verified or are associated with a different person	Principal's verified address matches input Business address.

Enums	Definition when Descendant of business	Definition when Descendant of principal	Definition when Descendant of businessToPrincipalAs sociation
30	Business identity is confirmed, but failure to verify all identity elements.	Several ID elements verified; SSN or address verification failures exist.	Principal's verified address matches input Business address and Principal's verified name partially matches input Business name.
40	Business identity is confirmed at the input address	Last name, address, and SSN verified; first name or phone verification failures.	Principal linked to Business by SSN /Tax Id match.
50	Business is verified using multiple sources. no contradictory findings.	Full name, address, phone, and SSN verified.	Principal is likely an officer or employee of Business confirmed by public records.

4.116 sdkVersion

The `sdkVersion` element is an optional child of several transaction types. You use this element to specify the SDK version you use to create your transactions.

Type = String; **minLength** = 1; **maxLength** = 60

Parent Elements:

[legalEntityAgreementCreateRequest](#), [legalEntityCreateRequest](#), [legalEntityPrincipalCreateRequest](#), [subMerchantCreateRequest](#)

Attributes:

None

Child Elements:

None

4.117 selectedTransactionType

The `selectedTransactionType` element is a required child of the `method` element and specifies the transaction type allowed for the method of payment specified by the `paymentType` element. Possible values are: NONE, REFUNDS_ONLY, DEPOSITS_ONLY, and DEPOSITS_AND_REFUNDS.

NOTE: Although the schema does not present this element as an enumeration, the values listed above are the only allowed values.

Type = String; minLength = N/A; maxLength = N/A

Parent Elements:

[method](#)

Attributes:

None

Child Elements:

None

4.118 settlementCurrency

The `settlementCurrency` element is a required child of the `subMerchantCreateRequest` element and defines the settlement currency of transactions from this Sub-merchant.

Type = String; minLength = 3; maxLength = 3

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.119 ssn

The `ssn` element is a child of the `principal` element and specifies the Social Security Number of the principal. If the `entityType` is `INDIVIDUAL_SOLE_PROPRIETORSHIP`, you must submit the principal's SSN. For other Legal Entity types, you can substitute the Tax ID for the SSN in this element.

IMPORTANT: The system validates the value for this element and generates an error for any of the following conditions:

- All blanks
- Circular numbers (e.g., 0123456789 or 3456789012)
- All the same digits
- Element omitted when `legalEntityType = INDIVIDUAL_SOLE_PROPRIETORSHIP`

Type = String; minLength = 9; maxLength = 25

Parent Elements:

[principal](#)

Attributes:

None

Child Elements:

None

4.120 ssnVerified

The `ssnVerified` element is an optional child of the `verificationIndicators` element, when `verificationIndicator` is a descendant of the `principal` element. A value of **true** indicates that the SSN of the principal was verified, while a value of **false** indicates that the SSN could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None

4.121 stakePercent

The `stakePercent` element is a required child of the `principal` element and defines the percentage of the Legal Entity owned by the principal.

Type = Integer; **Minimum value** = 0; **Maximum value** = 100

Parent Elements:

[principal](#)

Attributes:

None

Child Elements:

None

4.122 state

The state element is an optional child of both the `bankruptcyData` and `lienResults` elements, where it specifies the state of the company with bankruptcy or lien information.

Type = String; **minLength** = N/A; **maxLength** = 2

Parent Elements:

[bankruptcyData](#), [lienResult](#)

Attributes:

None

Child Elements:

None

4.123 stateVerified

The `cityVerified` element is an optional child of the `verificationIndicators` element, when `verificationIndicators` is a descendant of the `business` element. A value of **true** indicates that the city (of the business) was verified, while a value of **false** indicates that the city could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None

4.124 stateProvince

Depending upon where used, this is either the code representing the state of the business entity controlling the Sub-merchant or of the principal. This `stateProvince` element is always required for a Legal Entity and for a principal.

Type = String; minLength = 1; maxLength = 2

Parent Elements:

[address](#)

Attributes:

None

Child Elements:

None

4.125 streetAddress1, streetAddress2

The elements `streetAddress1` and `streetAddress2` define the address information. The `streetAddress1` element is always required for a Legal Entity. It is also required for the principal if the Legal Entity is a Sole Proprietorship (`legalEntityType`). The `streetAddress2` element is always optional.

IMPORTANT: The system validates the value for `streetAddress1` when a child of the `principal` element and generates an error for any of the following conditions:

- A single character
- Starts with a special character
- Contains a PO Box (This condition also applies to the `streetAddress2` element).

Type = String; minLength = 1; maxLength = 60

Parent Elements:

[address](#), [bankruptcyData](#), [lienResult](#)

Attributes:

None

Child Elements:

None

4.126 subMerchantCreateRequest

The `subMerchantCreateRequest` element is the parent element for the XML message used to create a Sub-merchant associated with a Legal Entity. You must create a Legal Entity prior to adding Sub-merchants controlled by the entity.

NOTE: After the creation of a Sub-merchant, wait a minimum of two minutes before attempting to process transactions for the Sub-merchant. This is the minimum amount of time required for information about the newly created Sub-merchant to propagate through our system. Attempts to process transactions for a new Sub-merchant sooner than two minutes will result in system errors.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and must be specified as: http://payfac.vantivcnp.com/api/merchant/onboard minLength = N/A maxLength = 50

Child Elements:

Required: [merchantName](#), [customerServiceNumber](#), [hardCodedBillingDescriptor](#), [maxTransactionAmount](#), [merchantCategoryCode](#), [bankRoutingNumber](#), [bankAccountNumber](#), [pspMerchantId](#), [address](#) (some child elements may be optional), [settlementCurrency](#)

Required/Optional (depending upon if using PayFac Assurance model): [url](#)

Optional: [address](#), [amexMid](#), [discoverConveyedMid](#), [purchaseCurrency](#), [primaryContact](#), [createCredentials](#), [eCheck](#), [fraud](#), [subMerchantFunding](#), [language](#), [sdkVersion](#), [merchantCategoryTypes](#), [methodOfPayments](#)

4.127 subMerchantCreateResponse

The `subMerchantResponse` element is the parent element for the XML message returned by the platform in response to a `subMerchantCreateRequest` message.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and must be specified as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50
duplicate	Boolean	No	Appears in the response message only if the <code>subMerchantCreateRequest</code> was a duplicate request. Allowed values = true or false

Child Elements:

Required: [transactionId](#), [merchantIdentString](#)

Optional: [subMerchantId](#), [originalSubMerchant](#)

4.128 subMerchantFunding

The `subMerchantFunding` element is an optional child of the `subMerchantCreateRequest`, the `subMerchantUpdateRequest` elements, as well as the `subMerchantRetrievalResponse`. Through its child elements, it defines either the Fee Profile applied to the funding of the Sub-merchant, when the Managed Payout funding feature is enabled, or the `fundingSubMerchantId`, when the Dynamic Payout feature is enabled.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

Attribute Name	Type	Required?	Description
enabled	Boolean	Yes	Set to true and include the <code>fundingSubmerchantId</code> element when using Dynamic Payout. Set to true and include the <code>feeProfile</code> element when using Managed Payout for the Sub-merchant. If neither condition applies (i.e., you are funding directly), set to false. Allowed values = true or false

Child Elements (optional):

[feeProfile](#) (required for Managed Payout), [fundingSubmerchantId](#) (required for Dynamic Payout)

Example: subMerchantFunding Structure for Managed Payout

```
<subMerchantFunding enabled="true">
  <feeProfile>Name of Fee Profile</feeProfile>
</subMerchantFunding>
```

Example: subMerchantFunding Structure for Dynamic Payout

```
<subMerchantFunding enabled="true">
  <fundingSubmerchantId>Unique Funding Id</fundingSubmerchantId>
</subMerchantFunding>
```

4.129 subMerchantId

The `subMerchantId` element is an optional child of the `subMerchantCreateResponse` element and is a system generated identifier for this Sub-merchant within the legal entity. You use this value as a parameter in the calls when updating, retrieving, and disabling a Sub-merchant.

NOTE: This value is unique within the Legal Entity, but not across Legal Entities.

Type = String; minLength = N/A; maxLength = 19

Parent Elements:

[subMerchantCreateResponse](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.130 sub_merchant_processing_status

The `sub_merchant_processing_status` element is a required child of the `legalEntityRetrievalResponse` and indicates if you can create sub-merchants associated with the Legal Entity, based upon the state of the Legal Entity. A value of true indicates that you can create sub-merchants.

Type = Boolean; **Allowed values** = true or false.

Parent Elements:

[legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.131 subMerchantRetrievalResponse

The `subMerchantRetrievalResponse` element is the parent element for the XML message returned by the platform in response to a Sub-merchant Retrieval Request.

NOTE: If you are processing transactions only on the Worldpay eCommerce platform and using Dynamic Payout, after creating a Sub-merchant using a value of `AUTO_GENERATE` for the `fundingSubmerchantId`, retrieve the assigned `fundingSubmerchantId` value by submitting a Sub-merchant Retrieval Request.

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and must be specified as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

`merchantName`, `amexMid`, `discoverConveyedMid`, `url`, `customerServiceNumber`, `hardCodedBillingDescriptor`, `maxTransactionAmount`, `purchaseCurrency`, `merchantCategoryCode`, `bankRoutingNumber`, `bankAccountNumber`, `pspMerchantId`, `fraud`, `address`, `primaryContact`, `createCredentials`, `eCheck`, `subMerchantFunding`, `settlementCurrency`, `subMerchantId`, `amexSellerId`, `disabled`, `transactionId`, `merchantIdString`, `credentials`, `paypageCredentials`, `updateDate`, `merchantCategoryTypes`, `methodOfPayments`

4.132 subMerchantUpdateRequest

The `subMerchantUpdateRequest` element is the parent element for the XML message used to update a Sub-merchant associated with a Legal Entity. You can update the following items:

- url
- customerServiceNumber
- hardCodedBillingDescriptor
- maxTransactionAmount
- bankRoutingNumber
- bankAccountNumber
- eCheckBillingDescriptor
- amexMid
- disable
- eCheck
- streetAddress1
- streetAddress2
- city
- stateProvince
- postalCode
- primaryContact
- eCheckCompanyName
- discoverConveyedMid
- fraud
- submerchantFunding

Parent Elements:

None

Attributes:

Attribute Name	Type	Required?	Description
xmlns	String	Yes	Defines the URI of the schema definition. This is a fixed location and must be specified as: <code>http://payfac.vantivcnp.com/api/merchant/onboard</code> minLength = N/A maxLength = 50

Child Elements:

[amexMid](#), [discoverConveyedMid](#), [url](#), [customerServiceNumber](#), [hardCodedBillingDescriptor](#), [maxTransactionAmount](#), [bankRoutingNumber](#), [bankAccountNumber](#), [address](#), [primaryContact](#), [disable](#), [fraud](#), [eCheck](#), [subMerchantFunding](#), [merchantCategoryTypes](#), [methodOfPayments](#)

4.133 taxAuthority

The `taxAuthority` element is an optional child of both the `submerchantCreateRequest` and the `submerchantUpdateRequest` elements; however, you must specify a value if the MCC of the sub-merchant is 9311 (Tax Payments - Government Agencies). The element specifies the Tax Authority (taxing body) for which the sub-merchant collects tax payments.

Type = String; **minLength** = N/A; **maxLength** = N/A

NOTE: Although `maxLength` is not defined in the schema, the maximum length of the `taxAuthority` + Billing Descriptor prefix cannot exceed 20 characters. Please ask your Implementation consultant for additional information.

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.134 taxAuthorityState

The `taxAuthorityState` element is an optional child of both the `submerchantCreateRequest` and the `submerchantUpdateRequest` elements; however, you must specify a value if the MCC of the sub-merchant is 9311 (Tax Payments - Government Agencies). The element specifies the state for which the sub-merchant collects tax payments.

Type = String; **minLength** = 1; **maxLength** = 2

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.135 taxId

The `taxId` element is a required child of the `legalEntityCreateRequest` element and defines the Tax ID (or EIN if applicable) of the Legal Entity controlling the Sub-merchants. If the `entityType` is `INDIVIDUAL_SOLE_PROPRIETORSHIP` and a Tax ID is not available, you can include the principal's SSN in this element.

IMPORTANT: The system validates the value for this element and generates an error for any of the following conditions:

- All blanks
- Circular numbers (e.g., 0123456789 or 3456789012)
- All the same digits
- String using non-numeric characters (e.g., 125sc2358 or 12587-654)

Type = String; minLength = 9; maxLength = 25

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.136 taxIdVerified

The `taxIdVerified` element is an optional child of the `verificationIndicators` element, when `verificationIndicators` is a descendant of the `business` element. A value of **true** indicates that the Tax Id (of the business) was verified, while a value of **false** indicates that the Tax Id could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None

4.137 tinValidationStatus

The `tinValidationStatus` element is an optional child of the `legalEntityRetrievalResponse` element and specifies the status of the Tax Id Number validation operation. Currently, possible values are: Approved, Failed, Pending, and Not Required.

Type = String; **minLength** = 1; **maxLength** = 20

Parent Elements:

[legalEntityRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.138 title

The `title` element is an optional child of the `principal` element that specifies the title of the principal. It is, however, required when your Organization is configured (in your Merchant Profile) to use the PayFac Assurance model. In this case, failure to include the element will result in a validation error.

NOTE: Although the title element is optional, you must include a value if you support American Express Opt Blue transactions.

Type = String; minLength = N/A; maxLength = 60

Parent Elements:

[principal](#)

Attributes:

None

Child Elements:

None

4.139 transactionId

The `transactionId` element is a required child of the `legalEntityResponse` element and is a system generated identifier for the submitted request.

Type = String; **minLength** = 1; **maxLength** = 19

Parent Elements:

[legalEntityAgreementCreateResponse](#), [legalEntityResponse](#), [legalEntityRetrievalResponse](#), [subMerchantCreateResponse](#), [response](#), [errorResponse](#), [subMerchantRetrievalResponse](#), [approvedMccResponse](#)

Attributes:

None

Child Elements:

None

4.140 unreleasedCount

The `unreleasedCount` element is an optional child of the `lienResult` element and specifies the count of unreleased lien records found.

Type = int; **totalDigits** = N/A

Parent Elements:

[lienResult](#)

Attributes:

None

Child Elements:

None

4.141 updateDate

The `updateDate` element is an optional child of both the `legalEntityRetrievalResponse` and the `subMerchantRetrievalResponse` element. The value represents the last date/time an update was performed to the Legal Entity/Sub-Merchant.

Type = dateTime; **Format** = YYYY-MM-DDTHH:MM:SS+/-HH:MM

NOTE: The +/-HH:MM portion of the dateTime format represents the offset from UTC time. For example, for Boston the value would be -05:00, meaning five hours behind UTC time.

Parent Elements:

[legalEntityRetrievalResponse](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.142 url

The `url` element is a required child of the `subMerchantCreateRequest` element and specifies the URL of the Sub-merchant.

Type = String; **minLength** = 1; **maxLength** = 120

Parent Elements:

[subMerchantCreateRequest](#), [subMerchantUpdateRequest](#), [subMerchantRetrievalResponse](#)

Attributes:

None

Child Elements:

None

4.143 userFullName

The `userFullName` element is a required child of the `legalEntityAgreement` element and defines name of the party signing the Legal Entity Agreement.

Type = String; minLength = 1; maxLength = 50

Parent Elements:

[legalEntityAgreement](#)

Attributes:

None

Child Elements:

None

4.144 userIPAddress

The `userIPAddress` element is a child of the `legalEntityAgreement` element and defines the IP Address of the party signing the Legal Entity Agreement. This element is required when the `manuallyEntered` element is set to **false**. It is not required when the `manuallyEntered` element is set to **true**. The only allowed characters are lower-case a-z, upper-case A-Z, numbers 0-9, colon (:), and a period (.).

Type = String; **minLength** = 1; **maxLength** = 40

Parent Elements:

[legalEntityAgreement](#)

Attributes:

None

Child Elements:

None

4.145 username

The `username` element is a required child of the `credentials` element and specifies the user name portion of the authentication credentials used to submit transaction to the production environment.

Type = String; **minLength** = 1; **maxLength** = 72

Parent Elements:

[credentials](#), [paypageCredential](#)

Attributes:

None

Child Elements:

None

4.146 userSystemName

The `userSystemName` element is a required child of the `legalEntityAgreement` element and defines name the party signing the Legal Entity Agreement uses on the your system.

Type = String; minLength = 1; maxLength = 50

Parent Elements:

[legalEntityAgreement](#)

Attributes:

None

Child Elements:

None

4.147 verificationIndicators

The `verificationIndicators` element is an optional child of the `verificationResult` element and contains child elements that indicated whether or not certain data points about the Legal Entity were verified during the background checks.

Parent Elements:

[verificationResult](#)

Attributes:

None

Child Elements:

Common: [nameVerified](#), [addressVerified](#), [phoneVerified](#)

Descendant of `bussiness`: [cityVerified](#), [stateVerified](#), [zipVerified](#), [taxIdVerified](#)

Descendant of `principal`: [ssnVerified](#), [dobVerified](#)

Example: verificationIndicators Structure (when descendant of `bussiness`)

```
<verificationIndicators>
  <nameVerified>true or false</nameVerified>
  <addressVerified>true or false</addressVerified>
  <cityVerified>true or false</cityVerified>
  <stateVerified>true or false</stateVerified>
  <zipVerified>true or false</zipVerified>
  <phoneVerified>true or false</phoneVerified>
  <taxIdVerified>true or false</taxIdVerified>
</verificationIndicators>
```

Example: verificationIndicators Structure (when descendant of `principal`)

```
<verificationIndicators>
  <nameVerified>true or false</nameVerified>
  <addressVerified>true or false</addressVerified>
  <phoneVerified>true or false</phoneVerified>
  <ssnVerified>true or false</ssnVerified>
  <dobVerified>true or false</dobVerified>
</verificationIndicators>
```


4.148 verificationResult

The `verificationResult` element is an optional child of the `business` and `principal` elements and contains child elements providing the results of background checks performed on the Legal Entity.

Parent Elements:

`business`, `principal`

Attributes:

None

Child Elements:

Common: `overallScore`, `nameAddressPhoneAssociation`, `verificationIndicators`, `riskIndicators`

Descendant of `business`: `nameAddressTaxIdAssociation`

Descendant of `principal`: `nameAddressSsnAssociation`

Example: verificationResult Structure (as child of `business`)

```
<verificationResult>
  <overallScore>
    <score>Overall results for Business</score>
    <description>Text Description of Score</description>
  </overallScore>
  <nameAddressTaxIdAssociation>
    <code>Name_Address_TIN_info</code>
    <description>Text Description of Code</description>
  </nameAddressTaxIdAssociation>
  <nameAddressPhoneAssociation>
    <code>Name_Address_Phone_info</code>
    <description>Text Description of Code</description>
  </nameAddressPhoneAssociation>
  <verificationIndicators>
    <nameVerified>true or false</nameVerified>
    <addressVerified>true or false</addressVerified>
    <cityVerified>true or false</cityVerified>
    <zipVerified>true or false</zipVerified>
    <phoneVerified>true or false</phoneVerified>
    <taxIdVerified>true or false</taxIdVerified>
  </verificationIndicators>
</verificationResult>
```

```

<riskIndicators>
  <riskIndicator>
    <code>Risk Indicator Info</code>
    <description>Text Description of Code</description>
  </riskIndicator>
</riskIndicators>
</verificationResult

```

Example: verificationResult Structure (as child of principal)

```

<verificationResult>
  <overallScore>
    <score>Overall Results for Principal</score>
    <description>Text Description of Score</description>
  </overallScore>
  <nameAddressSsnAssociation>
    <code>Name_Address_SSN_info</code>
    <description>Text Description of Code</description>
  </nameAddressSsnAssociation>
  <nameAddressPhoneAssociation>
    <code>Name_Address_Phone_info</code>
    <description>Text Description of Code</description>
  </nameAddressPhoneAssociation>
  <verificationIndicators>
    <nameVerified>true or false</nameVerified>
    <addressVerified>true or false</addressVerified>
    <phoneVerified>true or false</phoneVerified>
    <ssnVerified>true or false</ssnVerified>
    <dobVerified>true or false</dobVerified>
  </verificationIndicators>
  <riskIndicators>
    <riskIndicator>
      <code>Risk Indicator results</code>
      <description>Text Description of Code</description>
    </riskIndicator>
  </riskIndicators>
</verificationResult>

```

4.149 yearsInBusiness

The `yearsInBusiness` element is an optional child of the `legalEntityCreateRequest` element. It is, however, required when your Organization is configured (in your Merchant Profile) to use the PayFac Assurance model. In this case, failure to include this element will result in a validation error.

Type = Integer; **minLength** = N/A; **maxLength** = 3

Parent Elements:

[legalEntityCreateRequest](#), [legalEntityUpdateRequest](#)

Attributes:

None

Child Elements:

None

4.150 zip

The `zip` element defines the company postal code in both the `bankruptcyData` and `lienResults` elements. The element is optional.

Type = String; **minLength** = N/A; **maxLength** = 5

Parent Elements:

[bankruptcyData](#), [lienResult](#)

Attributes:

None

Child Elements:

None

4.151 zip4

The `zip4` element defines the extended +4 portion of the company postal code in both the `bankruptcyData` and `lienResults` elements. The element is optional.

Type = String; **minLength** = N/A; **maxLength** = 4

Parent Elements:

[bankruptcyData](#), [lienResult](#)

Attributes:

None

Child Elements:

None

4.152 zipVerified

The `zipVerified` element is an optional child of the `verificationIndicators` element, when `verificationIndicators` is a descendant of the `business` element. A value of **true** indicates that the zip code (of the business) was verified, while a value of **false** indicates that the zip code could not be verified.

Type = Boolean; **Allowed values** = true or false

Parent Elements:

[verificationIndicators](#)

Attributes:

None

Child Elements:

None